



AS4 Profile of ebMS 3.0 Version 1.0

Committee Specification 02

13 August 2011

Specification URIs

This version:

<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/AS4-profile/v1.0/cs02/AS4-profile-v1.0-cs02.odt> (Authoritative)
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/AS4-profile/v1.0/cs02/AS4-profile-v1.0-cs02.html>
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/AS4-profile/v1.0/cs02/AS4-profile-v1.0-cs02.pdf>

Previous version:

<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/200707/csd03/AS4-profile-csd03.odt> (Authoritative)
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/200707/csd03/AS4-profile-csd03.html>
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/200707/csd03/AS4-profile-csd03.pdf>

Latest version:

<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/AS4-profile/v1.0/AS4-profile-v1.0.odt> (Authoritative)
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/AS4-profile/v1.0/AS4-profile-v1.0.html>
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/AS4-profile/v1.0/AS4-profile-v1.0.pdf>

Technical Committee:

OASIS ebXML Messaging Services TC

Chairs:

Makesh Rao (marao@cisco.com), Cisco Systems, Inc.
Sander Fieten (sander@fieten-it.com), Individual

Editors:

Jacques Durand (jdurand@us.fujitsu.com), Fujitsu America Inc.
Pim van der Eijk (pvde@sonnenglanz.net), Sonnenglanz Consulting

Related work:

This specification is related to:

- *OASIS ebXML Messaging Services Version 3.0: Part 1, Core Features*. 01 October 2007. OASIS Standard.
http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/core/os/ebms_core-3.0-spec-os.html
- *OASIS ebXML Messaging Services Version 3.0: Part 2, Advanced Features*. Latest version.
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/part2/201004/ebms-v3-part2.html>

Declared XML namespace:

<http://docs.oasis-open.org/ebxml-msg/ns/ebms/v3.0/profiles/200707>

Abstract:

While ebMS 3.0 represents a leap forward in reducing the complexity of Web Services B2B messaging, the specification still contains numerous options and comprehensive alternatives for addressing a variety of scenarios for exchanging data over a Web Services platform. The AS4 profile of the ebMS 3.0 specification has been developed in order to bring continuity to the principles and simplicity that made AS2 successful, while adding better compliance to Web Services standards, and features such as message pulling capability and a built-in Receipt mechanism. Using ebMS 3.0 as a base, a subset of functionality is defined along with implementation guidelines adopted based on the “just-enough” design principles and AS2 functional requirements to trim down ebMS 3.0 into a more simplified and AS2-like specification for Web Services B2B messaging. This document defines the AS4 profile as a combination of a conformance profile that concerns an implementation capability, and of a usage profile that concerns how to use this implementation. A couple of variants are defined for the AS4 conformance profile - the AS4 ebHandler profile and the AS4 Light Client profile - that reflect different endpoint capabilities.

Status:

This document was last revised or approved by the OASIS ebXML Messaging Services TC on the above date. The level of approval is also listed above. Check the "Latest version" location noted above for possible later revisions of this document.

Technical Committee members should send comments on this specification to the Technical Committee's email list. Others should send comments to the Technical Committee by using the “Send A Comment” button on the Technical Committee’s web page at <http://www.oasis-open.org/committees/ebxml-msg/>

For information on whether any patents have been disclosed that may be essential to implementing this specification, and any offers of patent licensing terms, please refer to the Intellectual Property Rights section of the Technical Committee web page at <http://www.oasis-open.org/committees/ebxml-msg/ipr.php>

Citation format:

When referencing this specification the following citation format should be used:

[AS4-Profile]

AS4 Profile of ebMS 3.0 Version 1.0. 13 August 2011. OASIS Committee Specification 02.
<http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/AS4-profile/v1.0/cs02/AS4-profile-v1.0-cs02.html>

Notices

Copyright © OASIS Open 2011. All Rights Reserved.

All capitalized terms in the following text have the meanings assigned to them in the OASIS Intellectual Property Rights Policy (the "OASIS IPR Policy"). The full [Policy](#) may be found at the OASIS website.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to OASIS, except as needed for the purpose of developing any document or deliverable produced by an OASIS Technical Committee (in which case the rules applicable to copyrights, as set forth in the OASIS IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by OASIS or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and OASIS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

OASIS requests that any OASIS Party or any other party that believes it has patent claims that would necessarily be infringed by implementations of this OASIS Committee Specification or OASIS Standard, to notify OASIS TC Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification.

OASIS invites any party to contact the OASIS TC Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this specification by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification. OASIS may include such claims on its website, but disclaims any obligation to do so.

OASIS takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on OASIS' procedures with respect to rights in any document or deliverable produced by an OASIS Technical Committee can be found on the OASIS website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this OASIS Committee Specification or OASIS Standard, can be obtained from the OASIS TC Administrator. OASIS makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

The name "OASIS" is a trademark of [OASIS](#), the owner and developer of this specification, and should be used only to refer to the organization and its official outputs. OASIS welcomes reference to, and implementation and use of, specifications, while reserving the right to enforce its marks against misleading uses. Please see <http://www.oasis-open.org/who/trademark.php> for above guidance.

Table of Contents

1 Introduction.....	6
1.1 Rationale and Context.....	6
1.2 Terminology.....	7
1.3 Normative References.....	7
1.4 Non-normative References.....	8
2 AS4 Conformance Profiles for ebMS V3 Core Specification	10
2.1 The AS4 ebHandler Conformance Profile.....	10
2.1.1 Features Set.....	10
2.1.2 WS-I Conformance Profiles.....	13
2.1.3 Processing Mode Parameters.....	13
2.1.3.1 General P-Mode parameters.....	13
2.1.3.2 PMode[1].Protocol.....	14
2.1.3.3 PMode[1].BusinessInfo.....	14
2.1.3.4 PMode[1].ErrorHandling.....	14
2.1.3.5 PMode[1].Reliability.....	14
2.1.3.6 PMode[1].Security.....	15
2.2 The AS4 Light Client Conformance Profile.....	15
2.2.1 Feature Set.....	15
2.2.2 WS-I Conformance Requirements.....	17
2.2.3 Processing Mode Parameters.....	17
2.2.3.1 General P-Mode parameters.....	18
2.2.3.2 PMode[1].Protocol.....	18
2.2.3.3 PMode[1].BusinessInfo.....	18
2.2.3.4 PMode[1].ErrorHandling.....	18
2.2.3.5 Pmode[1].Reliability.....	19
2.2.3.6 PMode[1].Security.....	19
2.3 Conformance Profiles Compatibility.....	19
3 AS4 Additional Features.....	20
3.1 Compression.....	20
3.2 Reception Awareness features and Duplicate Detection.....	21
3.3 Alternative Pull Authorization.....	22
3.4 Semantics of Receipt in AS4.....	22
4 Complementary Requirements for the AS4 Multi-Hop Profile	24
4.1 Rationale and Context	24
4.2 General Constraints.....	25
4.3 Processing Mode Parameter.....	25
4.4 AS4 Endpoint Requirements.....	25
5 AS4 Usage Profile of ebMS 3.0 Core Specification	27
5.1 AS4 Usage Rules.....	27
5.1.1 Core Components / Modules to be Used.....	27
5.1.2 Bundling rules.....	28
5.1.3 Security Element.....	29
5.1.4 Signing Messages.....	29
5.1.5 Signing SOAP with Attachments Messages.....	29
5.1.6 Encrypting Messages.....	30
5.1.7 Encrypting SOAP with Attachments Messages.....	30

5.1.8 Generating Receipts.....	30
5.1.9 MIME Header and Filename information.....	32
5.2 AS4 Usage Agreements.....	32
5.2.1 Controlling Content and Sending of Receipts.....	32
5.2.2 Error Handling Options.....	33
5.2.3 Securing the PullRequest.....	34
5.2.4 Reception Awareness Parameters.....	35
5.2.5 Default Values of Some P-Mode Parameters.....	36
5.2.6 HTTP Confidentiality and Security.....	36
5.2.7 Deployment and Processing requirements for CPAs.....	37
5.2.8 Message Payload and Flow Profile.....	37
5.2.9 Additional Deployment or Operational Requirements.....	38
6 Conformance Clauses.....	39
6.1 AS4 ebHandler Conformance Clause.....	39
6.2 AS4 Light Client Conformance Clause.....	39
6.3 AS4 Minimal Client Conformance Clause.....	39
6.4 AS2/AS4 ebHandler Conformance Clause.....	40
6.5 AS4 Multi-Hop Endpoint Conformance Clause.....	40
Appendix A Sample Messages.....	41
Appendix A.1 User Message	41
Appendix A.2 Non-Repudiation of Receipt.....	42
Appendix A.3 Pull Request Signal Message.....	43
Appendix B Generating an AS4 Receipt	45
Appendix C Acknowledgments.....	47
Appendix D Revision History.....	48

1 Introduction

1.1 Rationale and Context

Historically, the platform for mission-critical business-to-business (B2B) transactions has steadily moved from proprietary value-added networks (VANs) to Internet-based protocols free from the data transfer fees imposed by the VAN operators. This trend has been accelerated by lower costs and product ownership, a maturing of technology, internationalization, widespread interoperability, and marketplace momentum. The exchange of EDI business documents over the Internet has substantially increased along with a growing presence of XML and other document types such as binary and text files.

The Internet messaging services standards that have emerged provide a variety of options for end users to consider when deciding which standard to adopt. These include pre-Internet protocols, the EDIINT series of AS1 [RFC3335] AS2 [RFC4130] and AS3 [RFC4823], simple XML over HTTP, government specific frameworks, ebMS 2.0 [ebMS2], and Web Services variants. As Internet messaging services standards have matured, new standards are emerging that leverage prior B2B messaging services knowledge for applicability to Web Services messaging.

The emergence of the OASIS ebMS 3.0 Standard [ebMS3CORE] represents a leap forward in Web Services B2B messaging services by meeting the challenge of composing many Web Services standards into a single comprehensive specification for defining the secure and reliable exchange of documents using Web Services. The ebMS 3.0 standard composes fundamental Web Services standards SOAP 1.1 [SOAP11], SOAP 1.2 [SOAP12], SOAP with Attachments [SOAPATTACH], WS-Security 1.0 [WSS10], WS-Security 1.1 [WSS11], WS-Addressing [WSADDRCORE], and reliable messaging (WS-Reliability 1.1 [WSR11] or WS-ReliableMessaging - currently at version 1.2 [WSRM12]) together with guidance for the packaging of messages and receipts along with definitions of messaging choreographies for orchestrating document exchanges.

Like AS2, ebMS 3.0 brings together many existing standards that govern the packaging, security, and transport of electronic data under the umbrella of a single specification document. While ebMS 3.0 represents a leap forward in reducing the complexity of Web Services B2B messaging, the specification still contains numerous options and comprehensive alternatives for addressing a variety of scenarios for exchanging data over a Web Services platform.

In order to fully take advantage of the AS2 success story, this profile of the ebMS 3.0 specification has been developed. Using ebMS 3.0 as a base, a subset of functionality has been defined along with implementation guidelines adopted based on the “just-enough” design principles and AS2 functional requirements to trim down ebMS 3.0 into a more simplified and AS2-like specification for Web Services B2B messaging. The main benefits of AS4 compared to AS2 are:

- Compatibility with Web services standards.
- Message pulling capability.
- A built-in Receipt mechanism

Profiling ebMS V3 means:

- Defining a subset of ebMS V3 options to be supported by the AS4 handler.
- Deciding which types of message exchanges must be supported, and how these exchanges should be conducted (level of security, binding to HTTP, etc.).
- Deciding of AS4-specific message contents and practices (how to make use of the ebMS message header fields, in an AS4 context).
- Deciding of some operational best practices, for the end-user.

The overall goal of a profile for a standard is to ensure interoperability by:

- 45 ● Establishing particular usage and practices of the standard within a community of users.
- 46 ● Defining the subset of features in this standard that needs to be supported by an implementation.

47 Two kinds of profiles are usually to be considered when profiling an existing standard:

- 48 1. **Conformance Profiles.** These define the different ways a product can conform to a standard,
49 based on specific ways to implement this standard. A conformance profile is usually associated
50 with a specific conformance clause. Conformance profiles are of prime interest for product
51 managers and developers: they define a precise subset of features to be supported.
- 52 2. **Usage Profiles** (also called Deployment Profiles). These define how a standard should be used
53 by a community of users, in order to ensure best compatibility with business practices and
54 interoperability. Usage profiles are of prime interest for IT end-users: they define how to configure
55 the use of a standard (and related product) as well as how to bind this standard to business
56 applications. A usage profile usually points at required or compatible conformance profile(s).

57 AS4 is defined as a combination of:

- 58 ● Two primary AS4 conformance profiles (see section 2) that define two subsets of ebMS V3
59 features, one of which is to be supported by an AS4 implementation.
- 60 ● An optional complementary conformance profile (see section 4) that specifies how to use AS4
61 endpoints with ebMS 3.0 intermediaries. This is based on a simplified subset of the multi-hop
62 messaging feature defined in ebMS 3.0 Part 2, Advanced Features specification [ebMS3ADV].
- 63 ● An AS4 Usage Profile (see section 5) that defines how to use an AS4-compliant implementation
64 in order to achieve similar functions as specified in AS2.

65 The two primary AS4 conformance profiles (CP) are defined below:

- 66 (1) The **AS4 ebHandler CP**. This conformance profile supports both Sending and Receiving
67 roles, and for each role both message pushing and message pulling.
- 68 (2) The **AS4 Light Client CP**. This conformance profile supports both Sending and Receiving
69 roles, but only message pushing for Sending and message pulling for Receiving. In other words, it
70 does not support incoming HTTP requests, and may have no fixed IP address.

71 Compatible existing conformance profiles for ebMS V3 are:

- 72 ● Gateway RM V3 or Gateway RX V3: a Message Service Handler (MSH) implementing any of
73 these profiles will also be conforming to the AS4 ebHandler CP (the reverse is not true).

74 NOTE: Full compliance to AS4 actually requires and/or authorizes a message handler to implement a few
75 additional features beyond the above CPs, as described in the Conformance section 6. These additional
76 features are described in Section 3.

77 1.2 Terminology

78 The keywords "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD
79 NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this specification are to be interpreted as
80 described in IETF RFC 2119.

81 1.3 Normative References

- 82 **[ebBP-SIG]** OASIS *ebXML Business Signals Schema*, 21 December 2006. OASIS Standard.
83 <http://docs.oasis-open.org/ebxml-bp/ebbp-signals-2.0>
- 84 **[ebMS3CORE]** OASIS *ebXML Messaging Services Version 3.0: Part 1, Core Features*, 1 October
85 2007, OASIS Standard. [http://docs.oasis-open.org/ebxml-
msg/ebms/v3.0/core/ebms_core-3.0-spec.pdf](http://docs.oasis-open.org/ebxml-
86 msg/ebms/v3.0/core/ebms_core-3.0-spec.pdf)

87 **[ebMS3ADV]** *OASIS ebXML Messaging Services Version 3.0: Part 2, Advanced Features.* Committee Specification Draft, 30 June 2011. OASIS Committee Specification Draft. <http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/part2/201004/ebms-v3-part2-cd-01.odt>

88

89

90

91 **[ebMS3-CP]** *OASIS ebXML Messaging Services, Version 3.0: Conformance Profiles.* OASIS Committee Specification 24 April 2010. <http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/profiles/200707/ebms3-confprofiles.pdf>

92

93

94 **[RFC1952]** *GZIP file format specification version 4.3.* IETF RFC. May 1996. <http://tools.ietf.org/html/rfc1952>

95

96 **[RFC2119]** *Key words for use in RFCs to Indicate Requirement Levels.* IETF RFC. March 1997. <http://www.ietf.org/rfc/rfc2119.txt>

97

98 **[RFC2045]** *Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies.* IETF RFC. November 1996. <http://www.ietf.org/rfc/rfc2045.txt>

99

100 **[SOAP12]** *SOAP Version 1.2 Part 1: Messaging Framework.* W3C Recommendation. 27 April 2007. <http://www.w3.org/TR/soap12-part1/>

101

102 **[SOAPATTACH]** *SOAP Messages with Attachments,* W3C Note. 11 December 2000. <http://www.w3.org/TR/SOAP-attachments>

103

104 **[WSADDRCORE]** *Web Services Addressing 1.0 – Core.* W3C Recommendation. 9 May 2006. <http://www.w3.org/TR/2006/REC-ws-addr-core-20060509/>

105

106 **[WSIAP10]** *WS-I Attachments Profile Version 1.0,* WS-I Final Material. 20 April 2004. <http://www.ws-i.org/Profiles/AttachmentsProfile-1.0.html>

107

108 **[WSIBP20]** *Basic Profile Version 2.0,* WS-I Final Material. 9 November 2010. <http://ws-i.org/Profiles/BasicProfile-2.0-2010-11-09.html>

109

110 **[WSIBSP11]** *Basic Security Profile Version 1.1,* WS-I Final Material. 24 January 2010. <http://www.ws-i.org/Profiles/BasicSecurityProfile-1.1.html>

111

112 **[WSS11]** *Web Services Security: SOAP Message Security 1.1.* OASIS Standard incorporating Approved Errata. 1 November 2006, <http://docs.oasis-open.org/wss/v1.1/wss-v1.1-spec-errata-os-SOAPMessageSecurity.pdf>

113

114

115 **[WSS11-UT]** *Web Services Security UsernameToken Profile 1.1.* OASIS Standard. 1 February 2006. <http://docs.oasis-open.org/wss/v1.1/wss-v1.1-spec-os-UsernameTokenProfile.pdf>.

116

117

118 **[WSS11-X509]** *Web Services Security X.509 Certificate Token Profile 1.1.* OASIS Standard incorporating Approved Errata. 1 November 2006. <http://docs.oasis-open.org/wss/v1.1/wss-v1.1-spec-errata-os-x509TokenProfile.pdf>

119

120

121 **[XMLDSIG]** *XML-Signature Syntax and Processing (Second Edition).* W3C Recommendation. 10 June 2008. <http://www.w3.org/TR/xmlsig-core/>

122

123 **[XMLENC]** *XML Encryption Syntax and Processing.* W3C Recommendation. 10 December, 2002. <http://www.w3.org/TR/xmlenc-core/>

124

125 **1.4 Non-normative References**

126 **[CII]** *UN/CEFACT Cross Industry Invoice Version 2.0.* UN/CEFACT Standard. http://www.unece.org/unecefact/data/standard/CrossIndustryInvoice_2p0.xsd

127

128 **[ebCorePartyId]** *OASIS ebCore Party Id Type Technical Specification Version 1.0.* OASIS Committee Specification, 28 September 2010. <http://docs.oasis-open.org/ebcore/PartyIdType/v1.0/PartyIdType-1.0.odt>

129

130

131 **[ebBP]** *OASIS ebXML Business Process Specification Schema Technical Specification v2.0.4.* OASIS Standard, 21 December 2006. <http://docs.oasis-open.org/ebxml-bp/2.0.4/ebxmlbp-v2.0.4-Spec-os-en.odt>

132

133

134 **[ebCPPA]** *Collaboration-Protocol Profile and Agreement Specification Version 2.0*. OASIS
135 *Standard*, September, 2002. [http://www.oasis-open.org/committees/ebxml-](http://www.oasis-open.org/committees/ebxml-cppa/documents/ebcpp-2.0.pdf)
136 [cppa/documents/ebcpp-2.0.pdf](http://www.oasis-open.org/committees/ebxml-cppa/documents/ebcpp-2.0.pdf)

137 **[ebMS2]** *Message Service Specification Version 2.0*, OASIS Standard. 1 April 2002.
138 http://www.oasis-open.org/committees/ebxml-msg/documents/ebMS_v2_0.pdf

139 **[GLN]** GS1 Global Location Number (GLN).
140 <http://www.gs1.org/barcodes/technical/idkeys/gln>

141 **[IIC-DP]** *Deployment Profile Template For OASIS ebXML Message Service 2.0 Standard*.
142 OASIS Public Review Draft, 4 December 2006. [http://docs.oasis-open.org/ebxml-](http://docs.oasis-open.org/ebxml-iic/ebXML_DPT-v1.1-ebMS2-template-pr-01.pdf)
143 [iic/ebXML_DPT-v1.1-ebMS2-template-pr-01.pdf](http://docs.oasis-open.org/ebxml-iic/ebXML_DPT-v1.1-ebMS2-template-pr-01.pdf)

144 **[RFC3335]** *MIME-based Secure Peer-to-Peer Business Data Interchange over the Internet*
145 *(AS1)*. IETF RFC, September 2002. <http://tools.ietf.org/html/rfc3335>

146 **[RFC3798]** *Message Disposition Notification*. IETF RFC, May 2004.
147 <http://tools.ietf.org/html/rfc3798>

148 **[RFC4130]** *MIME-Based Secure Peer-to-Peer Business Data Interchange Using HTTP,*
149 *Applicability Statement 2 (AS2)*. IETF RFC, July 2005.
150 <http://tools.ietf.org/rfc/rfc4130>

151 **[RFC4823]** *FTP Transport for Secure Peer-to-Peer Business Data Interchange over the*
152 *Internet (AS3)*. IETF RFC, April 2007. <http://tools.ietf.org/html/rfc4823>

153 **[SOAP11]** *Simple Object Access Protocol (SOAP) 1.1*, W3C Note. 08 May 2000.
154 <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

155 **[WSIBP12]** *Basic Profile Version 1.2*. WS-I Final Material. 09 November 2010. [http://ws-](http://ws-i.org/Profiles/BasicProfile-1.2-2010-11-09.html)
156 [i.org/Profiles/BasicProfile-1.2-2010-11-09.html](http://ws-i.org/Profiles/BasicProfile-1.2-2010-11-09.html)

157 **[WSR11]** *WS-Reliability 1.1*. OASIS Standard, 15 November 2004. [http://docs.oasis-](http://docs.oasis-open.org/wsrn/ws-reliability/v1.1/wsrn-ws_reliability-1.1-spec-os.pdf)
158 [open.org/wsrn/ws-reliability/v1.1/wsrn-ws_reliability-1.1-spec-os.pdf](http://docs.oasis-open.org/wsrn/ws-reliability/v1.1/wsrn-ws_reliability-1.1-spec-os.pdf)

159 **[WSRM12]** *Web Services Reliable Messaging (WS-ReliableMessaging) Version 1.2*, OASIS
160 *Standard*. 2 February 2009, [http://docs.oasis-open.org/ws-rx/wsrn/200702/wsrn-](http://docs.oasis-open.org/ws-rx/wsrn/200702/wsrn-1.2-spec-os.doc)
161 [1.2-spec-os.doc](http://docs.oasis-open.org/ws-rx/wsrn/200702/wsrn-1.2-spec-os.doc)

162 **[WSS10]** *Web Services Security: SOAP Message Security 1.0*, 2004. [http://docs.oasis-](http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-soap-message-security-1.0.pdf)
163 [open.org/wss/2004/01/oasis-200401-wss-soap-message-security-1.0.pdf](http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-soap-message-security-1.0.pdf)

164

2 AS4 Conformance Profiles for ebMS V3 Core Specification

165
166

167 NOTE: AS4 is more than a conformance profile, in the sense given in [ebMS3-CP]. It is a combination of
168 a conformance profile and a usage profile, as explained in the introduction section. Consequently, only this
169 section (section 2) is conforming to the format recommended in [ebMS3-CP] for describing conformance
170 profiles. The usage profile part (section 5) is following a format based on tables similar to those found in
171 [IIC-DP].

2.1 The AS4 ebHandler Conformance Profile

172

173 The AS4 ebHandler is identified by the URI:

174 <http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/cprofiles/200809/as4ebhandler>

175 (Note: this URI is only an identifier, not a document address.)

2.1.1 Features Set

176

177 The AS4 CP is defined as follows, using the table template and terminology provided in Appendix A
178 (“Conformance”) of the core ebXML Messaging Services V3.0 Conformance Profiles specification
179 [ebMS3-CP].

Conformance Profile: AS4 ebHandler	Profile summary: <“Sending+Receiving” / “AS4 eb Handler” / Level 1 / HTTP1.1 + SOAP 1.2 + WSS1.1 >
Functional Aspects	Profile Feature Set
ebMS MEP	<p>Both Sender and Receiver MUST support the following ebMS simple Message Exchange Patterns (MEPs):</p> <ul style="list-style-type: none"> ● One-way / Push ● One-way / Pull <p>Regardless of which MEP is used, the sending of an eb:Receipt message MUST be supported:</p> <ul style="list-style-type: none"> ● For the One-way / Push, both “response” and “callback” reply patterns MUST be supported. ● For the One-way / Pull, the “callback” pattern is the only viable option, and the User message sender MUST be ready to accept an eb:Receipt either piggybacked on (or bundled with) a PullRequest, or piggybacked on another User Message, or sent separately. <p>In all MEPs, the User message receiver MUST be able to send an eb:Receipt as a separate message (i.e. not piggybacked on a PullRequest message or on another User message). An MSH conforming to this profile is therefore NOT required to bundle an eb:Receipt with any other ebMS header or message body.</p> <p>Use of the ebbpsig:NonRepudiationInformation element (as defined in [ebBP-SIG]) is REQUIRED as content for the eb:Receipt message, i.e. when conforming</p>

	<p>to this profile a Sending MSH must be able to create a Receipt with such a content, and a Receiving MSH must be able to process it.</p>
<p>Reliability</p>	<p>Reception Awareness, defined as the ability for a Sending ebHandler to notify its application (message Producer) of lack of reception of an eb:Receipt related to a sent message, MUST be supported. This implies support for:</p> <ul style="list-style-type: none"> ● Correlating eb:Receipts with previously sent User messages, based on the ebMS message ID ● Detection of a missing eb:Receipt for a sent message ● Ability to report an error to the message Producer in case no eb:Receipt has been received for a sent message. <p>The semantics for sending back an eb:Receipt message is as follows: a well-formed ebMS user message has been received and the MSH is taking responsibility for its processing (additional application-level delivery semantics, and payload validation semantics are not relevant).</p> <p>Support for a WS reliable messaging specification is optional .</p>
<p>Security</p>	<p>The following security features MUST be supported:</p> <ul style="list-style-type: none"> ● Support for username / password token, digital signatures and encryption. ● Support for content-only transforms. ● Support for security of attachments. ● Support for message authorization at P-Mode level (see 7.10 in [ebMS3CORE]) Authorization of the Pull signal , for a particular MPC , must be supported at minimum. <p>Two authorization options MUST be supported by an MSH in the Receiving role, and at least one of them in the Sending role:</p> <ul style="list-style-type: none"> ● Authorization Option 1: Use of the WSS security header targeted to the “ebms” actor, as specified in section 7.10 of ebMS V3, with the wsse:UsernameToken profile. This header may either come in addition to the regular wsse security header (XMLDsig for authentication), or may be the sole wsse header, if a transport-level secure protocol such as SSL or TLS is used. ● Authorization Option 2: Use of a regular wsse security header (XMLDsig for authentication, use of X509), and no additional wsse security header targeted to “ebms”. In that case, the MSH must be able to use the credential present in this security header for Pull authorization, i.e. to associate these with a specific MPC. <p>NOTE on XMLDsig: XMLDsig allows arbitrary XSLT transformations when constructing the plaintext over which a signature or reference is created. Conforming applications that allow use of XSLT transformations when verifying either signatures or references are encouraged to maintain lists of “safe” transformations for a given partner, service, action and role combination. Static analysis of XSLT expressions with a human user audit is encouraged for trusting a given expression as “safe” .</p>

Error generation and reporting	<p>The following error processing capabilities MUST be supported:</p> <ul style="list-style-type: none"> ● Capability of the Receiving MSH to report errors from message processing, either as ebMS error messages or as SOAP Faults to the Sending MSH. The following modes of reporting to a Sending MSH are supported: <ul style="list-style-type: none"> ● Sending error as a separate request (ErrorHandling.Report.ReceiverErrorsTo=<URL of Sending MSH>) ● Sending error on the back channel of the underlying protocol (ErrorHandling.Report.AsResponse="true"). ● Capability to report to a third-party address (ErrorHandling.Report.ReceiverErrorsTo=<other address>). ● Capability of Sending MSH to report generated errors as notifications to the message producer (support for Report.ProcessErrorNotifyProducer="true")(e.g. delivery failure). ● Generated errors: All specified errors in [ebMS3CORE] must be generated when applicable, except for EBMS:0010: On a Receiving MSH, there is no requirement to generate error EBMS:0010 for discrepancies between message header and the P-Mode.reliability and P-Mode.security features. It is required to generate such errors, on a Receiving MSH, for other discrepancies
Message Partition Channels	<p>Message partition channels (MPC) MUST be supported in addition to the default channel, so that selective pulling by a partner MSH is possible. This means AS4 handlers MUST be able to use the @mpc attribute and to process it as expected.</p>
Message packaging	<p>The following features MUST be supported both on sending and receiving sides:</p> <ul style="list-style-type: none"> ● Support for attachments. ● Support for MessageProperties. ● Support for processing messages that contain both a signal message unit (eb:SignalMessage) and a user message unit (eb:UserMessage).
Interoperability Parameters	<p>The following interoperability parameters values MUST be supported for this conformance profile:</p> <ul style="list-style-type: none"> ● Transport: HTTP 1.1 ● SOAP version: 1.2 ● Reliability Specification: none. ● Security Specification: WSS 1.1.

180 2.1.2 WS-I Conformance Profiles

181 The Web-Services Interoperability consortium has defined guidelines for interoperability of SOAP
182 messaging implementations. In order to ensure maximal interoperability across different SOAP stacks, eg.
183 MIME and HTTP implementations, compliance with the following WS-I profiles is REQUIRED whenever
184 related features are used:

- 185 ● Basic Security Profile (BSP) 1.1 [WSIBSP11].
- 186 ● Attachment Profile (AP) 1.0 [WSIAP10] with regard to the use of MIME and SOAP with
187 Attachments.

188 Notes:

- 189 ● Compliance with AP1.0 would normally require compliance with BP1.1, which in turn requires the
190 absence of a SOAP Envelope in the HTTP response of a One-Way MEP (R2714). However,
191 recent BP versions such as BP1.2 [WSIBP12] and BP2.0 [WSIBP20] override this requirement.
192 Consequently, the AS4 ebHandler conformance profile does not require conformance to these
193 deprecated requirements inherited from BP1.1 (R2714, R1143) regarding the use of HTTP.
- 194 ● WS-I compliance is here understood as requiring that the features exhibited by an AS4 ebHandler
195 MUST comply with the above WS-I profiles. For example, since only SOAP 1.2 is required by the
196 AS4 ebHandler, the requirements from BSP 1.1 that depend on SOAP 1.1 would not apply.
197 Similarly, none of the requirements for DESCRIPTION (WSDL) or REGDATA (UDDI) apply here,
198 as these are not used.

199 This conformance profile also requires conformance to the following WS-I profiles :

- 200 ● Basic Profile 2.0 (BP2.0) [WSIBP20].

201 2.1.3 Processing Mode Parameters

202 This section contains a summary of P-Mode parameters relevant to AS4 features for this conformance
203 profile. An AS4 handler MUST support and understand those that are mentioned as "required". For each
204 parameter, either:

- 205 ● Full support is required: An implementation MUST support the possible options for this
206 parameter.
- 207 ● Partial support is required: Support for a subset of values is required.
- 208 ● No support is required: An implementation is not required to support the features controlled by this
209 parameter, and therefore is not required to understand this parameter.

210 An AS4 handler is expected to support the P-Mode set below both as a Sender (of the user message) and
211 as a Receiver.

212 2.1.3.1 General P-Mode parameters

- 213 ● **PMode.ID**: support required.
- 214 ● **PMode.Agreement**: support required.
- 215 ● **PMode.MEP**: support required for: <http://www.oasis-open.org/committees/ebxml-msg/one-way>
- 216 ● **PMode.MEPbinding**: support required for: [http://www.oasis-open.org/committees/ebxml-](http://www.oasis-open.org/committees/ebxml-msg/push)
217 [msg/push](http://www.oasis-open.org/committees/ebxml-msg/push) and <http://www.oasis-open.org/committees/ebxml-msg/pull>.

- 218 ● **PMode.Initiator.Party**: support required.
- 219 ● **PMode.Initiator.Role**: support required.
- 220 ● **PMode.Initiator.Authorization.username** and **PMode.Initiator.Authorization.password**:
221 support required for: wsse:UsernameToken.
- 222 ● **PMode.Responder.Party**: support required.
- 223 ● **PMode.Responder.Role**: support required.
- 224 ● **PMode.Responder.Authorization.username** and
225 **PMode.Responder.Authorization.password**: support required for: wsse:UsernameToken.

226 2.1.3.2 PMode[1].Protocol

- 227 ● **PMode[1].Protocol.Address**: support required for “http” protocol.
- 228 ● **PMode[1].Protocol.SOAPVersion**: support required for SOAP 1.2.

229 2.1.3.3 PMode[1].BusinessInfo

- 230 ● **PMode[1].BusinessInfo.Service**: support required.
- 231 ● **PMode[1].BusinessInfo.Action**: support required.
- 232 ● **PMode[1].BusinessInfo.Properties[]**: support required.
- 233 ● **(PMode[1].BusinessInfo.PayloadProfile[])**: support not required)
- 234 ● **(PMode[1].BusinessInfo.PayloadProfile.maxSize)**: support not required)

235 2.1.3.4 PMode[1].ErrorHandling

- 236 ● **(PMode[1].ErrorHandling.Report.SenderErrorsTo)**: support not required)
- 237 ● **PMode[1].ErrorHandling.Report.ReceiverErrorsTo**: support required (for address of the MSH
238 sending the message in error or for third-party).
- 239 ● **PMode[1].ErrorHandling.Report.AsResponse**: support required (true/false).
- 240 ● **(PMode[1].ErrorHandling.Report.ProcessErrorNotifyConsumer)** support not required)
- 241 ● **PMode[1].ErrorHandling.Report.ProcessErrorNotifyProducer**: support required (true/false)
- 242 ● **PMode[1].ErrorHandling.Report.DeliveryFailuresNotifyProducer**: support required (true/false)

243 2.1.3.5 PMode[1].Reliability

244 Support not required.

245 **2.1.3.6 PMode[1].Security**

- 246 ● **PMode[1].Security.WSSVersion:** support required for: 1.1
- 247 ● **PMode[1].Security.X509.Sign:** support required.
- 248 ● **PMode[1].Security.X509.Signature.Certificate:** support required.
- 249 ● **PMode[1].Security.X509.Signature.HashFunction:** support required.
- 250 ● **PMode[1].Security.X509.Signature.Algorithm:** support required.
- 251 ● **PMode[1].Security.X509.Encryption.Encrypt:** support required.
- 252 ● **PMode[1].Security.X509.Encryption.Certificate:** support required.
- 253 ● **PMode[1].Security.X509.Encryption.Algorithm:** support required.
- 254 ● **(PMode[1].Security.X509.Encryption.MinimumStrength:** support not required)
- 255 ● **PMode[1].Security.UsernameToken.username:** support required.
- 256 ● **PMode[1].Security.UsernameToken.password:** support required.
- 257 ● **PMode[1].Security.UsernameToken.Digest:** support required (true/false)
- 258 ● **(PMode[1].Security.UsernameToken.Nonce:** support not required)
- 259 ● **PMode[1].Security.UsernameToken.Created:** support required.
- 260 ● **PMode[1].Security.PModeAuthorize:** support required (true/false)
- 261 ● **PMode[1].Security.SendReceipt:** support required (true/false)
- 262 ● **Pmode[1].Security.SendReceipt.ReplyPattern:** support required (both “response” and
- 263 “callback”))

264 **2.2 The AS4 Light Client Conformance Profile**

265 The AS4 light Client is identified by the URI:

266 <http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/cprofiles/200809/as4lightclient>

267 (Note: this URI is only an identifier, not a document address.)

268 **2.2.1 Feature Set**

Conformance Profile: AS4-LightClient	Profile summary: <“Sending+Receiving” / “ lighthandler-rm” / Level 1 / HTTP1.1 + SOAP 1.1>
Functional Aspects	Profile Feature Set
ebMS MEP	The following Message Exchange Patterns (MEPs) MUST be supported: <ul style="list-style-type: none"> ● One-way / Push (as initiator). ● One-way / Pull (as initiator).

	<p>Regardless of which MEP is used, the sending of an eb:Receipt message MUST be supported:</p> <ul style="list-style-type: none"> ● For the One-way / Push, the “response” reply pattern MUST be supported. ● For the One-way / Pull, the “callback” pattern is the only viable option, and the User message sender MUST be ready to accept an eb:Receipt either piggybacked on a PullRequest, or sent separately. The User message receiver MUST be able to send an eb:Receipt separately from the PullRequest. <p>In all MEPs, the User message receiver MUST be able to send an eb:Receipt as a separate message (i.e. not piggybacked on a PullRequest message or on another User message). An MSH conforming to this profile is therefore NOT REQUIRED to bundle an eb:Receipt with any other ebMS header or message body. However, when receiving a Receipt, an MSH conforming to this profile MUST be able to process an eb:Receipt bundled with an other ebMS message header or body.</p> <p>Use of the ebbpsig:NonRepudiationInformation element (as defined in [ebBP-SIG]) is REQUIRED as content for the eb:Receipt message, i.e. when conforming to this profile a Sending MSH must be able to create a Receipt with such a content, and a Receiving MSH must be able to process it.</p>
Reliability	<p>Reception Awareness, defined as the ability for a Sending light Client to notify its application (message Producer) of lack of reception of an eb:Receipt related to a sent message, MUST be supported. This implies support for:</p> <ul style="list-style-type: none"> ● Correlating eb:Receipts with previously sent User messages, based on the ebMS message ID. ● Detection of a missing eb:Receipt for a sent message. ● Ability to report an error to the message Producer in case no eb:Receipt has been received for a sent message. <p>The semantics for sending back an eb:Receipt message is as follows: a well-formed ebMS user message has been received and the MSH is taking responsibility for it's processing, (additional application-level delivery semantics, and payload validation semantics are not relevant).</p> <p>Support for a WS reliable messaging specification is optional.</p>
Security	<p>Both authorization options for message pulling (authorizing a PullRequest for a particular MPC) described in the ebHandler conformance profile MUST be supported:</p> <ol style="list-style-type: none"> 1. Support for username / password token: minimal support for wss:UsernameToken profile in the Pull signal - for authorizing a particular MPC. Support for adding a WSS security header targeted to the “ebms” actor, as specified in section 7.10 of ebMS V3, with the wsse:UsernameToken profile. The use of transport-level secure protocol such as SSL or TLS is recommended. 2. Support for a regular wsse security header (XMLDsig for authentication, use of X509), and no additional wsse security header targeted to “ebms”.
Error generation and reporting	<p>Error notification to the local message producer MUST be supported (e.g. reported failure to deliver pushed messages).</p>

	The reporting of message processing errors for pulled messages to the remote party MUST be supported via Error messages (errors may be bundled with another pushed message or a Pull Request signal message.).
Message Partition Channels	Sending on the default message partition channel is sufficient (support for additional message partitions is NOT REQUIRED.)
Message packaging	Support for attachments is NOT REQUIRED – i.e. any XML message payload will use the SOAP body. Support for MessageProperties is NOT REQUIRED.
Interoperability Parameters	The following interoperability parameters values MUST be supported for this conformance profile: <ul style="list-style-type: none"> ● Transport: HTTP 1.1 ● SOAP version: 1.2 ● Reliability Specification: none. ● Security Specification: WSS 1.1.

269 2.2.2 WS-I Conformance Requirements

270 This conformance profile will require compliance with the following WS-I profile :

- 271 ● Basic Profile 2.0 (BP2.0) [WSIBP20].

272 Note: this must be interpreted as requiring that the features exhibited by an AS4 Light Client ebMS
273 conformance profile MUST comply with the above WS-I profile.

274 2.2.3 Processing Mode Parameters

275 This section contains a summary of P-Mode parameters relevant to AS4 features for this conformance
276 profile. An AS4 Light client MUST support and understand those that are mentioned as "required". For
277 each parameter, either:

- 278 ● Full support is required: An implementation is supposed to support the possible options for this
279 parameter.
- 280 ● Partial support is required: Support for a subset of values is required.
- 281 ● No support is required: An implementation is not required to support the features controlled by this
282 parameter, and therefore not required to understand this parameter.

283

284 An AS4 Light client is expected to support the P-Mode set below both as a Sender (of the user message,
285 in case of a one-way / push) and as a Receiver (in case of a one-way / pull).

286 2.2.3.1 General P-Mode parameters

- 287 ● **PMode.ID**: support required.
- 288 ● **PMode.Agreement**: support required.
- 289 ● **PMode.MEP**: support required for: <http://www.oasis-open.org/committees/ebxml-msg/one-way>
- 290 ● **PMode.MEPbinding**: support required for: [http://www.oasis-open.org/committees/ebxml-](http://www.oasis-open.org/committees/ebxml-msg/push)
291 [msg/push](http://www.oasis-open.org/committees/ebxml-msg/pull) and <http://www.oasis-open.org/committees/ebxml-msg/pull>.
- 292 ● **PMode.Initiator.Party**: support required.
- 293 ● **PMode.Initiator.Role**: support required.
- 294 ● **PMode.Initiator.Authorization.username** and **PMode.Initiator.Authorization.password**:
295 support required for: wsse:UsernameToken. (as initiator of the one-way / pull)
- 296 ● **PMode.Responder.Party**: support required.
- 297 ● **PMode.Responder.Role**: support required.
- 298 ● **PMode.Responder.Authorization.username** and
299 **PMode.Responder.Authorization.password**: support not required.

300 2.2.3.2 PMode[1].Protocol

- 301 ● **PMode[1].Protocol.Address**: support required for “http” protocol.
- 302 ● **PMode[1].Protocol.SOAPVersion**: support required for SOAP 1.2.

303 2.2.3.3 PMode[1].BusinessInfo

- 304 ● **PMode[1].BusinessInfo.Service**: support required.
- 305 ● **PMode[1].BusinessInfo.Action**: support required.
- 306 ● **PMode[1].BusinessInfo.Properties[]**: support required.
- 307 ● **(PMode[1].BusinessInfo.PayloadProfile[])**: support not required)
- 308 ● **(PMode[1].BusinessInfo.PayloadProfile.maxSize)**: support not required)

309 2.2.3.4 PMode[1].ErrorHandling

- 310 ● **(PMode[1].ErrorHandling.Report.SenderErrorsTo)**: support not required)
- 311 ● **PMode[1].ErrorHandling.Report.AsResponse**: support required (true/false) as initiator of the
312 one-way / push, as well as for the PullRequest signal (PMode[1][s]).
- 313 ● **(PMode[1].ErrorHandling.Report.ProcessErrorNotifyConsumer)** support not required)
- 314 ● **PMode[1].ErrorHandling.Report.ProcessErrorNotifyProducer**: support required (true/false)
- 315 ● **PMode[1].ErrorHandling.Report.DeliveryFailuresNotifyProducer**: support required (true/false)

316 2.2.3.5 Pmode[1].Reliability

317 Support not required.

318 2.2.3.6 PMode[1].Security

- 319 ● **PMode[1].Security.WSSVersion**: support required for: 1.1
- 320 ● **PMode[1].Security.X509.Sign**: support required.
- 321 ● **PMode[1].Security.X509.Signature.Certificate**: support required.
- 322 ● **PMode[1].Security.X509.Signature.HashFunction**: support required.
- 323 ● **PMode[1].Security.X509.Signature.Algorithm**: support required.
- 324 ● **PMode[1].Security.X509.Encryption.Encrypt**: support not required.
- 325 ● **PMode[1].Security.X509.Encryption.Certificate**: support not required.
- 326 ● **PMode[1].Security.X509.Encryption.Algorithm**: support not required.
- 327 ● **(PMode[1].Security.X509.Encryption.MinimumStrength**: support not required)
- 328 ● **PMode[1].Security.UsernameToken.username**: support required.
- 329 ● **PMode[1].Security.UsernameToken.password**: support required.
- 330 ● **PMode[1].Security.UsernameToken.Digest**: support required (true/false)
- 331 ● **(PMode[1].Security.UsernameToken.Nonce**: support not required)
- 332 ● **PMode[1].Security.UsernameToken.Created**: support required.
- 333 ● **PMode[1].Security.PModeAuthorize**: support required (true/false)
- 334 ● **PMode[1].Security.SendReceipt**: support required (true/false)
- 335 ● **Pmode[1].Security.SendReceipt.ReplyPattern**: support required for "response" if
- 336 PMode.MEPbinding is "push", and for "callback" if PMode.MEPbinding is "pull".

337 2.3 Conformance Profiles Compatibility

338 The AS4 profile is compatible with the following ebMS V3 conformance profiles, defined in [ebMS3-CP]:

- 339 ● Gateway RM V2/3
- 340 ● Gateway RM V3
- 341 ● Gateway RX V2/3
- 342 ● Gateway RX V3

343 AS4 may be deployed on any MSH that conforms to one of the above conformance profiles.

344 NOTE: AS4 may also be deployed on an MSH that supports B2B messaging protocols other than ebMS,
345 such as AS2 [RFC4130]. Such an MSH could be used by organizations that use AS2 for some business
346 partners, or for some types of documents, and AS4 for others.

3 AS4 Additional Features

347

348 This section defines features that were not specified in the ebMS V3 Core Specification and therefore out
349 of scope for the previous conformance profiles (ebHandler CP and Light Client CP). These features
350 should be considered as additional capabilities that are either required by or made optional to AS4
351 implementations as indicated below.

352 The profiling tables below can be used for adding user-defined profiling requirements to be adopted within
353 a business community. Whenever the feature, or its profiling, is mandatory, the right-side column (Profile
354 Requirement) will specify it.

3.1 Compression

355

356 Application payloads that are built in conformance with the SOAP Messages with Attachments
357 [SOAPATTACH] specification may be compressed. Support for compression MUST then be provided by
358 AS4 implementations. Compression of the SOAP envelope and/or payload containers within the SOAP
359 Body of an ebMS Message is not supported.

360

361 To compress the payload(s) of a message built in conformance with the SOAP Messages with
362 Attachments [SOAPATTACH] specification, the GZIP [RFC1952] compression algorithm MUST be used.
363 Compression MUST be applied before payloads are attached to the SOAP Message.

364 The eb:PartInfo element in the message header that relates to the compressed message part, MUST
365 have an eb:Property element with @name = "Compressed":

```
366 <eb:Property name="Compressed"/>
```

367 The content type of the compressed attachment MUST be "application/gzip".

368 These are indicators to the receiver that compression has been used on this part.

369 When compression, signature and encryption are required of the MSH, the message MUST be
370 compressed prior to being signed and/or encrypted.

371 Packaging requirements:

- 372 ● An eb:PartInfo/eb:PartProperties/eb:Property/@name="MimeType" value is RECOMMENDED to
373 identify the mimetype of the payload before compression was applied.
- 374 ● An eb:PartInfo/eb:PartProperties/eb:Property/@name="CharacterSet" value is RECOMMENDED
375 to identify the character set of the payload before compression was applied.

377 Example:

```
378 <eb:PartInfo href="cid:attachment1234@example.com" >  
379   <eb:PartProperties>  
380     <eb:Property name="MimeType">application/xml</eb:Property>  
381     <eb:Property name="CharacterSet">utf-8</eb:Property>  
382     <eb:Property name="Compressed"/>  
383   </eb:PartProperties>  
384 </eb:PartInfo>
```

385

386 An additional P-Mode parameter is defined, that MUST be supported:

- 387 ● **PMode[1].PayloadService.Compression:** {true / false}

388 **True:** some attached payload(s) may be compressed over this MEP segment.

389 **False** (default): no compression is used over this MEP segment.

390 NOTE: the requirement for Compression feature applies to both conformance profiles (AS4 ebHandler
391 and AS4 light Client).

392 **3.2 Reception Awareness features and Duplicate Detection**

393 These capabilities make use of the eb:Receipt as the sole type of acknowledgement. Duplicate detection
394 only relies on the eb:MessageInfo/eb:MessageId.

Features	Profile requirements
Reception awareness error handling (REQUIRED support)	Ability for the MSH expecting an eb:Receipt to generate an error in case no eb:Receipt has been received for a sent message. It is RECOMMENDED that this error be a new error: Code = EBMS:0301, Short Description = MissingReceipt, Severity = Failure, Category = Communication. Ability for the MSH expecting an eb:Receipt to report a MissingReceipt error to the message Producer
Message Retry (OPTIONAL support)	Ability for a User message sender that has not received an expected eb:Receipt to resend the User message. If doing so, the eb:MessageInfo/eb:MessageId element of the resend message and of the original User message MUST be same. When resending a message for which non-repudiation of receipt is required, the sender MUST ensure that the hash values for the digests to be included in the Receipt (i.e. the content of MessagePartNRInformation elements), do not vary from the original message to the retry(ies), so that non-repudiation of receipt can be asserted based on the original message and the receipt of any of its retries.
Duplicate Detection (REQUIRED support)	Ability for the MSH receiving a User message to detect and/or eliminate duplicates based on eb:MessageInfo/eb:MessageId. If duplicates are just detected (not eliminated) then at the very least it is REQUIRED that the Receiving MSH notifies its application (message Consumer) of the duplicates. For examples, these could be logged. Related quantitative parameters (time window for the detection, or maximum message log size) are left to the implementation.

395 NOTE: these requirements apply to both conformance profiles (AS4 ebHandler and AS4 light Client)

396 The following additional P-Mode parameters are defined and MUST be supported:

- 397 • **PMode[1].ReceptionAwareness:** (true / false) Note: when set to true, the
398 **PMode[1].Security.SendReceipt** must also be set to true.
- 399 • **PMode[1].ReceptionAwareness.Replay:** (true / false)
- 400 • **PMode[1].ReceptionAwareness.Replay.Parameters:** (contains a composite string specifying:
401 (a) maximum number of retries or some timeout, (b) frequency of retries or some retry rule). The

402 string contains a sequence of parameters of the form: name=value, separated by either comas or
403 ';'. Example: "maxretries=10,period=3000", in case the retry period is 3000 ms.

404 • **PMODE[1].ReceptionAwareness.DuplicateDetection:** (true / false)

405 • **PMODE[1].ReceptionAwareness.DetectDuplicates.Parameters:** (contains an implementation
406 specific composite string. As an example this string may specify either (a) maximum size of
407 message log over which duplicate detection is supported, (b) maximum time window over which
408 duplicate detection is supported). The string contains a sequence of parameters of the form:
409 name=value, separated by either comas or ';'. Example: "maxsize=10Mb,checkwindow=7D", in
410 case the duplicate check window is guaranteed of 7 days minimum.

411 3.3 Alternative Pull Authorization

412 In addition to the two authorization options described in the AS4 Conformance Profile (section 2.1.1), an
413 implementation MAY optionally decide to support a third authorization technique, based on transient
414 security (SSL or TLS).

415 SSL/TLS can provide certificate-based client authentication. Once the identity of the Pulling client is
416 established, the Security module may pass this identity to the ebms module, which can then associate it
417 with the right authorization entry, e.g. the set of MPCs this client is allowed to pull from.

418 This third authorization option, compatible with AS4 although not specified in ebMS Core V3, relies on the
419 ability of the ebms module to obtain the client credentials. This capability represents an (optional) new
420 feature. When using this option for authorizing pulling, there is no need to insert any WS-Security header
421 in the Pull request at all.

422 3.4 Semantics of Receipt in AS4

423 The notion of Receipt in ebMS V3 is not associated with any particular semantics, such as delivery
424 assurance. However, when combined with security (signing), it is intended to support Non Repudiation of
425 Receipt (NRR).

426 In AS4, the eb:Receipt message serves both as a business receipt (its content is profiled in Section 2),
427 and as a reception indicator, being a key element of the reception awareness feature. No particular
428 delivery semantics can be assumed however: the sending of an eb:Receipt only means the following,
429 from a message processing viewpoint:

430 (a) The related ebMS user message has been received and is well-formed.

431 (b) The Receiving MSH is taking responsibility for processing this user message. However, no
432 guarantee can be made that this user message will be ultimately delivered to its Consumer
433 application (this responsibility lays however now on the Receiver side).

434 The meaning of NOT getting an expected Receipt, for the sender of a related user message, is one of the
435 following:

436 1. The user message was lost and never received by the Receiving MSH.

437 2. The user message was received, but the eb:Receipt was never generated, e.g. due to a faulty
438 configuration (P-Mode).

439 3. The user message was received, the eb:Receipt was sent back but was lost on the way.

440 See section 5.1.8 for AS4 usage rules about Receipts.

441 Note: The use of the phrase 'business receipt' in AS4 is to distinguish the nature of the AS4/ebMS3
442 receipt as being sufficient for Non-Repudiation of Receipt (NRR). In this sense it is very similar to the
443 Message Disposition Notification (MDN, [RFC3798]) response that is used by AS2 as a business receipt

444 for non-repudiation. This receipt in AS4/ebMS3 contains the same information as the MDN, and thus
445 distinguishes itself from the web services reliable messaging (sequence) acknowledgment.

4 Complementary Requirements for the AS4 Multi-Hop Profile

446
447

448 The ebMS 3.0 Part 2, Advanced Features specification [ebMS3ADV] defines several advanced messaging
449 features. One of these is a multi-hop feature that provides functionality to exchange ebMS messages
450 through clouds of intermediaries, or *I-Clouds*. These intermediaries serve various purposes, including
451 message routing and store-and-forward (or store-and-collect) connections. Intermediaries allow messages
452 to flow through a *multi-hop* path and serve to interconnect (private or public) networks and clouds. This
453 section specifies an optional profile for AS4 endpoints in order to converse with ebMS 3.0 intermediaries.
454 This profile is complementary to the primary profiles defined in section 2 . This complementary profile:

- 455 ● Simplifies the fine-grained endpoint configuration options of [ebMS3ADV] to a single processing
456 mode parameter (section 4.3).
- 457 ● Extends the capability of AS4 endpoints to exchange messages in a peer-to-peer fashion to
458 exchanges across intermediaries (section 4.4).

459 Section 4.1 is non-normative and provides the rationale and context for using AS4 and intermediaries.
460 Section 4.2 defines some general constraints and assumptions. Section 4.3 presents the single additional
461 processing mode parameter required for multi-hop. Section 4.4 provides a minimal interoperability subset
462 for AS4 endpoints in an *I-Cloud*.

4.1 Rationale and Context


463

464 A key motivation for AS4 is to provide a simplified profile of ebMS 3.0 that allows Small and Medium-Size
465 Enterprises (SMEs) to exchange messages using Web Services. Two situations can be distinguished:

- 466 ● Situations where one partner in an exchange is an SME and the other is a larger organization.
467 AS4 allows SME trading partners of a large organization to operate “client-only” endpoints and pull
468 messages from a B2B gateway server operated by the large organization. That B2B gateway
469 operates as a server and is addressable and available for pulling. These exchanges can be said
470 to be *asymmetric*.
- 471 ● Situations where all partners are SMEs, organized in collaborative SME B2B networks. In these
472 situations there is no single larger partner that the other partners are organized around. These
473 exchanges can be said to be *symmetric*.

474 When two endpoints exchange messages directly, they cannot both be client-only endpoints. Inter-
475 mediaries can serve SME networks by offering store-and-collect capabilities, just like Internet Service
476 Providers (ISPs) offer mailbox services for email, Value-Added Network (VAN) services offer document
477 exchange services, and Cloud-based File Storage services offer secure temporary storage and exchange
478 of large files.

479

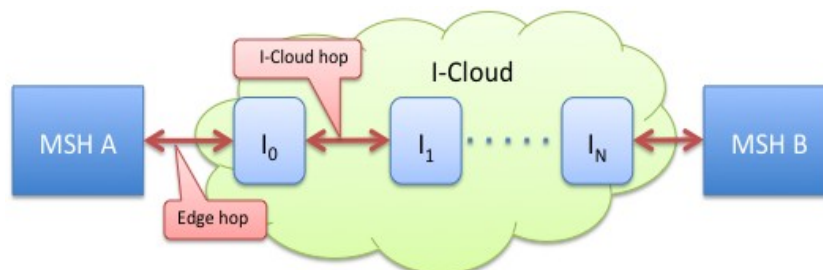

481 In the diagram, messages can be sent any time to MSH A or MSH B as long as the I-Cloud is able to
482 forward messages to AS4 edge intermediaries I_0 and I_N , from which they can be pulled at a convenient
483 time.

484 4.2 General Constraints

485 This profile defines the following general constraints:

- 486 ● Whether or not two AS4 endpoint exchange user messages in a peer-to-peer fashion or across
487 an I-Cloud is determined by a single processing mode parameter.
- 488 ● Sender and Receiver MSH can diverge in some “init” and “resp” parameters (terminology from
489 section 2.7.2 of [ebMS3ADV]), as some parameters in an exchange relate to the edge
490 intermediaries, not to the ultimate destination MSH.
- 491 ● Whether or not an AS4 endpoint returns related response signals (receipts, errors) in a peer-to-
492 peer fashion or across an I-Cloud is not based on configuration, but is determined by how the
493 associated user message was delivered:
 - 494 ○ Receipts and errors for user messages received directly are sent back directly.
 - 495 ○ Receipts and errors for user messages received through an I-Cloud are sent back through the
496 I-Cloud.
- 497 ● Edge intermediaries connect to AS4 endpoints as servers: they do not pull messages from
498 endpoints.
- 499 ● Pull signals from AS4 endpoints target AS4 edge intermediaries and are not forwarded across an
500 I-Cloud.
- 501 ● An AS4 edge intermediary that is capable of delivering a particular user message to an AS4
502 endpoint SHOULD be configured to provide initial reverse routing of any related signals (receipts,
503 errors).
- 504 ● There is no requirement to support WS-ReliableMessaging lifecycle messages.

505 4.3 Processing Mode Parameter

506 In this profile, AS4 processors either operate in peer-to-peer exchange mode or exchange messages
507 across intermediaries based on the value of a single processing mode parameter, defined in section 6.4.2
508 of [ebMS3ADV]: **Pmode[1].Protocol.AddActorOrRoleAttribute**.

- 509 ● If this value is set to *true* for a P-Mode, the ebMS header in AS4 user messages MUST have a
510 SOAP 1.2 `role` attribute and its value MUST be set to the fixed value [http://docs.oasis-
511 open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh](http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh).
- 512 ● For AS4, the default value of this parameter is *false*, meaning that the SOAP 1.2 `role` attribute is
513 not present. In SOAP 1.2, this is equivalent to the attribute being present with the value
514 <http://www.w3.org/2003/05/soap-envelope/role/ultimateReceiver>.

515 4.4 AS4 Endpoint Requirements

516 The ebMS 3.0 multi-hop feature specifies requirements on endpoints to be able to exchange messages in
517 an I-Cloud. This section further constrains these requirements and provides a minimal interoperability
518 subset for AS4 endpoints. The structure of this section follows the structure of section 2.6 of [ebMS3ADV],
519 which considers initiating messages and responding messages.

520 The section distinguishes three types of initiating messages:

- 521 ● User Messages. No special processing is required of an AS4 processor, other than being able to
522 insert the `role` attribute with the appropriate value, subject to the selected processing mode, as
523 specified in section 4.3
- 524 ● ebMS Signal Messages. This AS4 profile constrains this further as follows:
 - 525 ○ No `RoutingInput` reference parameter and no `role` attribute are added to
526 `PullRequest` messages.
 - 527 ○ AS4 endpoints MUST NOT send initiating error messages.
- 528 ● Non-ebMS Messages: this situation is not relevant in the case of AS4 as it does not require
529 support for Web Services protocols like WS-ReliableMessaging [WSRM12]. For this reason there
530 is no need to support initiating non-ebMS messages.

531 Section 2.6 of [ebMS3ADV] distinguishes the following type of responding messages:

- 532 ● ebMS response User Messages. This is handled in the same way as ebMS request User
533 Messages.
- 534 ● ebMS Signal Messages. These messages are making use of WS-Addressing headers
535 [WSADDRCORE] under certain conditions. This profile restricts or relaxes further the use of
536 and/or support for these “wsa” headers.
 - 537 ○ AS4 endpoints are NOT REQUIRED to support `wsa:ReplyTo` header or `wsa:FaultTo`
538 when generating responses.
 - 539 ○ If the user message that the signal relates to DOES NOT contain a `role` attribute with a
540 value of <http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh>,
541 processing of signals is as specified in the ebMS 3.0 Core Specification and in the other
542 chapters of this specification.
 - 543 ○ If the user message that the signal relates to DOES contain a `role` attribute with a value of
544 <http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh>, a response
545 signal MUST contain
 - 546 ○ a `wsa:To` header element with value [http://docs.oasis-open.org/ebxml-
msg/ebms/v3.0/ns/part2/200811/icloud](http://docs.oasis-open.org/ebxml-
547 msg/ebms/v3.0/ns/part2/200811/icloud)
 - 548 ○ a `wsa:Action` header element with value [http://docs.oasis-open.org/ebxml-
msg/ebms/v3.0/ns/core/200704/oneWay.receipt](http://docs.oasis-open.org/ebxml-
549 msg/ebms/v3.0/ns/core/200704/oneWay.receipt) or [http://docs.oasis-open.org/ebxml-
msg/ebms/v3.0/ns/core/200704/oneWay.error](http://docs.oasis-open.org/ebxml-
550 msg/ebms/v3.0/ns/core/200704/oneWay.error)
 - 551 ○ and a WS-Addressing reference parameter with content as specified in the subsection
552 “Inferred `RoutingInput` for the reverse path” of section 2.6.2 of [ebMS3ADV]. The value of
553 the MPC attribute is to be set based on the value of the MPC attribute in the user
554 message. If that value is not set, the default value [http://docs.oasis-open.org/ebxml-
msg/ebms/v3.0/ns/core/200704/defaultMPC](http://docs.oasis-open.org/ebxml-
555 msg/ebms/v3.0/ns/core/200704/defaultMPC) is assumed (as defined in section 3.4.1 in
556 [ebMS3CORE]):
 - 557 ■ The MPC value for an AS4 receipt signal is formed by concatenating the string
558 “.receipt” to the (default) MPC value of the received message.
 - 559 ■ The MPC value for an AS4 error signal is formed by concatenating the string
560 “.error” to the (default) MPC value of the message in error.
 - 561 ● Non-ebMS Messages: this situation is not relevant in the case of AS4, because AS4 does not
562 require support for Web Services protocols that return signal messages, such as reliable
563 messaging acknowledgments.

5 AS4 Usage Profile of ebMS 3.0 Core Specification

564

565 While the previous sections were describing messaging handler requirements for AS4 compliance (i.e.
566 mostly intended for product developers), this section is about configuration and usage options.

567 This section is split in two major subsections:

- 568 • **AS4 Usage Rules:** this section provides the rules for using messaging features in an AS4-
569 compliant way.
- 570 • **AS4 Usage Agreements:** this section provides notes to the users on the main options left open
571 by the AS4 profiles, that have to be agreed on in order to interoperate.

572 Both sections are about features that are under responsibility of the user when using an AS4-compliant
573 product.

5.1 AS4 Usage Rules

574

5.1.1 Core Components / Modules to be Used

575

576 This table summarizes which functional modules in the ebMS V3 specification are required to be
577 implemented by the AS4 profile, and whether or not these modules are actually profiled for AS4.

578

ebMS V3 Component Name and Reference	Profiling status
Messaging Model (section 2)	Usage: Required Profiled: Yes Notes: This Profile only supports the One-Way/Push MEP (Sync and Async) and the One-Way/Pull MEP
Message Pulling and Partitioning (section 3)	Usage: Required Profiled: No Notes: The profiling of QoS associated with Pulling is defined in another module. The MPC and pulling feature itself are not profiled.
Processing Modes (section 4)	Usage: Required Profiled: Yes
Message Packaging (section 5)	Usage: Required Profiled: Yes Notes: Default business process defines acceptable defaults for Role, Service and Action. Bundling options for message headers (piggybacking) are restricted.

ebMS V3 Component Name and Reference	Profiling status
Error Handling (section 6)	Usage: Required Profiled: Yes Notes: Addition of some new Error Codes regarding Reception Awareness
Security Module (section 7)	Usage: Required Profiled: Yes Notes: Guidance regarding which part(s) of the message may be encrypted and included in the signature. Further guidance on how to secure the PullRequest Signal and the preventing of replay attacks..
Reliable Messaging Module (section 8)	Usage: Not Required Profiled: No Notes: This profile does not require the use of the Reliable Messaging Module using either WS-ReliableMessaging or WS-Reliability. It relies instead on eb:Receipts for supporting a light reliability feature called "Reception Awareness".

579

5.1.2 Bundling rules

Scope of the Profile Feature	Defines bundling (or "piggybacking") rules of ebMS MEPs, including Receipts.
Specification Feature	
Specification Reference	ebMS v3.0, Section 2.2
Profiling Rule (a)	<p>This profile supports the One-Way/Push MEP.</p> <p>Both synchronous and asynchronous transport channels for the response (eb:Receipt) are allowed by this profile.</p> <p>When sending a Receipt for this MEP, a Receiving MSH conforming to this profile SHOULD NOT bundle the Receipt with any other ebMS message header or body.</p>
Profiling Rule (b)	<p>This profile supports the One-Way/Pull MEP. When sending a Receipt for this MEP, a Receiving MSH conforming to this profile SHOULD NOT bundle the Receipt with any other ebMS message header (including a PullRequest signal) or message body,</p>
Test References	

580

581 **5.1.3 Security Element**

Specification Feature	Use of WSS features
Specification Reference	ebMS v3.0, Section 7.1
Profiling Rule (a)	When using digital signatures or encryption, an AS4 MSH implementation is REQUIRED to use the Web Services Security X.509 Certificate Token Profile [WSS11-X509].
Alignment	<ul style="list-style-type: none"> • <i>Web Services Security: SOAP Message Security 1.1</i>, 2005. [WSS11] • <i>Web Services Security X.509 Certificate Token Profile 1.1</i>, 2006 [WSS11-X509].
Test References	
Notes	

582 **5.1.4 Signing Messages**

Specification Feature	Digital Signatures for SOAP message headers and body
Specification Reference	ebMS v3.0, Section 7.2
Profiling Rule (a)	AS4 MSH implementations are REQUIRED to use Detached Signatures as defined by the XML Signature Specification [XMLDSIG] when signing AS4 user or signal messages. Enveloped Signatures as defined by [XMLDSIG] are not supported by or authorized in this profile.
Profiling Rule (b)	AS4 MSH implementations are REQUIRED to include the entire eb:Messaging SOAP header block and the (possibly empty) SOAP Body in the signature. The eb:Messaging header SHOULD be referenced using the "id" attribute.
Alignment	
Test References	

583 **5.1.5 Signing SOAP with Attachments Messages**

Specification Feature	Signing attachments
Specification Reference	ebMS v3.0, Section 7.3
Profiling Rule (a)	AS4 MSH implementations are REQUIRED to use the Attachment-Content-Only transform when building application payloads using SOAP with Attachments [SOAPATTACH]. The Attachment-Complete transform is not supported by this profile.
Profiling Rule (b)	AS4 MSH implementations are REQUIRED to include the entire eb:Messaging header block and all MIME body parts of included payloads in the signature.

Alignment	
Test References	

584 5.1.6 Encrypting Messages

Specification Feature	Encrypting messages
Specification Reference	ebMS v3.0, Section 7.4
Profiling Rule (a)	If an AS4 user message is to be encrypted, AS4 MSH implementations MUST encrypt ALL payload parts. However, AS4 MSH implementations SHALL NOT encrypt the eb:Messaging header. If confidentiality of data in the eb:Messaging header is required, implementations SHOULD use transport level security.
Profiling Rule (b)	If an AS4 user message is to be encrypted and the user-specified payload data is to be packaged in the SOAP Body, AS4 MSH implementations are REQUIRED to encrypt the SOAP Body.
Alignment	
Test References	

585 5.1.7 Encrypting SOAP with Attachments Messages

Specification Feature	Encryption of message attachments.
Specification Reference	ebMS v3.0, Section 7.5
Profiling Rule (a)	If an AS4 user message is to be encrypted and the user-specified payload data is to be packaged in conformance with the [SOAPATTACH] specification, AS4 MSH implementations are REQUIRED to encrypt the MIME Body parts of included payloads.
Alignment	
Test References	
Notes	

586 5.1.8 Generating Receipts

Specification Feature	eb:Receipt signal messages
Specification Reference	ebMS v3.0, Section 7.12..2 (Persistent Signed Receipt) ebMS v3.0, Section 5.2.3.3, eb:Messaging/eb:SignalMessage/eb:Receipt
Profiling Rule (a): Receipts for reception awareness	In AS4, the content of the eb:Receipt element MUST be a valid ebbpsig:NonRepudiationInformation element. When a Receipt is to be used solely as a reception indicator (for reception awareness), the sender of the Receipt MUST use ebbp:MessagePartIdentifier elements in the ebbpsig:NonRepudiationInformation instead of ds:Reference elements to reference message parts. The eb:Receipt

	<ul style="list-style-type: none"> • MUST contain an ebbp:MessagePartIdentifier element for each eb:PartInfo. The content of each of these elements MUST be identical to the value of the “href” attribute in the corresponding eb:PartInfo element. • SHOULD include an ebbp:MessagePartIdentifier element that identifies the MIME part in the received message that contains the AS4 SOAP envelope. Its content MUST be an MIME Content-Id Uniform Resource Locator that matches the “start” parameter of the received SOAP-with-attachments message. The element is REQUIRED in receipts for user messages that have no eb:PartInfo elements, as the cardinality of the ebbp:MessagePartIdentifier in the ebbp:NonRepudiationInformation schema definition is non-zero. <p>The eb:RefToMessageId in the eb:MessageInfo group in the eb:SignalMessage contains the message identifier of the received message.</p>
<p>Profiling Rule (b): Receipts for Non Repudiation of Receipt (NRR)</p>	<p>In AS4, the content of the eb:Receipt element MUST be a valid ebbpsig:NonRepudiationInformation element. When a Receipt is to be used for Non Repudiation of Receipt (NRR), the sender of the Receipt:</p> <ul style="list-style-type: none"> • MUST use ds:Reference elements containing digests of the original message parts for which NRR is required. Message parts MUST NOT be identified using ebbp:MessagePartIdentifier elements. • MUST sign the AS4 receipt Signal Message. <p>When signed receipts are requested in AS4 that make use of default conventions, the Sending message handler (i.e. the MSH sending messages for which signed receipts are expected) MUST identify message parts (referenced in eb:PartInfo elements in the received User Message) and MUST sign the SOAP body and all attachments using the http://docs.oasis-open.org/wss/oasis-wss-SwAProfile-1.1#Attachment-Content-Signature-Transform . The Receiving message handler (i.e. the MSH generating receipt signal) can reuse the ds:Reference elements from the SignedInfo reference list in the received message.</p> <p>Note that the Sending message handler MUST NOT encrypt any signed content before signing (Section 7.6 in ebMS V3). If using compression in an attachment, the Sending message handler MUST sign the data after compression (see section 3.1). Variations from default conventions can be agreed to bilaterally, but conforming implementations are only required to provide receipts using the default conventions described in this section.</p>
<p>Profiling Rule (c)</p>	<p>An AS4 message that has been digitally signed MUST be acknowledged with a message containing an eb:Receipt signal that itself is digitally signed. The eb:Receipt MUST contain the information necessary to provide non-repudiation of receipt of the original message, as described in profiling rule (b).</p> <p>NOTE: the digest(s) to be inserted in the ebbp:MessagePartNRInformation element(s) or the Receipt, related to the original message parts for which a receipt is required, may be obtained from the signature information of the original message (ds:SignedInfo element), as only those parts that have been signed are subject to NRR. This means a Receiving message handler may not have to compute digests outside its security module.</p>
<p>Alignment</p>	

Test References	
-----------------	--

587 5.1.9 MIME Header and Filename information

Specification Feature	Optional presence of a "filename" value in "Content-disposition" header on MIME body parts.
Specification Reference	MIME specification (IETF) [RFC2045]
Profiling Rule (a)	The "Content-disposition" header on MIME body parts, when used, MUST carry file name information. Implementations MUST support the setting (when sending) and reading (when receiving) of "Content-disposition" header,
Profiling Rule (b)	When end users wish to supply file names and have that information confidential, they SHOULD use TLS/SSL based encryption.
Alignment	
Test References	

588 5.2 AS4 Usage Agreements

589 This section defines the operational aspect of the profile configuration aspects that users have to agree
590 on, mode of operation, etc to interoperate. This section is not normative and is provided here only as
591 guidance for users.

592 All the user agreement options related to a specific type of message exchange instance (e.g. related to a
593 specific type of business transaction) are controlled by the Processing Mode (P-Mode) parameters
594 defined in the ebMS Core V3 specification. This section only lists the parameters that are particularly
595 relevant to AS4.

596 5.2.1 Controlling Content and Sending of Receipts

Scope of the Profile Feature	Choose among options in sending Receipts.
Specification Feature	
Specification Reference	ebMS v3.0, Section 2.2
Usage Profiling (a)	<p>Must eb:Receipts be used for non-repudiation of receipt (NRR), or just act as reception awareness feature? For non-repudiation, the eb:Receipt element must contain a well-formed ebbp:NonRepudiationInformation element. This is indicated by the new P-Mode parameter:</p> <ul style="list-style-type: none"> • PMode[1].Security.SendReceipt.NonRepudiation : value = 'true' (to be used for non-repudiation of receipt), value = 'false' (to be used simply for reception awareness).
Usage Profiling (b)	<p>Receipts for One-Way/Push MEP:</p> <p>Both synchronous and asynchronous transport channels for the response</p>

	<p>(eb:Receipt) are allowed by this profile. and Callback)</p> <p>This option is controlled by the P-Mode parameter:</p> <ul style="list-style-type: none"> • PMode[1].Security.SendReceipt.ReplyPattern: value = 'Response' (sending receipts on the HTTP response or back-channel). • PMode[1].Security.SendReceipt.ReplyPattern: value = 'Callback' (sending receipts using a separate connection.)
Usage Profiling (c)	<p>Receipts for the One-Way/Pull MEP:</p> <ul style="list-style-type: none"> • Pmode[1].Security.SendReceipt.ReplyPattern: value = 'Callback' (sending receipts using a separate connection, and not bundled with PullRequest.)
Test References	
Notes	

597 **5.2.2 Error Handling Options**

Specification Feature	Error Handling options
Specification Reference	
Usage Profiling (a): Receiver-side error	<p>All Receiver-side error reporting options are left for users to agree on, including the choice to not report at all:</p> <ul style="list-style-type: none"> • PMode[1].ErrorHandling.Report.ReceiverErrorsTo: recommendation is to report such Receiver-side errors to the Sender. Otherwise: report URI that is different from sender URI? • PMode[1].ErrorHandling.Report.AsResponse: recommendation for one-way messages (except when pulling is in use) is value="true": report errors on the back-channel of erroneous messages. Errors for pulled messages can only be reported on a separate connection. • PMode[1].ErrorHandling.Report.ProcessErrorNotifyConsumer: (true / false) for controlling escalating the error to the application layer.
Usage Profiling (b): Reception Awareness errors	<p>What is the behavior of a Sender that failed to receive a Receipt (even after message retries)?</p> <p>(a) No error reporting (in case no reception awareness required).</p> <p>(b) Error reporting from the Sender MSH to its message Producer (application-level notification). Error type: EBMS:0301: MissingReceipt (see Section 3.2 in Additional Features.)</p> <p>P-Mode parameter:</p> <ul style="list-style-type: none"> • PMode[1].ErrorHandling.Report.MissingReceiptNotifyProducer: (new) true if (b), false if (a) • PMode[1].ErrorHandling.Report.SenderErrorsTo: (in case an error should be sent about such failures – e.g. to a third party if not to the

	original Receiver of the non-acknowledged user message.)
Usage Profiling (c): Error about Receipts	How are errors about Receipt messages reported? P-Mode parameters: <ul style="list-style-type: none"> • PMode[1].ErrorHandling.Report.SenderErrorsTo: reporting URI that is different from Receiver URI? • PMode[1].ErrorHandling.Report.AsResponse: (true / false) NOTE: In case of Receipts already sent over the HTTP back-channel, can only be “false” meaning such errors will be sent over separate connection. • PMode[1].ErrorHandling.Report.ProcessErrorNotifyProducer: (true / false) for controlling escalating the error to the application layer.
Alignment	
Test References	
Notes	

598

5.2.3 Securing the PullRequest

Specification Feature	Pulling authorization options
Specification Reference	ebMS v3.0, Section 7.11.x AS4 Conformance Profile authorization options (section 2.1.1)
Usage Profiling (a)	<p>An AS4 Sending MSH MAY authenticate a Receiving MSH that sends a PullRequest in two ways:</p> <p>(a) (Option 1 in 2.1.1) Use of the WSS security header targeted to the “ebms” actor, as specified in section 7.10 of ebMS V3, with the wsse:UsernameToken profile.</p> <p>(b) (Option 2 in 2.1.1) by using [WSS11-X509] coupled with the Message Partition Channel that a Pull signal is accessing for pulling messages.</p> <p>P-Mode parameters:</p> <ul style="list-style-type: none"> • PMode.Initiator.Authorization: must be set to true (the initiator of a Pull request must be authorized). • PMode.Initiator.Authorization.username: (for option (a)) • PMode.Initiator.Authorization.password: (for option (a)) • PMode[1].Security.PModeAuthorize: must be set to true in the PMode leg describing the transfer of a pulled message. • PMode[1].Security.X509.sign: (for option (b)) • PMode[1].Security.X509.SignatureCertificate: (for option (b)) <p>NOTE: in (b), the P-Mode parameters about X509 are controlling both the authentication of PullRequest signals and authentication of other User Messages.</p>

Usage Profiling (b)	<p>PullRequest signals: are they sent using the HTTPS transport protocol with optional Client-side Authentication?</p> <p>P-Mode parameter:</p> <ul style="list-style-type: none"> • PMode[1].Protocol.Address: The URL scheme will indicate whether HTTPS is used or not.
Alignment	
Test References	
Notes	

599

5.2.4 Reception Awareness Parameters

Specification Feature	Message Replay and Duplicate Detection options
Specification Reference	<p>N/A</p> <p>AS4 Profile: additional features (section 3)</p>
Usage Profiling (a): Sender options	<p>In case Reception Awareness is used: what is the behavior of a Sender that did not receive a Receipt?</p> <p>(c) No message replay.</p> <p>(d) Resend the message. Replay parameters: to agree on: (1) retry number, (2) retry frequency.</p> <p>P-Mode parameters (additional to those defined in ebMS Core V3):</p> <ul style="list-style-type: none"> • PMode[1].ReceptionAwareness: (true / false) • PMode[1].ReceptionAwareness.Replay: (true / false) • PMode[1].ReceptionAwareness.Replay.Parameters: (contains a composite string specifying: (a) maximum number of retries or some timeout, (b) frequency of retries or some retry rule.
Usage Profiling (b): Receiver options	<p>Is duplicate detection enabled?</p> <p>(a) No. duplicates are not detected.</p> <p>(b) In addition to (a), a receiver detects and eliminates duplicates based on eb:MessageInfo/eb:MessageId.</p> <p>P-Mode parameters (additional to those defined in ebMS Core V3):</p> <ul style="list-style-type: none"> • PMode[1].ReceptionAwareness.DuplicateDetection: (true / false) • PMode[1].ReceptionAwareness.DuplicateDetection.Parameters
Others	
Notes	

5.2.5 Default Values of Some P-Mode Parameters

Specification Feature	Default values and authorized values for main P-Mode parameters.
Specification Reference	ebMS 3.0, Appendix D.3
Usage Profiling (a)	PMODE.MEP parameter will be constrained to the following value: http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/oneWay
Usage Profiling (b)	PMODE.MEPbinding parameter will be constrained to the following values: http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/push http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/pull
Usage Profiling (c)	PMODE.Initiator.Role parameter will have the following default value: http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/initiator
Usage Profiling (d)	PMODE.Responder.Role parameter will have the following default value: http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/responder
Usage Profiling (e)	PMODE[1].BusinessInfo.Service parameter will have the following default value: http://docs.oasis-open.org/ebxml-msg/as4/200902/service <i>NOTE: this default is to be considered a P-Mode content default: absence of the P-Mode itself will cause the default value defined in the ebMS V3 Core specification (section 4.3) to apply. This value is usually enforced by the MSH implementation itself.</i>
Usage Profiling (f)	PMODE[1].BusinessInfo.Action parameter will have the following default value: http://docs.oasis-open.org/ebxml-msg/as4/200902/action <i>NOTE: this default is to be considered a P-Mode content default: absence of the P-Mode itself will cause the default value defined in the ebMS V3 Core specification (section 4.3) to apply. This value is usually enforced by the MSH implementation itself</i>
Usage Profiling (g)	PMODE[1].Reliability parameters are not supported by this profile
Alignment	
Test References	
Notes	

5.2.6 HTTP Confidentiality and Security

Specification Feature	HTTP Security Management and Options This table is intended as a guide for users, to specify their own agreements on HTTP confidentiality and security.
-----------------------	--

Specification Reference	ebMS 3, Section 7, Appendix D.3.6.
Usage Profiling (a)	Is HTTP transport-layer encryption required? What protocol version(s)?
Usage Profiling (b)	What encryption algorithm(s) and minimum key lengths are required?
Usage Profiling (c)	What Certificate Authorities are acceptable for server certificate authentication?
Usage Profiling (d)	Are direct-trust (self-signed) server certificates allowed?
Usage Profiling (e)	Is client-side certificate-based authentication allowed or required?
Usage Profiling (f)	What client Certificate Authorities are acceptable?
Usage Profiling (g)	What certificate verification policies and procedures must be followed?
Alignment	
Test References	
Notes	

602 5.2.7 Deployment and Processing requirements for CPAs

Usage Profile Feature	CPA Access
Usage Profiling (a)	Is a specific registry for storing CPAs required? If so, provide details.
Usage Profiling (b)	Is there a set of predefined CPA templates that can be used to create given Parties' CPAs?
Usage Profiling (c)	Is there a particular format for file names of CPAs, in case that file name is different from CPAId value?
Others	

603 5.2.8 Message Payload and Flow Profile

Usage Profile Feature	Message Quantitative Aspects
Usage Profiling (a)	What are typical and maximum message payload sizes that must be handled? (maximum, average)
Usage Profiling (b)	What are typical communication bandwidth and processing capabilities of an MSH for these Services?
Usage Profiling (c)	Expected Volume of Message flow (throughput): maximum (peak), average?
Usage Profiling (d)	How many Payload Containers must be present?
Usage Profiling (e)	What is the structure and content of each container? [List MIME Content-Types and other process-specific requirements.] Are there restrictions on the MIME types allowed for attachments?

Usage Profiling (f)	How is each container distinguished from the others? [By a fixed ordering of containers, a fixed Manifest ordering, or specific Content-ID values.]. Any expected relative order of attachments of various types?
Usage Profiling (g)	Is there an agreement that message part filenames must be present in MIME Content-Disposition parameter ?
Others	

604

5.2.9 Additional Deployment or Operational Requirements

Usage Profile Feature	Operational or Deployment Conditions
Usage Profiling (a)	Operational or deployment aspects that are object to further requirements or recommendations.
Others	

605

6 Conformance Clauses

606

607 This chapter defines five AS4 conformance clauses.

607

6.1 AS4 ebHandler Conformance Clause

608

609 In order to conform to the AS4 ebHandler Profile, an implementation must comply with all normative
610 statements and requirements in Section 2.1.

611 In particular, it must:

- 612 ● Observe all requirements stated as such in the Feature Set table of Section 2.1.1.
- 613 ● Comply with WS-I requirements listed in Section 2.1.2.
- 614 ● Support the P-Mode parameters as required in Section 2.1.3.

615 In addition, the implementation must implement the additional features as indicated in Section 3.

616 Finally, the implementation must support the Usage Rules defined in Section 5.1 .

617 The Usage Agreements in Section 5.2 are not prescriptive, and implementations are free to support any
618 subset of the features described, that are not already mandated in sections 2.1, 3 or 5.1 .

6.2 AS4 Light Client Conformance Clause

619

620 In order to conform to the AS4 Light Client Profile, an implementation must comply with all normative
621 statements and requirements in Section 2.2.

622 In particular, it must:

- 623 ● Observe all requirements stated as such in the Feature Set table of Section 2.2.1.
- 624 ● Comply with WS-I requirements listed in Section 2.2.2.
- 625 ● Support the P-Mode parameters as required in Section 2.2.3.

626 In addition, the implementation must implement the additional features as indicated in Section 3.

627 Finally, the implementation must support the Usage Rules defined in Section 5.1 .

628 The Usage Agreements in Section 5.2 are not prescriptive, and implementations are free to support any
629 subset of the features described that are not already mandated in sections 2.2, 3 or 5.1 .

6.3 AS4 Minimal Client Conformance Clause

630

631 In order to conform to the AS4 Minimal Client Profile, an implementation **MUST** comply with all normative
632 statements and requirements for the AS4 Light Client Conformance Clause stated in Section 6.2 , with the
633 exception that support for WS-Security is limited to support for the WS-Security UsernameToken profile
634 [WSS11-UT], to be used for authorization of message pull signals (see section 7.10 in Core Spec).
635 Support for the WS-Security X.509 Certificate Token Profile 1.1 [WSS11-X509] is not **REQUIRED**. Clients
636 and servers **SHOULD** use transport level security for message security for any message exchange.

637 **6.4 AS2/AS4 ebHandler Conformance Clause**

638 In order to conform to the AS2/AS4 ebHandler Profile, an implementation MUST, in addition to supporting
639 AS4 message exchanges that comply with all normative statements and requirements specified in section
640 6.1 , also conform to the EDIINT Applicability Statement 2 (AS2, [RFC4130]).

641 **6.5 AS4 Multi-Hop Endpoint Conformance Clause**

642 In AS4, support for the multi-hop feature of ebMS 3.0 Part 2 is optional. In order to conform to the AS4
643 Multi-Hop Endpoint Conformance Clause, an implementation MUST conform to:

- 644 ● All normative statements and requirements specified in section 4 .
- 645 ● At least one of the other conformance clauses (AS4 ebHandler Conformance Clause, AS4 Light
646 Client Conformance Clause, AS4 Minimal Client Conformance Clause, or the AS2/AS4 ebHandler
647 Conformance Clause).

648

Appendix A Sample Messages

649

650 This appendix contains examples of:

- 651 ● an AS4 user message;
- 652 ● AS4 receipts providing Non-Repudiation of Receipt (NRR);
- 653 ● an AS4 Pull message signal.

Appendix A.1 User Message

654

655 The following example contains the SOAP envelope of an AS4 message from a Seller to a Buyer to
656 exchange an electronic invoice document. Both parties are identified using the GS1 global location
657 numbers [GLN] encoded using the ebCore Party Id type notation [ebCorePartyId]. The XML business
658 document is an XML document (only the root element is displayed) based on the version 2.0 UN/CEFACT
659 Cross-Industry Invoice schema [CII], which is contained in the SOAP body. The values of eb:Service
660 and eb:Action adopt the AS4 default values. The message is secured using a WS-Security header,
661 details of which are omitted. In AS4, a SOAP envelope is included in a SOAP-with-attachment container,
662 which is also not shown here.

```
663 <S12:Envelope
664   xmlns:S12="http://www.w3.org/2003/05/soap-envelope"
665   xmlns:wssse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd"
666   xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
667   xmlns:eb="http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/" >
668   <S12:Header>
669     <eb:Messaging S12:mustUnderstand="true" id="_9ecb9d3c-cef8-4006-ac18-f425c5c7ae3d">
670       <eb:UserMessage>
671         <eb:MessageInfo>
672           <eb:Timestamp>2011-04-03T14:49:28.886Z</eb:Timestamp>
673           <eb:MessageId>2011-921@5209999001264.example.com</eb:MessageId>
674         </eb:MessageInfo>
675         <eb:PartyInfo>
676           <eb:From>
677             <eb:PartyId type="urn:oasis:names:tc:ebcore:partyid-type:iso6523:0088"
678               >5209999001264</eb:PartyId>
679             <eb:Role>Seller</eb:Role>
680           </eb:From>
681           <eb:To>
682             <eb:PartyId type="urn:oasis:names:tc:ebcore:partyid-type:iso6523:0088"
683               >5209999001295</eb:PartyId>
684             <eb:Role>Buyer</eb:Role>
685           </eb:To>
686         </eb:PartyInfo>
687         <eb:CollaborationInfo>
688           <eb:Service>http://docs.oasis-open.org/ebxml-msg/as4/200902/service</eb:Service>
689           <eb:Action>http://docs.oasis-open.org/ebxml-msg/as4/200902/action</eb:Action>
690           <eb:ConversationId>2011-921</eb:ConversationId>
691         </eb:CollaborationInfo>
692         <eb:PayloadInfo>
693           <eb:PartInfo href="#_f8aa8b55-b31c-4364-94d0-3615ca65aa40"/>
694         </eb:PayloadInfo>
695       </eb:UserMessage>
696     </eb:Messaging>
697     <wsse:Security S12:mustUnderstand="true">
698       <!-- Content omitted -->
699     </wsse:Security>
700   </S12:Header>
701   <S12:Body wsu:Id=" f8aa8b55-b31c-4364-94d0-3615ca65aa40">
702     <CrossIndustryInvoice xmlns="urn:un:unece:uncefact:data:standard:CrossIndustryInvoice:2">
703       <!-- content omitted -->
704     </CrossIndustryInvoice>
705   </S12:Body>
706 </S12:Envelope>
```

707

708

709 Appendix A.2 Non-Repudiation of Receipt

710 When the NonRepudiationInformation element is used in a Receipt, it contains a sequence of
711 MessagePartNRInformation items for each message part for which evidence of non repudiation of receipt
712 is being provided. In the normal default usage, these message parts are those that have been signed in
713 the original message. Each message part is described with information defined by an XML Digital
714 Signature Reference information item. The following example illustrates the ebMS V3 Signal Message
715 header.

```
716
717 <eb3:Messaging S12:mustUnderstand="true" id="ValueOfMessagingHeader">
718   <eb3:SignalMessage>
719     <eb3:MessageInfo>
720       <eb3:Timestamp>2009-11-06T08:00:09Z</eb3:Timestamp>
721       <eb3:MessageId>orderreceipt@seller.com</eb3:MessageId>
722       <eb3:RefToMessageId>orders123@buyer.com</eb3:RefToMessageId>
723     </eb3:MessageInfo>
724     <eb3:Receipt>
725       <ebbp:NonRepudiationInformation>
726         <ebbp:MessagePartNRInformation>
727           <dsig:Reference URI="#5cb44655-5720-4cf4-a772-19cd480b0ad4">
728             <dsig:Transforms>
729               <dsig:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
730             </dsig:Transforms>
731             <dsig:DigestMethod Algorithm="http://www.w3.org/2000/09/xmldsig#sha1" />
732             <dsig:DigestValue>o9QDCwWSiGVQACEsJH5nqkVE2s0=</dsig:DigestValue>
733           </dsig:Reference>
734         </ebbp:MessagePartNRInformation>
735         <ebbp:MessagePartNRInformation>
736           <dsig:Reference URI="cid:ald7fdf5-d67e-403a-ad92-3b9deff25d43@buyer.com">
737             <dsig:Transforms>
738               <dsig:Transform
739                 Algorithm="http://docs.oasis-open.org/wss/oasis-wss-SwAProfile-1.1#Attachment-
740 Content-Signature-Transform" />
741             </dsig:Transforms>
742             <dsig:DigestMethod
743               Algorithm="http://www.w3.org/2000/09/xmldsig#sha1" />
744             <dsig:DigestValue>iWNSv2W6SxbOYZlPzZDcXAxrWI=</dsig:DigestValue>
745           </dsig:Reference>
746         </ebbp:MessagePartNRInformation>
747       </ebbp:NonRepudiationInformation>
748     </eb3:Receipt>
749   </eb3:SignalMessage>
750 </eb3:Messaging>
```

751

752 For a signed receipt, a Web Services Security header signing over the signal header (and other elements
753 as specified in sections 5.1.4 and 5.1.5) is required. An example WS-Security header is as follows:

754

```
755 <wsse:Security S12:mustUnderstand="true">
756   <wsu:Timestamp wsu:Id=" 1">
757     <wsu:Created>2009-11-06T08:00:10Z</wsu:Created>
758     <wsu:Expires>2009-11-06T08:50:00Z</wsu:Expires>
759   </wsu:Timestamp>
760   <wsse:BinarySecurityToken
761     EncodingType="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-soap-message-security-
762 1.0#Base64Binary"
763     ValueType="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-x509-token-profile-
764 1.0#X509v3">
765     wsu:Id=" 2">MIIFADCCBGmgAwIBAgIEOmitted</wsse:BinarySecurityToken>
766   <ds:Signature Id=" 3">
767     <ds:SignedInfo>
768       <ds:CanonicalizationMethod
769         Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
770       <ds:SignatureMethod
771         Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha1" />
772       <ds:Reference URI="#ValueOfMessagingHeader">
773         <ds:Transforms>
774           <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#">
775             <InclusiveNamespaces PrefixList="xsd"
```

```

776         xmlns="http://www.w3.org/2001/10/xml-exc-c14n#" />
777     </ds:Transform>
778 </ds:Transforms>
779     <ds:DigestMethod Algorithm="http://www.w3.org/2000/09/xmldsig#sha1" />
780     <ds:DigestValue>ZXnOmitted=</ds:DigestValue>
781 </ds:Reference>
782 <!-- Omitted other reference elements for other signed parts -->
783 </ds:SignedInfo>
784 <ds:SignatureValue>rxap4of8JCpUkOmitted=</ds:SignatureValue>
785 <ds:KeyInfo>
786     <wsse:SecurityTokenReference>
787     <wsse:Reference URI="#_2"
788         ValueType="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-x509-token-
789 profile-1.0#X509v3" />
790     </wsse:SecurityTokenReference>
791 </ds:KeyInfo>
792 </ds:Signature>
793 </wsse:Security>
794

```

795 **Appendix A.3 Pull Request Signal Message**

796 The following example shows an AS4 Pull Request Signal on a particular message partition channel. The
797 message contains two WS-Security headers:

- 798 1. The first WS-Security header is targeted to the “ebms” role, and is used for authorization of
799 access to the pull channel. This header is added to the message before the second WS-Security
800 header.
- 801 2. A second WS-Security header is used to protect the signal message itself. This header is added
802 to the message after the authorization header, and signs this authorization header, the ebMS
803 Messaging header and the (empty) SOAP Body element.

804

```

805 <S12:Envelope xmlns:S12="http://www.w3.org/2003/05/soap-envelope"
806     xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
807     xmlns:ds="http://www.w3.org/2000/09/xmldsig#"
808     xmlns:eb3="http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/"
809     xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-
810 1.0.xsd"
811     xmlns:wssu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-
812 1.0.xsd">
813     <S12:Header>
814         <eb3:Messaging S12:mustUnderstand="true" id='_ebmessaging' >
815             <eb3:SignalMessage>
816                 <eb3:MessageInfo>
817                     <eb3:Timestamp>2011-02-19T11:30:11.320Z</eb3:Timestamp>
818                     <eb3:MessageId>msg123@smallco.example.com</eb3:MessageId>
819                 </eb3:MessageInfo>
820                 <eb3:PullRequest mpc="http://as4.bigco.example.com/queues/q_456" />
821             </eb3:SignalMessage>
822         </eb3:Messaging>
823         <wsse:Security S12:role="ebms" S12:mustUnderstand="true" wsu:Id="_pullauthorization">
824             <wsse:UsernameToken>
825                 <wsse:Username>smallcoAS4</wsse:Username>
826                 <wsse:Password
827                     Type="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-username-token-
828 profile-1.0#PasswordDigest"
829                     >B5twk47KwSrjeg==</wsse:Password>
830                 <wsu:Created>2011-02-19T11:30:11.327Z</wsu:Created>
831             </wsse:UsernameToken>
832         </wsse:Security>
833         <wsse:Security S12:mustUnderstand="true">
834             <wsse:BinarySecurityToken wsu:Id="_smallco_cert">
835                 <!-- details omitted -->
836             </wsse:BinarySecurityToken>
837             <ds:Signature>
838                 <ds:SignedInfo>
839                     <ds:CanonicalizationMethod
840                         Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
841                     <ds:SignatureMethod

```

```

842     Algorithm="http://www.w3.org/2000/09/xmldsig#rsa-sha1"/>
843 <ds:Reference URI="#_ebmessaging">
844   <ds:Transforms>
845     <ds:Transform Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
846   </ds:Transforms>
847   <ds:DigestMethod Algorithm="http://www.w3.org/2000/09/xmldsig#sha1"/>
848   <ds:DigestValue>KshAH7QFFAw2sV5LQBOUSSrCaI=</ds:DigestValue>
849 </ds:Reference>
850 <ds:Reference URI="#_pullauthorization">
851   <ds:Transforms>
852     <ds:Transform
853       Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
854   </ds:Transforms>
855   <ds:DigestMethod
856     Algorithm="http://www.w3.org/2000/09/xmldsig#sha1"/>
857   <ds:DigestValue>PreCqm0ESZqmITjflqzrLFuOEYg=</ds:DigestValue>
858 </ds:Reference>
859 <ds:Reference URI="#_soapbody">
860   <ds:Transforms>
861     <ds:Transform
862       Algorithm="http://www.w3.org/2001/10/xml-exc-c14n#" />
863   </ds:Transforms>
864   <ds:DigestMethod
865     Algorithm="http://www.w3.org/2000/09/xmldsig#sha1"/>
866   <ds:DigestValue>FkwnI8mmXh71J5qcw0404ZnlXpg=</ds:DigestValue>
867 </ds:Reference>
868 </ds:SignedInfo>
869 <ds:SignatureValue>
870   <!-- details omitted -->
871 </ds:SignatureValue>
872 <ds:KeyInfo>
873   <wsse:SecurityTokenReference>
874     <wsse:Reference URI="#_smallco_cert"
875       ValueType="http://docs.oasisopen.org/wss/2004/01/oasis-200401-wss-
876 x509-token-profile-1.0#x509v3"
877     />
878   </wsse:SecurityTokenReference>
879 </ds:KeyInfo>
880 </ds:Signature>
881 </wsse:Security>
882 </S12:Header>
883 <S12:Body wsu:Id="_soapbody" />
884 </S12:Envelope>
885

```


Appendix B Generating an AS4 Receipt

887 The following XSLT 1.0 stylesheet generates an AS4 Receipt message from an AS4 message, as
 888 specified in section 4.4 . The stylesheet supports processing signed messages for which the
 889 **Pmode[1].Security.SendReceipt.NonRepudiation** is set to true. It could be used in an AS4 MSH
 890 after a WS-Security module has verified the `wsse:Security` header in the user message, allowing the
 891 reuse of `ds:Reference` elements in the user message in the AS4 Receipt. Note that this section is
 892 non-normative: AS4 implementations are not required to use this (or any other) XSLT stylesheet to
 893 generate receipts for user messages.

894 The stylesheet handles both the peer-to-peer, direct exchange (based on AS4 profiling of [ebMS3CORE])
 895 and indirect exchange through an I-Cloud (based on AS4 profiling of [ebMS3ADV]). The generation of
 896 `ebint:RoutingInput` structures supports default MPC values in the user messages.

897

```

898 <?xml version="1.0" encoding="UTF-8"?>
899 <xsl:stylesheet
900   xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
901   xmlns:S12="http://www.w3.org/2003/05/soap-envelope"
902   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
903   xmlns:wsa="http://www.w3.org/2005/08/addressing"
904   xmlns:ebint="http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/multihop/200902/"
905   xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd"
906   xmlns:eb3="http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/"
907   xmlns:ds="http://www.w3.org/2000/09/xmldsig#"
908   xmlns:ebbp="http://docs.oasis-open.org/ebxml-bp/ebbp-signals-2.0"
909   xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
910   version="1.0" >
911
912   <xsl:output method="xml" indent="yes"/>
913
914   <xsl:param name="messageid">messageid</xsl:param>
915   <xsl:param name="timestamp">2011-03-23T19:43:11.735Z</xsl:param>
916
917   <xsl:template match="S12:Envelope">
918     <S12:Envelope>
919       <xsl:apply-templates />
920     </S12:Envelope>
921   </xsl:template>
922
923   <xsl:template match="S12:Header">
924     <S12:Header>
925       <xsl:apply-templates select="eb3:Messaging" />
926     </S12:Header>
927   </xsl:template>
928
929   <xsl:template match="S12:Body">
930     <S12:Body wsu:Id="{generate-id()}" />
931   </xsl:template>
932
933   <xsl:template
934     match="eb3:Messaging[
935       @S12:role='http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh']">
936     <xsl:variable name="mpc">
937       <xsl:choose>
938         <xsl:when
939           test="descendant::eb3:UserMessage[1]/@mpc"><xsl:value-of
940             select="descendant::eb3:UserMessage[1]/@mpc"/>
941         </xsl:when>
942         <xsl:otherwise>http://docs.oasis-open.org/ebxml-
943 msg/ebms/v3.0/ns/core/200704/defaultMPC</xsl:otherwise>
944       </xsl:choose>
945     </xsl:variable>
946     <wsa:To wsu:Id="{concat('_wsato_',generate-id())}"
947       S12:role="http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh"
948       S12:mustUnderstand="true"
949       >http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/icloud</wsa:To>
950     <wsa:Action wsu:Id="{concat('_wsaaction_',generate-id())}"
951       >http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/core/200704/oneWay.receipt</wsa:Action>
952     <ebint:RoutingInput wsa:IsReferenceParameter="true"
953       id="{concat('_ebroutinginput_',generate-id())}"
954       S12:mustUnderstand="true"
955       S12:role="http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh">
956       <ebint:UserMessage mpc="{concat($mpc,
957         'receipt')}">
958         <eb3:PartyInfo>

```

```

959         <eb3:From>
960             <xsl:copy-of select="descendant::eb3:UserMessage[1]//eb3:To/eb3:PartyId"/>
961             <xsl:copy-of select="descendant::eb3:UserMessage[1]//eb3:To/eb3:Role"/>
962         </eb3:From>
963         <eb3:To>
964             <xsl:copy-of select="descendant::eb3:UserMessage[1]//eb3:From/eb3:PartyId"/>
965             <xsl:copy-of select="descendant::eb3:UserMessage[1]//eb3:From/eb3:Role"/>
966         </eb3:To>
967     </eb3:PartyInfo>
968     <eb3:CollaborationInfo>
969         <xsl:copy-of select="descendant::eb3:UserMessage[1]//eb3:Service"/>
970         <eb3:Action><xsl:value-of
971             select="concat(descendant::eb3:UserMessage[1]//eb3:Action,
972                 '.receipt')"/></eb3:Action>
973         <xsl:copy-of
974             select="descendant::eb3:UserMessage[1]//eb3:ConversationId"/>
975     </eb3:CollaborationInfo>
976 </ebint:UserMessage>
977 </ebint:RoutingInput>
978 <eb3:Messaging
979     S12:mustUnderstand="true" id="{concat('_ebmessaging_',generate-id())}">
980     <xsl:apply-templates select="descendant-or-self::eb3:UserMessage" />
981 </eb3:Messaging>
982 </xsl:template>
983
984 <xsl:template
985     match="eb3:Messaging[not (
986     @$S12:role='http://docs.oasis-open.org/ebxml-msg/ebms/v3.0/ns/part2/200811/nextmsh')]">
987     <eb3:Messaging S12:mustUnderstand="true" id="{concat('_ebmessaging_',generate-id())}">
988         <xsl:apply-templates select="descendant-or-self::eb3:UserMessage" />
989     </eb3:Messaging>
990 </xsl:template>
991
992 <xsl:template match="eb3:UserMessage">
993     <eb3:SignalMessage>
994         <eb3:MessageInfo>
995             <eb3:Timestamp><xsl:value-of
996                 select="$timestamp"/></eb3:Timestamp>
997             <eb3:MessageId><xsl:value-of
998                 select="concat(generate-id(),'_', $messageid)"/></eb3:MessageId>
999             <eb3:RefToMessageId><xsl:value-of
1000                 select="descendant::eb3:MessageId"/></eb3:RefToMessageId>
1001         </eb3:MessageInfo>
1002         <eb3:Receipt>
1003             <xsl:choose>
1004                 <xsl:when test="/S12:Envelope/S12:Header/wsse:Security/ds:Signature">
1005                     <ebbp:NonRepudiationInformation>
1006                         <xsl:apply-templates select="//ds:Reference" />
1007                     </ebbp:NonRepudiationInformation>
1008                 </xsl:when>
1009             </xsl:choose>
1010         </eb3:Receipt>
1011     </eb3:SignalMessage>
1012 </xsl:template>
1013
1014 <xsl:template match="ds:Reference">
1015     <ebbp:MessagePartNRInformation>
1016         <xsl:copy-of select="current()"/>
1017     </ebbp:MessagePartNRInformation>
1018 </xsl:template>
1019
1020 </xsl:stylesheet>

```

1021

Appendix C Acknowledgments

1022

The following individuals were members of the committee during the development of this specification or

1023

of a previous version of it:

- Timothy Bennett, Drummond Group Inc. <timothy@drummondgroup.com>
- Jacques Durand, Fujitsu America Inc. <jdurand@us.fujitsu.com>
- Richard Emery, Axway Software <remery@us.axway.com>
- Ian Jones, British Telecommunications plc <ian.c.jones@bt.com>
- Sander Fieten, Individual <sander@fieten-it.com>
- Theo Kramer, Flame Computing Enterprises <theo@flame.co.za>
- Dale Moberg, Axway Software <dmoberg@axway.com>
- Makesh Rao, Cisco Systems, Inc. <marao@cisco.com>
- Pim van der Eijk, Sonnenglanz Consulting <pvde@sonnenglanz.net>
- John Voss, Cisco Systems, Inc. <jovoss@cisco.com>

1024

Appendix D Revision History

Rev	Date	By Whom	What
	25 Jul 2008	J. Durand / T. Bennett	Initial draft
Rev 02	28 Oct 2008	J. Durand	candidate CD draft
Rev 03	15 Feb 2009	J. Durand	Various edits, updates on Receipts, Message samples.
CD 2	10/03/09	J. Durand	CD 2 draft for PR
CS 01	04/24/10	J. Durand	Document voted Committee Specification 01
Rev 06	02/22/11	J. Durand / P. van der Eijk	CSD 3 draft for PR: Many minor editorial updates and clarifications; updated references; new sections 2.2.3 and A.2.
CSD 03	02/23/11	P. van der Eijk	Document approved as CSD 03 on 2011-02-23 http://www.oasis-open.org/apps/org/workgroup/ebxml-msg/download.php/41302/MessagingTC022311.htm
WD 8	03/28/11	J. Durand / T. Kramer	Follow-up on Theo comments; normalized PMode name as "P-Mode", when in plain text. 2.1.3.1 and 2.2.3.1: made support "required" for PMode.ID and PMode.agreement (meaning an implementation must be able to use this Pmode value - if present - to fill-in the related message header element.)
WD 9	04/04/11	P. van der Eijk	Updated revision history and frontpage; suppressed line numbering in footers. Renamed some references to ebMS3 to "ebMS3 Core". New optional profiling of the ebMS3, Part 2 multi-hop feature; New sample user message in appendix A. New Appendix B, Generating an AS4 Receipt . In Acknowledgments, names are ordered alphabetically by last name.
WD 10	04/11/11	P. van der Eijk	Improved language in section 4 (comment made by Theo), A.1 and B. In sample user message, added an id attribute to eb:Messaging (as it would need one to be signed). Appendix A.3, fixed a hash value. (The values are illustrative only but should be different).
WD 11	04/12/11	P. van der Eijk	Improved sample message (added missing S12:mustUnderstand attribute). Removed requirement to pass receipts to applications.
WD 12	04/20/11	P. van der Eijk	Fixed bad reference in 6.5

Rev	Date	By Whom	What
			Fixed two affiliations
WD 13 / WD 14	04/22/11	P. van der Eijk	Fixed citations and front matter.
WD 15	05/09/11	P. van der Eijk	Update for message format of receipts for unsigned messages, supporting "reception awareness". Section 3.2 added clarification that reception awareness requires sending of receipts.
WD 16	05/16/11	P. van der Eijk / Jacques Durand	Discussion of receipts for messages without PayloadInfo. Fixed some section reference numbers and missing references. Many minor textual improvements. Part 2 profiling as "complementary" to a "primary" profiling of Part 1.
WD 17	05/18/11	P. van der Eijk	Simplified Encryption, ebMS header is never encrypted (section 5.1.6) Added note on "id" attribute in section 5.1.4 .

1027