
Business Document Envelope Version 1.0

Committee Specification Draft 01 / Public Review Draft 01

04 March 2015

Specification URIs

This version:

<http://docs.oasis-open.org/bdxx/bdx-bde/v1.0/csprd01/bdx-bde-v1.0-csprd01.xml> (Authoritative)
<http://docs.oasis-open.org/bdxx/bdx-bde/v1.0/csprd01/bdx-bde-v1.0-csprd01.html>
<http://docs.oasis-open.org/bdxx/bdx-bde/v1.0/csprd01/bdx-bde-v1.0-csprd01.pdf>

Previous version:

N/A

Latest version:

<http://docs.oasis-open.org/bdxx/bdx-bde/v1.0/bdx-bde-v1.0.html>
<http://docs.oasis-open.org/bdxx/bdx-bde/v1.0/bdx-bde-v1.0.pdf>

Technical Committee:

OASIS Business Document Exchange (BDXR) TC

Chair:

Kenneth Bengtsson (kenneth@alfa1lab.com), Alfa1lab

Editors:

G. Ken Holman (gkholman@CraneSoftwrights.com), Crane Softwrights Ltd.
Kenneth Bengtsson (kenneth@alfa1lab.com), Alfa1lab

Declared XML Namespaces:

<http://docs.oasis-open.org/bdxx/ns/bde/1.0/Envelope>
<http://docs.oasis-open.org/bdxx/ns/bde/1.0/AggregateComponents>
<http://docs.oasis-open.org/bdxx/ns/bde/1.0/BasicComponents>
<http://docs.oasis-open.org/bdxx/ns/bde/1.0/ExtensionComponents>
<http://docs.oasis-open.org/bdxx/ns/bde/1.0/QualifiedDataTypes>
<http://docs.oasis-open.org/bdxx/ns/bde/1.0/UnqualifiedDataTypes>

Abstract:

This specification defines a business-oriented artefact enveloping a payload of one or more business documents or other artefacts with supplemental semantic information about the collection of payloads as a whole. This is distinct from any transport-layer infrastructure envelope that may be required to propagate documents from one system to another. A business document envelope describes contextual information important to the sender and receiver about the payloads, without having to modify the payloads in any fashion.

Status:

This document was last revised or approved by the OASIS Business Document Exchange (BDXR) TC on the above date. The level of approval is also listed above. Check the "Latest version" location noted above for possible later revisions of this document. Any other numbered Versions and other technical work produced by the Technical Committee (TC) are listed at https://www.oasis-open.org/committees/tc_home.php?wg_abbrev=bdxr#technical.

TC members should send comments on this specification to the TC's email list. Others should send comments to the TC's public comment list, after subscribing to it by following the instructions at the "Send A Comment" button on the TC's web page at <https://www.oasis-open.org/committees/bdxr/>.

For information on whether any patents have been disclosed that may be essential to implementing this specification, and any offers of patent licensing terms, please refer to the Intellectual Property Rights section of the Technical Committee web page at <https://www.oasis-open.org/committees/bdxr/ipr.php>.

See [Appendix A, Release notes \(Non-Normative\)](#) for more information regarding this release package.

Citation format:

When referencing this specification the following citation format should be used:

[BDX-BDE-V1.0] *Business Document Envelope Version 1.0*. Edited by G. Ken Holman and Kenneth Bengtsson. 04 March 2015. Committee Specification Draft 01 / Public Review Draft 01. <http://docs.oasis-open.org/bdxr/bdx-bde/v1.0/csprd01/bdx-bde-v1.0-csprd01.html>. Latest version: <http://docs.oasis-open.org/bdxr/bdx-bde/v1.0/bdx-bde-v1.0.html>.

Notices

Copyright © OASIS Open 2015. All Rights Reserved.

All capitalized terms in the following text have the meanings assigned to them in the OASIS Intellectual Property Rights Policy (the “OASIS IPR Policy”). The full [Policy](#) may be found at the OASIS website.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to OASIS, except as needed for the purpose of developing any document or deliverable produced by an OASIS Technical Committee (in which case the rules applicable to copyrights, as set forth in the OASIS IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by OASIS or its successors or assigns.

This document and the information contained herein is provided on an “AS IS” basis and OASIS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

OASIS requests that any OASIS Party or any other party that believes it has patent claims that would necessarily be infringed by implementations of this OASIS Committee Specification or OASIS Standard notify OASIS TC Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification.

OASIS invites any party to contact the OASIS TC Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this specification by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification. OASIS may include such claims on its website, but disclaims any obligation to do so.

OASIS takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on OASIS’ procedures with respect to rights in any document or deliverable produced by an OASIS Technical Committee can be found on the OASIS website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this OASIS Committee Specification or OASIS Standard, can be obtained from the OASIS TC Administrator. OASIS makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

The name “OASIS” is a trademark of [OASIS](#), the owner and developer of this specification, and should be used only to refer to the organization and its official outputs. OASIS welcomes reference to, and implementation and use of, specifications, while reserving the right to enforce its marks against misleading uses. Please see <https://www.oasis-open.org/policies-guidelines/trademark.php> for guidance.

Table of Contents

1 Introduction	5
1.1 Terminology	5
1.1.1 Key words	5
1.1.2 Terms and Definitions	5
1.1.3 Symbols and Abbreviations	5
1.1.4 Key concepts	6
1.2 Normative References	6
1.3 Non-Normative References	6
2 Requirements	7
2.1 High-level and non-functional requirements	7
2.2 Functional requirements	7
3 Envelope information	9
3.1 The envelope class	9
3.1.1 Additional envelope information	10
3.2 The payload class	11
3.2.1 Additional payload information	12
3.2.2 Positional semantics of multiple payloads	12
3.2.3 Non-XML payload syntax constraint	12
3.3 The external reference class	13
3.4 Model expression	13
4 XML schemas	14
4.1 The schema subdirectories	14
4.2 The envelope schema	14
4.3 The common schemas	14
4.4 Unqualified data type attributes	15
4.5 Content data type schemas	18
4.5.1 Extension content	18
4.5.2 Payload content	18
5 Conformance	19

Appendixes

A Release notes (Non-Normative)	20
A.1 Availability	20
A.2 Package structure	20
B Acknowledgements (Non-Normative)	21
C Demonstration environment (Non-Normative)	22
D Revision History (Non-Normative)	26

1 Introduction

The metaphor of a paper envelope in which one places business documents for transport or management is apt to describe the role of a business document envelope in relationship to its payloads. Concepts of routing, authentication, non-repudiation and concealment all apply in both the metaphor and the electronic equivalent.

The OASIS Business Document Envelope specifies an XML vocabulary expressing in machine-processable syntax the semantics of enveloping a payload of content with information about that content.

This specification details example candidate scenarios in which a payload envelope plays a role, and the use cases identified in such scenarios.

This specification enumerates the information components of the payload envelope and formally describes the semantics of each component.

This specification mandates a suite of XML schemas describing the document constraints against which a conforming instance must validate without error.

1.1 Terminology

1.1.1 Key words

The key words *must*, *must not*, *required*, *shall*, *shall not*, *should*, *should not*, *recommended*, *may*, and *optional* in this document are to be interpreted as described in [\[RFC 2119\]](#). Note that for reasons of style, these words are not capitalized in this document.

1.1.2 Terms and Definitions

schema

An expression of constraints placed on XML content.

structural schema

An expression of structural constraints placed on XML elements, attributes and textual content.

value constraints

An expression of constraints placed on the values of attributes and textual content.

1.1.3 Symbols and Abbreviations

DTQ

Data type qualifications

RFC

Request for comment

XSD

XML Schema Definition

XSLT

Extensible Stylesheet Language Transformations

1.1.4 Key concepts

validation

The act of testing an XML document against a set of structural constraints (as expressed in a schema) or value constraints (as expressed in an arbitrary XML processing language, for example, XSLT).

1.2 Normative References

[**CCTS - ISO/TS 15000-5:2005**] *ISO/TS 15000-5:2005 Electronic Business Extensible Markup Language (ebXML)— Part 5: ebXML Core Components Technical Specification, Version 2.01* [<https://www.oasis-open.org/committees/download.php/6232/CEFACT-CCTS-Version-2pt01.zip>] (identical to Part 8 of the ebXML Framework)

[**genericode**] *Code List Representation (Genericode) Version 1.0*. Edited by Anthony B. Coates. 28 December 2007. Committee Specification 01. <http://docs.oasis-open.org/codelist/genericode/>. Latest version: <http://docs.oasis-open.org/codelist/genericode/doc/oasis-code-list-representation-genericode.html>.

[**RFC 2119**] *Key words for use in RFCs to Indicate Requirement Levels*, March 1997. S. Bradner. IETF (Internet Engineering Task Force) RFC 2119, <http://www.ietf.org/rfc/rfc2119.txt>

[**XML**] *Extensible Markup Language (XML) 1.0 (Fifth Edition)*, W3C Recommendation 26 November 2008 [<http://www.w3.org/TR/2008/REC-xml-20081126/>]

[**XSD1**] *XML Schema Part 1: Structures. Second Edition. W3C Recommendation 28 October 2004* [<http://www.w3.org/TR/2004/REC-xmlschema-1-20041028/>]

[**XSD2**] *XML Schema Part 2: Datatypes. Second Edition. W3C Recommendation 28 October 2004* [<http://www.w3.org/TR/2004/REC-xmlschema-2-20041028/>]

1.3 Non-Normative References

[**xmlsig**] *XML-Signature Syntax and Processing. W3C Recommendation 10 June 2008* [<http://www.w3.org/TR/2008/REC-xmlsig-core-20080610/>]

2 Requirements

Based on the purpose of this document the following main requirements have been identified:

2.1 High-level and non-functional requirements

- The BDE must be an electronic envelope and universally understandable document header that allows its originator to send one or more electronic business documents to a recipient.
- The BDE must be payload agnostic, meaning that it must function completely independently from its content.
- The BDE must be an independent work product with no bindings or references to specific document standards.
- The BDE must be transport protocol agnostic, meaning that it must be possible to send and receive a BDE through any file transfer protocol.
- It must be possible to route a BDE through several intermediaries and networks.
- It must be possible for the sender and receiver of a BDE to keep its payload confidential from end to end.
- It must be possible for the receiver of a BDE to verify the integrity of its payload.
- A gateway or intermediary must be able to route a BDE without any knowledge of its payload.
- The BDE should support business scenarios where it is required to unambiguously establish the identity of its sender.
- The BDE should support business scenarios where it is required to keep the identity of its sender hidden.

2.2 Functional requirements


Requirement	Description
BDE-01	A BDE must contain an identifier that uniquely identifies the envelope.
BDE-02	It must be possible to specify the BDE version of the envelope.
BDE-03	A BDE must contain a timestamp for its creation.
BDE-04	A BDE must contain unambiguous identification of its final recipient.
BDE-05	It must be possible to include information in a BDE that unambiguously identifies the originating party.
BDE-06	It must be possible for the originating party to digitally sign a BDE with any number of signatures.
BDE-07	A BDE must contain one or more payloads.
BDE-08	It must be possible to uniquely identify each payload in a BDE.
BDE-09	It must be possible to specify the document syntax for each payload in a BDE.
BDE-10	It must be possible to identify the reference to a relevant resource, such as a specific agreement, case, document, prior correspondence, etc.
BDE-11	It must be possible to identify any customization that applies to the document of a given payload.

Requirement	Description
BDE-12	It must be possible to specify if the document of a given payload is a transaction in a business process with a predefined profile ID.
BDE-13	It must be possible to specify the appropriate service for handling the document of a payload, if not specified by a predefined profile ID.
BDE-14	It must be possible for a BDE to contain payloads that have been encrypted, as long as they have been expressed in such a way as to not interfere with the XML schema.
BDE-15	It must be possible for the recipient to identify if a given payload of a BDE has been encrypted.
BDE-16	It must be possible to include the hash value of an unencrypted payload of a BDE in order to verify its integrity.
BDE-17	It must be possible to set a flag identifying a BDE as a test message.

3 Envelope information

The CCTS-modeled classes of information in the envelope model, and the relationships between them and the additional schema fragments that satisfy non-CCTS-modeled content are depicted in Figure 1, "Information classes".

Figure 1. Information classes

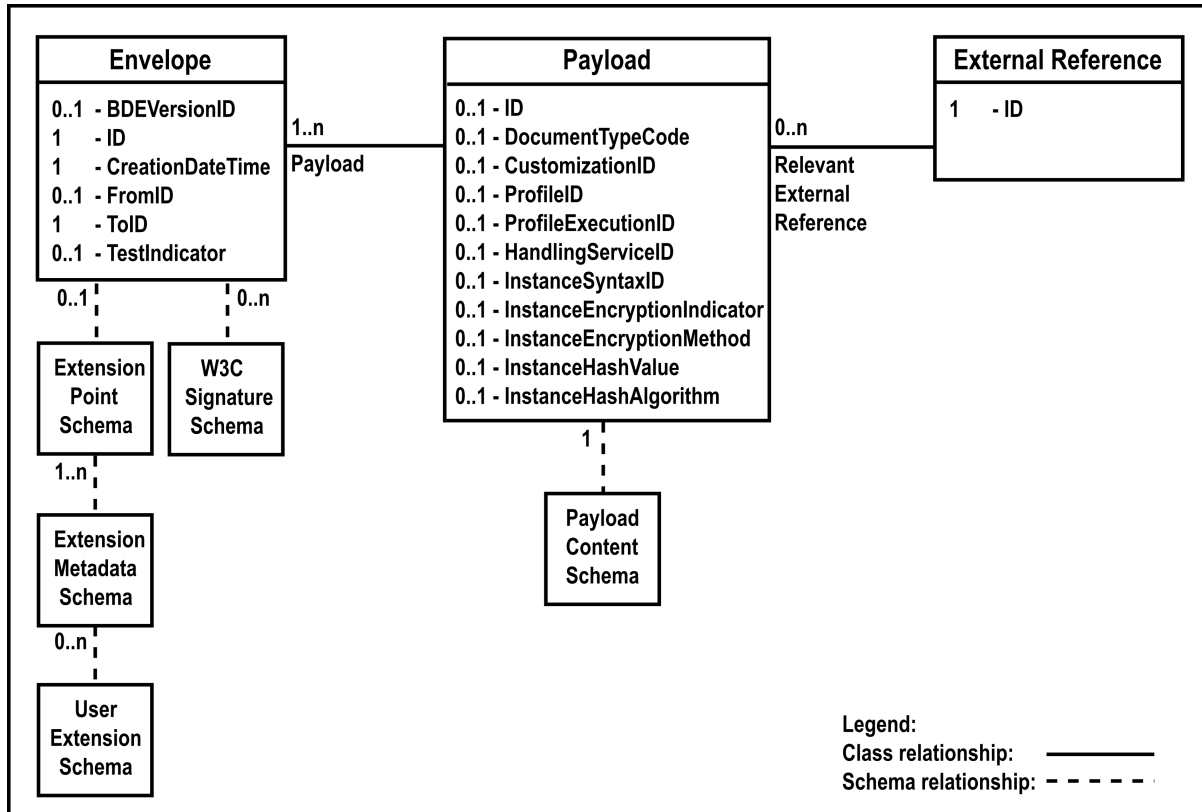

3.1 The envelope class

The CCTS-modeled objects in the envelope class are as follows, indicating the requirements being met by the object:

Supports	Name (Unqualified data type)	Description	Crd	Rationale
BDE-02	BDEVersionID (Identifier)	The version of the specific envelope model in use.	0..1	To allow coexistence of different versions of envelopes without using the namespace. The element identifies which syntax version is being used.
BDE-01	ID (Identifier)	Unique ID for the envelope for tracking purposes.	1..1	Required to identify and trace the envelope. The ID must be at least unique pr. sender.
BDE-03	CreationDateTime (DateTime)	Date and time when the envelope was created.	1..1	The value of the CreationDateAndTime element MUST be set to the date and time when the document originating

				application or the parser created the document.
BDE-04	FromID (Identifier)	An unambiguous identification of the party that originated the envelope.	0..1	The identity of the envelope originator needs to be identified.
BDE-05	ToID (Identifier)	An unambiguous identification of the destination of the envelope.	1..1	A unique identification key to unambiguously identify the Receiver party. Example: GS1 GLN.
BDE-17	TestIndicator (Indicator)	There is a requirement to identify that the content inside the envelope is for test purposes.	0..1	The test flag will enable the recipient to identify an incoming message as a test or production message.
BDE-07	Payload (Payload class)	The actual payload, such as an invoice, to be processed at next level.	1..n	An envelope without payload serves no purpose.

3.1.1 Additional envelope information

Certain information related to the envelope are not modeled as CCTS classes, rather, they are realized in the schema expressions as additional document constraints.

3.1.1.1 Extension information

Through the use of optional extension metadata and content, additional user-defined information that is not modelled by the CCTS classes can be added to the envelope instance.

The extension point is an optional construct as the initial child of the document element. The extension point, when it exists, must contain one or more user-defined extensions, with each extension wrapped with optional extension metadata identifying properties of the extension.

Name (Unqualified Data Type)	Description	Crd	Rationale
BDEExtensions	A container for all extensions present in the document.	0..1	This is the single point of access to all extensions as the first child of the main document.
BDEExtension	A single extension for private use.	1..n	There may be many extensions added to a single document.
ExtensionID (Identifier)	An identifier for the Extension assigned by the creator of the extension.	0..1	This identifies the extension amongst other extensions within the document.
ExtensionName (Name)	A name for the Extension assigned by the creator of the extension.	0..1	This identifies the extension in natural language within the document.
ExtensionAgencyID (Identifier)	An agency that maintains one or more Extensions.	0..1	This identifies who created the extension.
ExtensionAgencyName (Name)	The name of the agency that maintains the Extension.	0..1	This identifies who created the extension.
ExtensionAgencyURI (Identifier)	A URI for the Agency that maintains the Extension.	0..1	This identifies who created the extension.
ExtensionVersionID (Identifier)	The version of the Extension.	0..1	This distinguishes one version of the extension from another.

ExtensionURI (Identifier)	A URI for the Extension.	0..1	This identifies the extension amongst other extensions outside of any document.
ExtensionReasonCode (Code)	A code for reason the Extension is being included.	0..1	This gives the author the opportunity to give rationale by way of a code.
ExtensionReason (Text)	A description of the reason for the Extension.	0..1	This gives the author the opportunity to give rationale by way of a text description.
ExtensionContent	The definition of the extension content.	1	This is the parent element of the extension content.

There are no restrictions on the extension content. See [Section 4.5.1, "Extension content"](#) for more information.

3.1.1.2 Signature information

This meets requirement [BDE-06](#).

Through the use of the W3C Digital Signature [[xmldsig](#)] zero or more signatures can be added to the envelope.

The signatures are grouped as the final children of the document element.

The `va1/` subdirectory includes examples of envelope documents with bona fide digital signatures as described in [Appendix C, Demonstration environment \(Non-Normative\)](#).

3.2 The payload class

The CCTS-modeled objects in the payload class are as follows, indicating the requirements being met by the object:

Supports	Name (Unqualified Data Type)	Description	Crd	Rationale
BDE-08	ID (Identifier)	A unique identification of the payloads contained within the envelope.	0..1	Required to be able to identify the content of the payload without having to look inside the envelope.
BDE-09	DocumentTypeID (Identifier)	This element identifies the type of the payload instance in the envelope.	0..1	To enable a Service registry lookup to verify and identify the type of payload.
BDE-11	CustomizationID (Identifier)	Identifies the customization that applies to the received document.	0..1	May be used to control validation of the content of the document that is contained in the document instance.
BDE-12	ProfileID (Identifier)	Identifies the profile that the payload document is part of.	0..1	May be used to route the incoming document to the correct process dependent on which business process the payload instance is part of, e.g. an order response that is part of a process defined in the identified profile.

BDE-12	ProfileExecutionID (Identifier)	Identifies the particular instance of an executing profile that the payload document is part of.	0..1	This distinguishes between multiple executing instances of a given profile.
BDE-13	HandlingServiceID (Identifier)	Identifies the service that should process the payload instance.	0..1	Can be used to look up the target service that should be used to process the payload instance.
BDE-09	InstanceSyntaxID (Identifier)	Identifies the syntax that the payload document is expressed in.	0..1	Makes it possible to route the incoming message to the appropriate process depending on the document syntax.
BDE-15	InstanceEncryptionIndicator (Indicator)	An indicator to state whether the payload instance is encrypted or not.	0..1	The fact that a payload is encrypted may need to be identified in order to ensure correct processing.
BDE-15	InstanceEncryptionMethod (Text)	The method used to encrypt the payload instance.	0..1	The fact that a payload is encrypted may need to be identified in order to ensure correct processing.
BDE-16	InstanceHashValue (Text)	Hash total of the unencrypted payload document.	0..1	The hash provides a check of the integrity of any unencrypted payload.
BDE-16	InstanceHashAlgorithm (Text)	Algorithm used to calculate the hash total of the unencrypted payload document.	0..1	Different schemes for calculating the hash are possible to be used and so should be identified.
BDE-10	RelevantExternalReference (External Reference class)	A reference to a business case, document or other issues which are relevant to the handling of the envelope.	0..n	To enable routing and other handling, such as opening of an envelope based on the referenced information such as a reference to a specific call for tender to which the envelope contains a response (e.g. a tender).

3.2.1 Additional payload information

Certain information related to the payload is not modeled as a CCTS class, rather, it is realized in the schema expressions as a set of additional document constraints. See [Section 4.5.2, "Payload content"](#) for more details.

3.2.2 Positional semantics of multiple payloads

When there exists more than one payload in a business document envelope, the first payload in document order shall be considered the primary payload.

3.2.3 Non-XML payload syntax constraint

When the payload syntax is not XML it must be encoded in the payload content in such a way as not to interfere with the XML processing of the content as simple text. Sensitive XML markup characters in simple text, the "<", "&" and ">", must be escaped using an entity or a numeric character reference.

Note

Binary payloads cannot be processed as simple text in an XML document without being encoded. Such content must be encoded using a technique such as Base64 or Xxencoding, both of which can be used in the raw without character escaping. A technique such as Uuencode cannot be used in the raw because its encoded repertoire includes sensitive XML markup characters that would need to be escaped in order to be used.

3.3 The external reference class

The CCTS-modeled objects in the external reference class are as follows, indicating the requirements being met by the object:

Supports	Name (Unqualified Data Type)	Description	Crd	Rationale
BDE-10	ID (Identifier)	A reference to a business case, document or other issues which are relevant to the handling of the envelope.	1	To enable routing and other handling, such as opening of an envelope based on the referenced information such as a reference to a specific call for tender to which the envelope contains a response (e.g. a tender).

3.4 Model expression

The document model is expressed in three ways, found in three files of the model subdirectory:

- `mod`
 - `BDE-Model-1.0.ods`
 - model information expressed in an Open Office spreadsheet
 - `BDE-Model-1.0.xls`
 - model information expressed in an Excel spreadsheet
 - `BDE-Entities-1.0.gc`
 - model information expressed in a genericcode [[genericode](#)] file

4 XML schemas

The structural document constraints of the envelope are expressed normatively as a set of W3C XSD XML Schemas.

4.1 The schema subdirectories

The schemas are delivered in two subdirectories:

- **xsd**
 - CCTS documentation is included as XSD annotations
- **xsdrt**
 - runtime version such that CCTS documentation is not included as XSD annotations
 - without the annotations a W3C schema processor has less work to prepare for validating documents

In both subdirectories there is a single subdirectory of common files:

- **common**
 - included schema fragments by any document fragment

4.2 The envelope schema

The following is the only Document ABIE schema:

- **BDE-Envelope-1.0.xsd**
 - included schema fragments by any base fragment

4.3 The common schemas

The following are read-only schema fragments in the common subdirectory:

- **BDE-CommonAggregationComponents-1.0.xsd**
 - the Library ABIE element declarations
- **BDE-CommonBasicComponents-1.0.xsd**
 - the Library BBIE element declarations
- **BDE-CommonExtensionComponents-1.0.xsd**
 - the Document ABIE extension metadata declarations
- **BDE-QualifiedDataTypes-1.0.xsd**
 - the qualified data types (empty; none are defined)
- **BDE-UnqualifiedDataTypes-1.0.xsd**
 - the unqualified data types based on the core component types

- see [Section 4.4, “Unqualified data type attributes”](#) for more details
- **BDE-XAdESv132-1.0.xsd**
 - the v1.3.2 XAdES schema fragment from the etsi.org web site
- **BDE-XAdESv141-1.0.xsd**
 - the v1.4.1 XAdES schema fragment from the etsi.org web site
- **BDE-xmlsig1-schema-1.0.xsd**
 - the XML Digital Signature 1.1 schema driver fragment copyrighted by W3C
- **BDE-xmlsig11-schema-1.0.xsd**
 - the XML Digital Signature 1.1 schema fragment copyrighted by W3C
- **BDE-xmlsig-core-schema-1.0.xsd**
 - the XML Digital Signature Core schema fragment copyrighted by W3C
- **CCTS_CCT_SchemaModule-1.0.xsd**
 - the Core Component Types schema fragment copyrighted by UN/CEFACT

The following are read-write schema fragments in the common subdirectory:

- **BDE-ExtensionContentType-1.0.xsd**
 - the schema constraints of any extensions that users may wish to impose
 - as delivered this imposes no constraints and so the extension content is not validated
 - see [Section 4.5, “Content data type schemas”](#) for more details
- **BDE-PayloadContentType-1.0.xsd**
 - the schema constraints of any payload that users may wish to impose
 - as delivered this imposes no constraints and so the payload content is not validated
 - see [Section 4.5, “Content data type schemas”](#) for more details

4.4 Unqualified data type attributes

In the Business Document Envelope model each BBIE is indicated to have a particular component name (specifying the element name) and to be of a particular unqualified data type (specifying the base type value constraints and the attributes).

Based on the 10 approved core component types described in section 8.1 of [[CCTS - ISO/TS 15000-5:2005](#)], there are 20 available unqualified data types for BBIE values. Each data type has a constraint on its content (the component) and a possibly-empty selection of available possibly-required attributes (the supplementary components).

Note

Not all of the unqualified data types listed in this table are used in the envelope model, but they are enumerated here for completeness.

Data Type	Base type (XSD)	Supplementary component (attribute)	Cardinality	Type (XSD)	Definition
Amount	xsd:decimal	A number of monetary units specified using a given unit of currency.			
		currencyID	required	xsd:normalized-String	The currency of the amount.
		currencyCodeListVersionID	optional	xsd:normalized-String	The VersionID of the UN/ECE Rec9 code list.
Binary Object Graphic Picture Sound Video	xsd:base64Binary	A set of finite-length sequences of binary octets.			
		mimeCode	required	xsd:normalized-String	The mime type of the binary object.
		characterSetCode	optional	xsd:normalized-String	The character set of the binary object if the mime type is text.
		encodingCode	optional	xsd:normalized-String	Specifies the decoding algorithm of the binary object.
		filename	optional	xsd:string	The filename of the binary object.
		format	optional	xsd:string	The format of the binary content.
		uri	optional	xsd:anyURI	The Uniform Resource Identifier that identifies where the binary object is located.
Code	xsd:normalized-String	A character string (letters, figures, or symbols) that for brevity and/or language independence may be used to represent or replace a definitive value or text of an attribute, together with relevant supplementary information.			
		languageID	optional	xsd:language	The identifier of the language used in the code name.
		listAgencyID	optional	xsd:normalized-String	An agency that maintains one or more lists of codes.
		listAgencyName	optional	xsd:string	The name of the agency that maintains the list of codes.
		listID	optional	xsd:normalized-String	The identification of a list of codes.
		listName	optional	xsd:string	The name of a list of codes.
		listSchemeURI	optional	xsd:anyURI	The Uniform Resource Identifier that identifies where the code list scheme is located.
		listURI	optional	xsd:anyURI	The Uniform Resource Identifier that identifies where the code list is located.
		listVersionID	optional	xsd:normalized-String	The version of the list of codes.

		name	optional	xsd:string	The textual equivalent of the code content component.
DateTime	xsd:dateTime	An instance of time according the Gregorian calendar.			
Date	xsd:date	One calendar day according the Gregorian calendar.			
Time	xsd:time	An instance of time that occurs every day.			
Identifier	xsd:normalized-String	A character string to identify and uniquely distinguish one instance of an object in an identification scheme from all other objects in the same scheme, together with relevant supplementary information.			
		schemeAgency-ID	optional	xsd:normalized-String	The identification of the agency that maintains the identification scheme.
		schemeAgency-Name	optional	xsd:string	The name of the agency that maintains the identification scheme.
		schemeDataURI	optional	xsd:anyURI	The Uniform Resource Identifier that identifies where the identification scheme data is located.
		schemeID	optional	xsd:normalized-String	The identification of the identification scheme.
		schemeName	optional	xsd:string	The name of the identification scheme.
		schemeURI	optional	xsd:anyURI	The Uniform Resource Identifier that identifies where the identification scheme is located.
		schemeVersionID	optional	xsd:normalized-String	The version of the identification scheme.
Indicator	xsd:boolean	A list of two mutually exclusive Boolean values that express the only possible states of a property.			
Measure	xsd:decimal	A numeric value determined by measuring an object using a specified unit of measure.			
		unitCode	required	xsd:normalized-String	The type of unit of measure.
		unitCodeListVersionID	optional	xsd:normalized-String	The version of the measure unit code list.
Numeric Value	xsd:decimal	Numeric information that is assigned or is determined by calculation, counting, or sequencing. It does not require a unit of quantity or unit of measure.			
		format	optional	xsd:string	Whether the number is an integer, decimal, real number or percentage.
Quantity	xsd:decimal	A counted number of non-monetary units, possibly including a fractional part.			
		unitCode	optional	xsd:normalized-String	The unit of the quantity
		unitCodeListAgencyID	optional	xsd:normalized-String	The identification of the agency that maintains the quantity unit code list

		unitCodeListAgencyName	optional	xsd:string	The name of the agency which maintains the quantity unit code list.
		unitCodeListID	optional	xsd:normalized-String	The quantity unit code list.
Text Name	xsd:string	A character string (i.e. a finite set of characters), generally in the form of words of a language.			
		languageID	optional	xsd:language	The identifier of the language used in the content component.
		languageLocaleID	optional	xsd:normalized-String	The identification of the locale of the language.

4.5 Content data type schemas

There are two content data type schema fragments, one for each of the extension content and the payload content. These are the only schemas intended to be edited by users should they wish to validate the content of their extensions or payloads. No changes are necessary to the schemas if it is not important to validate these portions of the document.

Should users wish to impose constraints on the extension or the payload contents, the only edits required of the content schema is the importation of the schemas to be engaged for validation purposes. No edits are required of the content element, though one may wish to do so to exclude content other than that for which schemas are provided.

4.5.1 Extension content

The extension content element's name is `<{extensions prefix}:ExtensionContent>`, for example, `<ext:ExtensionContent>`. It is the last element child of `<{extensions prefix}:BDEExtension>`.

Any given extension content may have as its child at most one apex (or top-most) element in the XML element tree. The absence of content is provided for situations where a processing application chooses to elide foreign unrecognized-namespace elements from the XML element tree.

4.5.2 Payload content

The payload content element's name is `<{aggregate prefix}:PayloadContent>`, for example, `<eac:PayloadContent>`. It is the last element child of `<{aggregate prefix}:Payload>`.

Any given payload content element may have as its child exactly one apex (or top-most) element in the XML element tree, or it may consist solely of text that would typically represent encrypted content or non-XML content. Special care must be taken that all non-XML payload content must be encoded according to XML text encoding rules, such as the escaping of special markup characters, so as to permit an XML processing application to correctly interpret the non-XML content.

The schema declarations are unable to prevent flagging the payload content having a combination of both text and a single element as a constraint error. Detecting such a condition is the responsibility of the processing agent.

The schema declarations are unable to prevent flagging the payload content having empty content as a constraint error. Detecting such a condition is the responsibility of the processing agent.

5 Conformance

A conforming instance is an instance that does not violate any document constraints expressed by the schemas.

In addition, the following instance constraints that cannot be detected as schema constraints must not be violated:

- every XML element that is not extension content is not allowed to be empty, and
- the `<{aggregate prefix}:PayloadContent>` element is not allowed to have a combination of text and an element (that is, it must either be a non-empty string of text or it must be a single element).

Appendix A Release notes (Non-Normative)

A.1 Availability

Online and downloadable versions of this release are available from the locations specified at the top of this document.

A.2 Package structure

This Committee Specification Draft 01 / Public Review Draft 01 is published as a zip archive in the <http://docs.oasis-open.org/bdxr/bdx-bde/v1.0/csprd01/> directory. Unzipping this archive creates a directory tree containing a number of files and subdirectories. Note that while the two XML files comprise the revisable version of this specification, this revisable XML may not be directly viewable in all currently available web browsers.

The base directory has the following files:

bdx-bde-v1.0-csprd01.xml
The revisable form of the document.

bdx-bde-v1.0-csprd01.html
An HTML rendering of the document.

bdx-bde-v1.0-csprd01.pdf
A PDF rendering of the document.

These are the subdirectories in the package:

art
Diagrams and illustrations used in this specification.

db
DocBook stylesheets for viewing in HTML the XML of this work product.

mod
The envelope document model in various formats.

val
Demonstrative validation of the example instances with the envelope schemas.
See [Appendix C, Demonstration environment \(Non-Normative\)](#) for details.

xsd
XML schema expressions complete with semantic documentation.

xsdrt
Runtime XML schema expressions void of semantic documentation.

Appendix B Acknowledgements (Non-Normative)

The following individuals have participated in the creation of this specification and are gratefully acknowledged:

Jens Aabol, Difi-Agency for Public Management and eGovernment
Oriol Bausa Peris, Individual
Kenneth Bengtsson, Alfa1lab
Kees Duvekot, RFS Holland Holding B.V.
Sander Fieten, Individual
G. Ken Holman, Crane Softwrights Ltd.
Ole Madsen, Danish Agency for Digitisation, Ministry of Finance
Sven Rasmussen, Danish Agency for Digitisation, Ministry of Finance

Appendix C Demonstration environment (Non-Normative)

A working example of using the schemas with an XML instance is demonstrated in the `val/` directory. This directory has a number of simple test files:

- **`simpleExample.xml`**
 - a simple envelope with three payload instances, the second of which is simple text (note the escaped special characters) and the other two of which are XML
- **`simpleExampleFailSyntax.xml`**
 - an envelope document with an XML well-formedness error (the end tag for the creation date and time is missing the closing right-angle bracket)
- **`simpleExampleFailModel.xml`**
 - an envelope document with an XML validity error (a misspelled element for the creation date and time)
- **`simpleExampleExtension.xml`**
 - a simple envelope with a user-defined extension adding information to the envelope
- **`simpleExampleSignedNotFinal.xml`**
 - a simple envelope digitally signed with a single signature in such a way that allows additional signatures to be embedded in the envelope
- **`simpleExampleSignedFinal.xml`**
 - a simple envelope digitally signed with a single signature in such a way that does not allow additional signatures to be embedded in the envelope
- **`simpleExampleSignedNotFinalAdditional.xml`**
 - a simple envelope digitally signed with two signatures, having added one to `simpleExampleSignedNotFinal.xml`
- **`simpleExampleSignedFinalAdditionalFail.xml`**
 - a simple envelope digitally signed with two signatures, having added one to `simpleExampleSignedFinal.xml`
 - the document validates against the BDE schemas, however digital signature verification software flags this as the final signature being invalid because additional information (the second signature) was added to the document
- **`simpleExampleSignedDetached.xml`**
 - the detached digital signature of `simpleExample.xml`, signed in such a way that allows additional signatures to be embedded in the envelope
 - this is an instance of the W3C digital signature vocabulary and is not an instance of the business document envelope, and so this is not validated as part of the test script

Note

The digital signatures in these test files are bona fide and can be verified with suitable digital signature software.

To invoke the schemas with the demonstration instances, navigate to the directory and invoke the test script:

- in Windows:

```
test.bat
```

- in shell:

```
sh test.sh
```

The result on the screen should appear as follows:

```
val $ sh test.sh

#####
Validating simpleExample.xml
#####
===== Phase 1: XSD schema validation =====
No schema validation errors.
===== Phase 2: XSLT code list validation =====
No code list validation errors.

#####
Validating simpleExampleFailSyntax.xml
#####
===== Phase 1: XSD schema validation =====
org.xml.sax.SAXParseException: The end-tag for element type
"ebc:CreationDateTime" must end with a '>' delimiter.
at org.apache.xerces.parsers.AbstractSAXParser.parse(Unknown Source)
at org.apache.xerces.jaxp.SAXParserImpl$JAXPSAXParser.parse(Unknown Source)
at org.apache.xerces.jaxp.SAXParserImpl.parse(Unknown Source)
at javax.xml.parsers.SAXParser.parse(SAXParser.java:277)
at com.nwalsh.parsers.XJParser.xsdParse(Unknown Source)
at com.nwalsh.parsers.XJParser.parse(Unknown Source)
at com.nwalsh.parsers.XJParser.run(Unknown Source)
at com.nwalsh.parsers.XJParser.main(Unknown Source)
Exception in thread "main" java.lang.NullPointerException
at com.nwalsh.parsers.XJParser.printParseStats(Unknown Source)
at com.nwalsh.parsers.XJParser.run(Unknown Source)
at com.nwalsh.parsers.XJParser.main(Unknown Source)
Attempting well-formed, namespace-aware parse
Fatal error:file:///Users/admin/t/artefacts-bdx-bde-v1.0-csd01wd01-test/
val/simpleExampleFailSyntax.xml:7:3:The end-tag for element type
"ebc:CreationDateTime" must end with a '>' delimiter.

#####
Validating simpleExampleFailModel.xml
#####
===== Phase 1: XSD schema validation =====
Attempting well-formed, namespace-aware parse
Error:file:///Users/admin/t/artefacts-bdx-bde-v1.0-csd01wd01-test/val/
```

```
simpleExampleFailModel.xml:6:26:cvc-complex-type.2.4.a: Invalid
content was found starting with element 'ebc:CreationDateTimex'. One
of '{"http://docs.oasis-open.org/bdxr/ns/bde/1.0/BasicComponents":
CreationDateTime}' is expected.
Parse succeeded (0.12) with 1 error and no warnings.
```

```
#####
Validating simpleExampleExtension.xml
#####
===== Phase 1: XSD schema validation =====
No schema validation errors.
===== Phase 2: XSLT code list validation =====
No code list validation errors.
```

```
#####
Validating simpleExampleSignedNotFinal.xml
#####
===== Phase 1: XSD schema validation =====
No schema validation errors.
===== Phase 2: XSLT code list validation =====
No code list validation errors.
```

```
#####
Validating simpleExampleSignedFinal.xml
#####
===== Phase 1: XSD schema validation =====
No schema validation errors.
===== Phase 2: XSLT code list validation =====
No code list validation errors.
```

```
#####
Validating simpleExampleSignedNotFinalAdditional.xml
#####
===== Phase 1: XSD schema validation =====
No schema validation errors.
===== Phase 2: XSLT code list validation =====
No code list validation errors.
```

```
#####
Validating simpleExampleSignedFinalAdditionalFail.xml
#####
===== Phase 1: XSD schema validation =====
No schema validation errors.
===== Phase 2: XSLT code list validation =====
No code list validation errors.
```

```
val $
```

The test script invokes the validation script using the following::

- in Windows:

```
validate.bat schema-file instance-file
```

- in shell:

```
sh validate.sh schema-file instance-file
```


The validation script invokes the schema script using the following:

- in Windows:

```
w3cschema.bat schema-file instance-file
```

- in shell:

```
sh w3cschema.sh schema-file instance-file
```

The validation script invokes the XSLT script using the following:

- in Windows:

```
xslt.bat instance-file stylesheet-file output-file
```

- in shell:

```
sh xslt.sh instance-file stylesheet-file output-file
```

The empty stylesheet **BDE-DefaultDTQ-1.0.xsl** is a placebo that would be replaced with an XSLT stylesheet imposing value validation constraint checking on a given instance of a business document envelope.

Appendix D Revision History (Non-Normative)

Revision	Date	Editor	Changes made
csd01wd01	09 February 2015	GKH	Initial version with business objects submitted by UBL Technical Committee
csd01wd02	14 February 2015	GKH	Revision to include additional constructs from BII specification
csd01wd03	17 February 2015	GKH	Document namespaces; use W3C DSig 1.1 schemas; remove reference to empty xml/ samples directory
csd01wd04	26 February 2015	GKH	Add class for relevant external references; remove primary instance indicator; update wording of requirements
csd01	04 March 2015	GKH	Cover page changes for CSD
csprd01	04 March 2015	GKH	Cover page changes for CSPRD