



Service Component Architecture Assembly Model Specification Version 1.1

Committee Draft 05

12 January 2010

Specification URIs:

This Version:

<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec-cd05.html>
<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec-cd05.doc>
<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec-cd05.pdf> (Authoritative)

Previous Version:

<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec-cd03.html>
<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec-cd03.doc>
<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec-cd03.pdf> (Authoritative)

Latest Version:

<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec.html>
<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec.doc>
<http://docs.oasis-open.org/opencsa/sca-assembly/sca-assembly-1.1-spec.pdf> (Authoritative)

Technical Committee:

OASIS Service Component Architecture / Assembly (SCA-Assembly) TC

Chair(s):

Martin Chapman, Oracle
Mike Edwards, IBM

Editor(s):

Michael Beisiegel, IBM
Khanderao Khand, Oracle
Anish Karmarkar, Oracle
Sanjay Patil, SAP
Michael Rowley, Active Endpoints

Related work:

This specification replaces or supercedes:

- Service Component Architecture Assembly Model Specification Version 1.00, March 15, 2007

This specification is related to:

- Service Component Architecture Policy Framework Specification Version 1.1

Declared XML Namespace(s):

<http://docs.oasis-open.org/ns/opencsa/sca/200912>

Abstract:

Service Component Architecture (SCA) provides a programming model for building applications and solutions based on a Service Oriented Architecture. It is based on the idea that business function is provided as a series of services, which are assembled together to create solutions that serve a particular business need. These composite applications can contain both new services created specifically for the application and also business function from existing systems and applications, reused as part of the composition. SCA provides a model both for the composition of services and for the creation of service components, including the reuse of existing application function within SCA composites.

SCA is a model that aims to encompass a wide range of technologies for service components and for the access methods which are used to connect them. For components, this includes not only different programming languages, but also frameworks and environments commonly used with those languages. For access methods, SCA compositions allow for the use of various communication and service access technologies that are in common use, including, for example, Web services, Messaging systems and Remote Procedure Call (RPC).

The SCA Assembly Model consists of a series of artifacts which define the configuration of an SCA Domain in terms of composites which contain assemblies of service components and the connections and related artifacts which describe how they are linked together.

This document describes the SCA Assembly Model, which covers

- A model for the assembly of services, both tightly coupled and loosely coupled
- A model for applying infrastructure capabilities to services and to service interactions, including Security and Transactions

Status:

This document was last revised or approved by the OASIS Service Component Architecture / Assembly (SCA-Assembly) TC on the above date. The level of approval is also listed above. Check the "Latest Version" or "Latest Approved Version" location noted above for possible later revisions of this document.

Technical Committee members should send comments on this specification to the Technical Committee's email list. Others should send comments to the Technical Committee by using the "Send A Comment" button on the Technical Committee's web page at <http://www.oasis-open.org/committees/sca-assembly/>.

For information on whether any patents have been disclosed that may be essential to implementing this specification, and any offers of patent licensing terms, please refer to the Intellectual Property Rights section of the Technical Committee web page (<http://www.oasis-open.org/committees/sca-assembly/ipr.php>).

The non-normative errata page for this specification is located at <http://www.oasis-open.org/committees/sca-assembly/>

Notices

Copyright © OASIS® 2005, ~~2009~~2010. All Rights Reserved.

All capitalized terms in the following text have the meanings assigned to them in the OASIS Intellectual Property Rights Policy (the "OASIS IPR Policy"). The full Policy may be found at the OASIS website.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to OASIS, except as needed for the purpose of developing any document or deliverable produced by an OASIS Technical Committee (in which case the rules applicable to copyrights, as set forth in the OASIS IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by OASIS or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and OASIS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

OASIS requests that any OASIS Party or any other party that believes it has patent claims that would necessarily be infringed by implementations of this OASIS Committee Specification or OASIS Standard, to notify OASIS TC Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification.

OASIS invites any party to contact the OASIS TC Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this specification by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification. OASIS may include such claims on its website, but disclaims any obligation to do so.

OASIS takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on OASIS' procedures with respect to rights in any document or deliverable produced by an OASIS Technical Committee can be found on the OASIS website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this OASIS Committee Specification or OASIS Standard, can be obtained from the OASIS TC Administrator. OASIS makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

The names "OASIS", ~~[insert specific trademarked names and abbreviations here]~~ "SCA" and "Service Component Architecture" are trademarks of OASIS, the owner and developer of this specification, and should be used only to refer to the organization and its official outputs. OASIS welcomes reference to, and implementation and use of, specifications, while reserving the right to enforce its marks against misleading uses. Please see <http://www.oasis-open.org/who/trademark.php> for above guidance.

Table of Contents

Committee Draft 05	1
Notices	3
Table of Contents	4
1 Introduction	8
1.1 Terminology	8
1.2 Normative References	8
1.3 Naming Conventions	10
2 Overview	12
2.1 Diagram used to Represent SCA Artifacts	13
3 Implementation and ComponentType	16
3.1 Component Type	16
3.1.1 Service	17
3.1.2 Reference	19
3.1.3 Property	20
3.1.4 Implementation	22
3.2 Example ComponentType	22
3.3 Example Implementation	23
4 Component	26
4.1 Implementation	27
4.2 Service	28
4.3 Reference	30
4.3.1 Specifying the Target Service(s) for a Reference	33
4.4 Property	35
4.4.1 Property Type Compatibility	39
4.5 Example Component	39
5 Composite	43
5.1 Service	45
5.1.1 Service Examples	46
5.2 Reference	48
5.2.1 Example Reference	51
5.3 Property	53
5.3.1 Property Examples	54
5.4 Wire	56
5.4.1 Wire Examples	59
5.4.2 Autowire	61
5.4.3 Autowire Examples	62
5.5 Using Composites as Component Implementations	65
5.5.1 Component Type of a Composite used as a Component Implementation	66
5.5.2 Example of Composite used as a Component Implementation	68
5.6 Using Composites through Inclusion	69
5.6.1 Included Composite Examples	70
5.7 Composites which Contain Component Implementations of Multiple Types	73
5.8 Structural URI of Components	73

6	Interface.....	78
6.1	Local and Remotable Interfaces.....	79
6.2	Interface Compatibility	80
6.2.1	Compatible Interfaces	80
6.2.2	Compatible Subset.....	80
6.2.3	Compatible Superset.....	81
6.3	Bidirectional Interfaces	82
6.4	Long-running Request-Response Operations.....	83
6.4.1	Background	83
6.4.2	Definition of "long-running".....	83
6.4.3	The asyncInvocation Intent	84
6.4.4	Requirements on Bindings	84
6.4.5	Implementation Type Support	84
6.5	SCA-Specific Aspects for WSDL Interfaces.....	84
6.6	WSDL Interface Type	85
6.6.1	Example of interface.wsdl	86
7	Binding.....	88
7.1	Messages containing Data not defined in the Service Interface	90
7.2	WireFormat	90
7.3	OperationSelector	91
7.4	Form of the URI of a Deployed Binding.....	91
7.4.1	Non-hierarchical URIs	91
7.4.2	Determining the URI scheme of a deployed binding.....	92
7.5	SCA Binding	92
7.5.1	Example SCA Binding	94
7.6	Web Service Binding	94
7.7	JMS Binding.....	94
8	SCA Definitions	95
9	Extension Model.....	96
9.1	Defining an Interface Type.....	96
9.2	Defining an Implementation Type.....	97
9.3	Defining a Binding Type.....	99
9.4	Defining an Import Type	101
9.5	Defining an Export Type	103
10	Packaging and Deployment	105
10.1	Domains.....	105
10.2	Contributions.....	105
10.2.1	SCA Artifact Resolution.....	106
10.2.2	SCA Contribution Metadata Document	109
10.2.3	Contribution Packaging using ZIP	111
10.3	States of Artifacts in the Domain	111
10.4	Installed Contribution	112
10.4.1	Installed Artifact URIs.....	112
10.5	Operations for Contributions.....	112
10.5.1	install Contribution & update Contribution.....	112

10.5.2 add Deployment Composite & update Deployment Composite.....	113
10.5.3 remove Contribution	113
10.6 Use of Existing (non-SCA) Mechanisms for Resolving Artifacts	113
10.7 Domain-Level Composite	114
10.7.1 add To Domain-Level Composite.....	114
10.7.2 remove From Domain-Level Composite	115
10.7.3 get Domain-Level Composite	115
10.7.4 get QName Definition	115
10.8 Dynamic Behaviour of Wires in the SCA Domain.....	115
10.9 Dynamic Behaviour of Component Property Values	116
11 SCA Runtime Considerations.....	118
11.1 Error Handling.....	118
11.1.1 Errors which can be Detected at Deployment Time.....	118
11.1.2 Errors which are Detected at Runtime	118
12 Conformance	120
12.1 SCA Documents	120
12.2 SCA Runtime	121
12.2.1 Optional Items	121
A. XML Schemas	122
A.1 sca.xsd	122
A.2 sca-core.xsd	122
A.3 sca-binding-sca.xsd.....	132
A.4 sca-interface-java.xsd	133
A.5 sca-interface-wsdl.xsd.....	133
A.6 sca-implementation-java.xsd.....	133
A.7 sca-implementation-composite.xsd	133
A.8 sca-binding-webservice.xsd	134
A.9 sca-binding-jms.xsd.....	134
A.10 sca-policy.xsd	134
A.11 sca-contribution.xsd	134
A.12 sca-definitions.xsd.....	136
B. SCA Concepts	137
B.1 Binding.....	137
B.2 Component.....	137
B.3 Service.....	137
B.3.1 Remotable Service.....	137
B.3.2 Local Service.....	138
B.4 Reference	138
B.5 Implementation	138
B.6 Interface.....	138
B.7 Composite	139
B.8 Composite inclusion	139
B.9 Property	139
B.10 Domain	139
B.11 Wire	139

C.	Conformance Items	141
C.1	Mandatory Items	141
C.2	Non-mandatory Items.....	154
D.	Acknowledgements	156
E.	Non-Normative Text	158
F.	Revision History.....	159

1 Introduction

This document describes the **SCA Assembly Model, which** covers

- A model for the assembly of services, both tightly coupled and loosely coupled
- A model for applying infrastructure capabilities to services and to service interactions, including Security and Transactions

The document starts with a short overview of the SCA Assembly Model.

The next part of the document describes the core elements of SCA, SCA components and SCA composites.

The final part of the document defines how the SCA assembly model can be extended.

This specification is defined in terms of Infoset and not in terms of XML 1.0, even though the specification uses XML 1.0 terminology. A mapping from XML to infoset is trivial and it is suggested that this is used for any non-XML serializations.

1.1 Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

1.2 Normative References

[RFC2119]

S. Bradner, *Key words for use in RFCs to Indicate Requirement Levels*,

[IETF RFC 2119, March 1997.](#)

<http://www.ietf.org/rfc/rfc2119.txt>, ~~IETF RFC 2119, March 1997.~~

[SCA-Java]

[OASIS Committee Draft 01, "SCA Java POJO Component Implementation Specification Version 1.1", May 2009](#)

<http://www.docs.oasis-open.org/apps/org/workgroup/opencsa/sca-j/download.php/31447/sca-javaci-1.1-spec-wd03cd01.pdf>

[SCA-Common-Java]

[OASIS Committee Draft 03, "SCA Java Common Annotations and APIs Specification Version 1.1", May 2009](#)

<http://www.docs.oasis-open.org/apps/org/workgroup/opencsa/sca-j/download.php/31427/sca-javacaa-1.1-spec-cd02cd03.pdf>

[SCA BPEL]

[OASIS Committee Draft 02, "SCA WS-BPEL Client and Implementation Specification Version 1.1", March 2009](#)

<http://docs.oasis-open.org/opencsa/sca-bpel/sca-bpel-1.1-spec-cd-0402.pdf>

41 **[SDO] ~~SDO~~**

42 OASIS Committee Draft 02, "Service Data Objects Specification Version 3.0", November 2009
43 <http://www.osoa.org/download/attachments/36/Java-SDO-Spec-v2.1.0-FINAL.pdf>[http://docs.oasis-](http://docs.oasis-open.org/opencsa/sdo/sd0-core-3.0-spec-cd02.pdf)
44 [open.org/opencsa/sdo/sd0-core-3.0-spec-cd02.pdf](http://docs.oasis-open.org/opencsa/sdo/sd0-core-3.0-spec-cd02.pdf)

45
46 ~~[3] SCA Example Code document~~

47
48
49 **[JAX-WS]**

50 JAX-WS Specification

51 http://www.osoa.org/download/attachments/28/SCA_BuildingYourFirstApplication_V09.pdf[http://jcp.or](http://jcp.org/en/jsr/detail?id=224)
52 [g/en/jsr/detail?id=224](http://jcp.org/en/jsr/detail?id=224)

53
54 **[4] ~~JAX-WS Specification~~ WSI-BP]**

55 <http://jcp.org/en/jsr/detail?id=101>

56
57 ~~[5] WS-I Basic Profile~~

58 <http://www.ws-i.org/deliverables/workinggroup.aspx?wg=basicprofile>

59
60 **[6] ~~WSI-BSP~~**

61 WS-I Basic Security Profile

62 <http://www.ws-i.org/deliverables/workinggroup.aspx?wg=basicsecurity>

63
64 **[7] ~~WS-BPEL~~**

65 OASIS Standard, "Web Services Business Process Execution Language (~~BPEL~~) Version 2.0"

66 [http://www.docs.oasis-open.org/committees/documents.php?wg_abbrev=wsbpel/2.0/OS/wsbpel-v2.0-](http://www.docs.oasis-open.org/committees/documents.php?wg_abbrev=wsbpel/2.0/OS/wsbpel-v2.0-OS.pdf)
67 [OS.pdf](http://www.docs.oasis-open.org/committees/documents.php?wg_abbrev=wsbpel/2.0/OS/wsbpel-v2.0-OS.pdf)

68
69 **[8] ~~WSDL-11~~**

70 WSDL Specification version 1.1

71 WSDL 1.1: <http://www.w3.org/TR/wSDL>

72 WSDL 2.0:

73 **[SCA-WSBINDING]**

74 OASIS Committee Draft 03, "SCA Web Services Binding Specification Version 1.1", July 2009

75 [http://www.w3docs.oasis-open.org/TR/wsd20/opencsa/sca-bindings/sca-wsbinding-1.1-spec-](http://www.w3docs.oasis-open.org/TR/wsd20/opencsa/sca-bindings/sca-wsbinding-1.1-spec-cd03.pdf)
76 [cd03.pdf](http://www.w3docs.oasis-open.org/TR/wsd20/opencsa/sca-bindings/sca-wsbinding-1.1-spec-cd03.pdf)

77
78 ~~[9] SCA Web Services Binding Specification~~

79
80
81 **[SCA-POLICY]**

82 OASIS Committee Draft 02, "SCA Policy Framework Specification Version 1.1", February 2009

<http://docs.oasis-open.org/opencsa/sca-bindingspolicy/sca-wsbindingpolicy-1.1-spec-ed04-cd02.pdf>

[10] SCA Policy Framework JMSBINDING]

OASIS Committee Draft 03, "SCA JMS Binding Specification Version 1.1 Version 1.1", July 2009

<http://docs.oasis-open.org/opencsa/sca-policybindings/sca-policyjmsbinding-1.1-spec-cd-0403.pdf>

~~[11]~~

[SCA JMS Binding CPP Client]

OASIS Committee Draft 04, "SCA Client and Implementation for C++ Specification Version 1.1", March 2009

<http://docs.oasis-open.org/opencsa/sca-bindingsc-cpp/sca-jmsbindingcppcni-1.1-spec-ed04-cd04.pdf>

[SCA CPP Client]

OASIS Committee Draft 03, "SCA C++ Client and Implementation for C Specification Version 1.1", March 2009

<http://docs.oasis-open.org/opencsa/sca-c-cpp/sca-cppcni-1.1-spec-cd-0404.pdf>

[SCA C Client] SCA C Client and Implementation Specification ZIP-FORMAT]

<http://docs.oasis-open.org/opencsa/sca-c-cpp/sca-ccni-1.1-spec-cd-01.pdf>

~~[12]~~ ZIP Format Definition

<http://www.pkware.com/documents/casestudies/APPNOTE.TXT>

[13] XML-INFOSET]

InfoSet Specification

<http://www.w3.org/TR/xml-infoset/>

[WSDL11_Identifiers]

WSDL 1.1 Element Identifiers

<http://www.w3.org/TR/wsdl11elementidentifiers/>

1.3 Naming Conventions

This specification follows some naming conventions for artifacts defined by the specification, as follows:

- 120 | • For the names of elements and the names of attributes within XSD files, the names follow the
121 CamelCase convention, with all names starting with a lower case letter.
122 e.g. <element name="componentType" type="sca:ComponentType"/>
- 123 | • For the names of types within XSD files, the names follow the CamelCase convention with all names
124 starting with an upper case letter.
125 eg. <complexType name="ComponentService">
- 126 | • For the names of intents, the names follow the CamelCase convention, with all names starting with a
127 lower case letter, EXCEPT for cases where the intent represents an established acronym, in which
128 case the entire name is in upper case.
129 An example of an intent which is an acronym is the "SOAP" intent.

2 Overview

Service Component Architecture (SCA) provides a programming model for building applications and solutions based on a Service Oriented Architecture. It is based on the idea that business function is provided as a series of services, which are assembled together to create solutions that serve a particular business need. These composite applications can contain both new services created specifically for the application and also business function from existing systems and applications, reused as part of the composition. SCA provides a model both for the composition of services and for the creation of service components, including the reuse of existing application function within SCA composites.

SCA is a model that aims to encompass a wide range of technologies for service components and for the access methods which are used to connect them. For components, this includes not only different programming languages, but also frameworks and environments commonly used with those languages. For access methods, SCA compositions allow for the use of various communication and service access technologies that are in common use, including, for example, Web services, Messaging systems and Remote Procedure Call (RPC).

The SCA **Assembly Model** consists of a series of artifacts which define the configuration of an SCA Domain in terms of composites which contain assemblies of service components and the connections and related artifacts which describe how they are linked together.

One basic artifact of SCA is the **component**, which is the unit of construction for SCA. A component consists of a configured instance of an implementation, where an implementation is the piece of program code providing business functions. The business function is offered for use by other components as **services**. Implementations can depend on services provided by other components – these dependencies are called **references**. Implementations can have settable **properties**, which are data values which influence the operation of the business function. The component **configures** the implementation by providing values for the properties and by wiring the references to services provided by other components.

SCA allows for a wide variety of implementation technologies, including "traditional" programming languages such as Java, C++, and BPEL, but also scripting languages such as PHP and JavaScript and declarative languages such as XQuery and SQL.

SCA describes the content and linkage of an application in assemblies called **composites**. Composites can contain components, services, references, property declarations, plus the wiring that describes the connections between these elements. Composites can group and link components built from different implementation technologies, allowing appropriate technologies to be used for each business task. In turn, composites can be used as complete component implementations: providing services, depending on references and with settable property values. Such composite implementations can be used in components within other composites, allowing for a hierarchical construction of business solutions, where high-level services are implemented internally by sets of lower-level services. The content of composites can also be used as groupings of elements which are contributed by inclusion into higher-level compositions.

Composites are deployed within an **SCA Domain**. An SCA Domain typically represents a set of services providing an area of business functionality that is controlled by a single organization. As an example, for the accounts department in a business, the SCA Domain might cover all financial related function, and it might contain a series of composites dealing with specific areas of accounting, with one for customer accounts, another dealing with accounts payable. To help build and configure the SCA Domain, composites can be used to group and configure related artifacts.

SCA defines an XML file format for its artifacts. These XML files define the portable representation of the SCA artifacts. An SCA runtime might have other representations of the artifacts represented by these XML files. In particular, component implementations in some programming languages might have attributes or properties or annotations which can specify some of the elements of the SCA Assembly model. The XML files define a static format for the configuration of an SCA Domain. An SCA runtime might also allow for the configuration of the Domain to be modified dynamically.

2.1 Diagram used to Represent SCA Artifacts

This document introduces diagrams to represent the various SCA artifacts, as a way of visualizing the relationships between the artifacts in a particular assembly. These diagrams are used in this document to accompany and illuminate the examples of SCA artifacts and do not represent any formal graphical notation for SCA.

The following picture [Figure 2-1](#) illustrates some of the features of an SCA component:

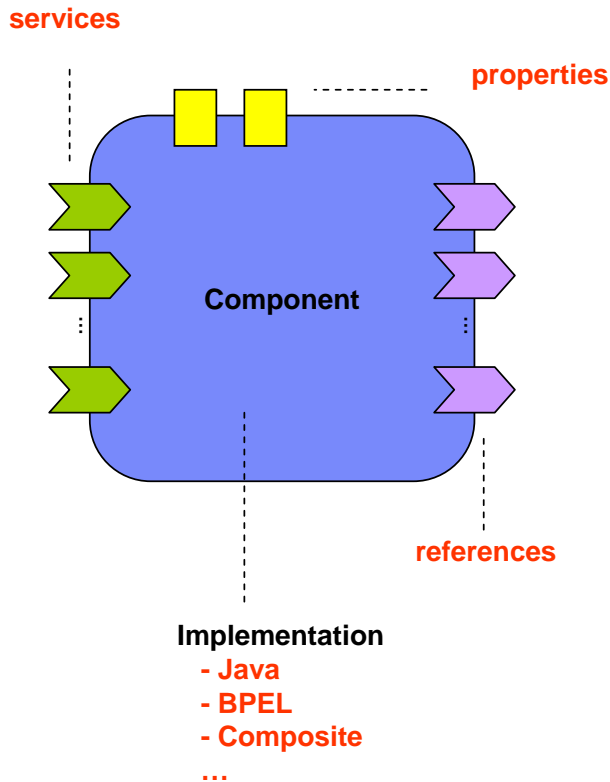


Figure 422-1: SCA Component Diagram

The following picture [Figure 2-2](#) illustrates some of the features of a composite assembled using a set of components:

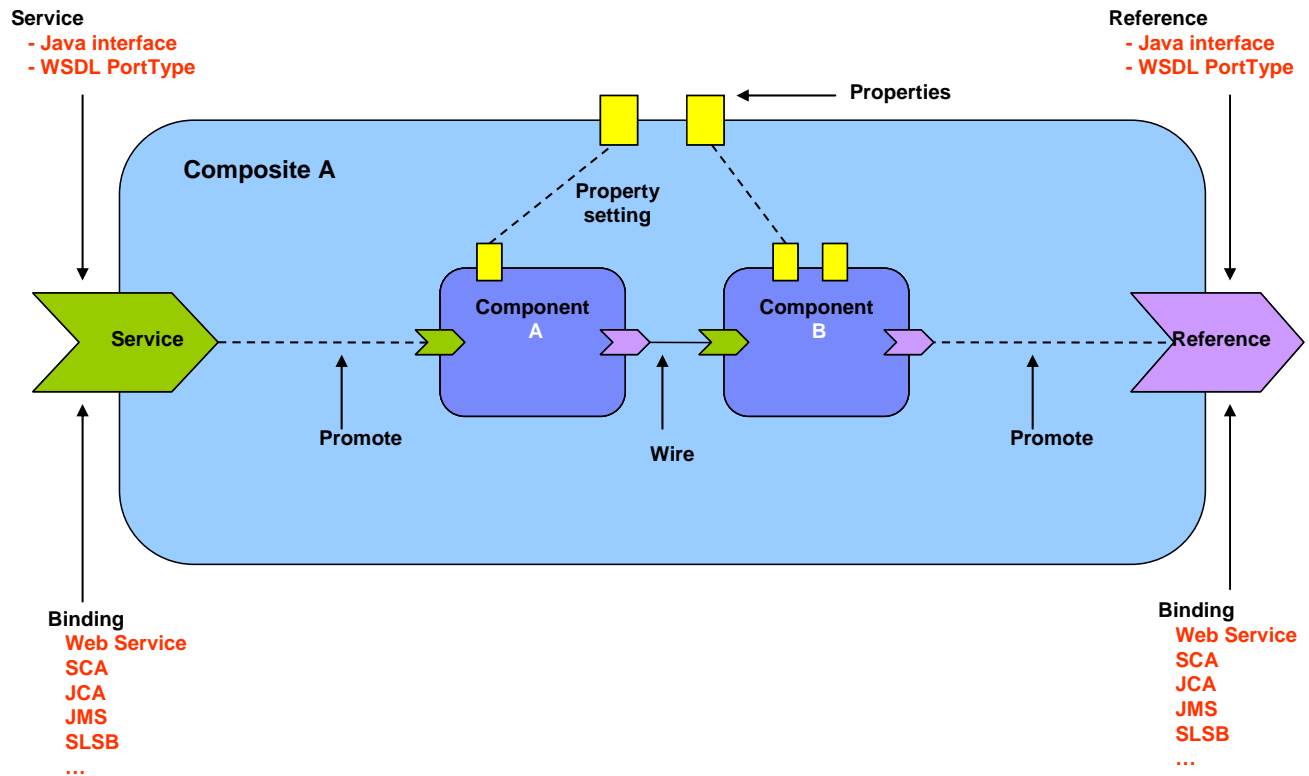


Figure 222-2: SCA Composite Diagram

The following pictureFigure 2-3Figure 2-3 illustrates an SCA Domain assembled from a series of high-level composites, some of which are in turn implemented by lower-level composites:

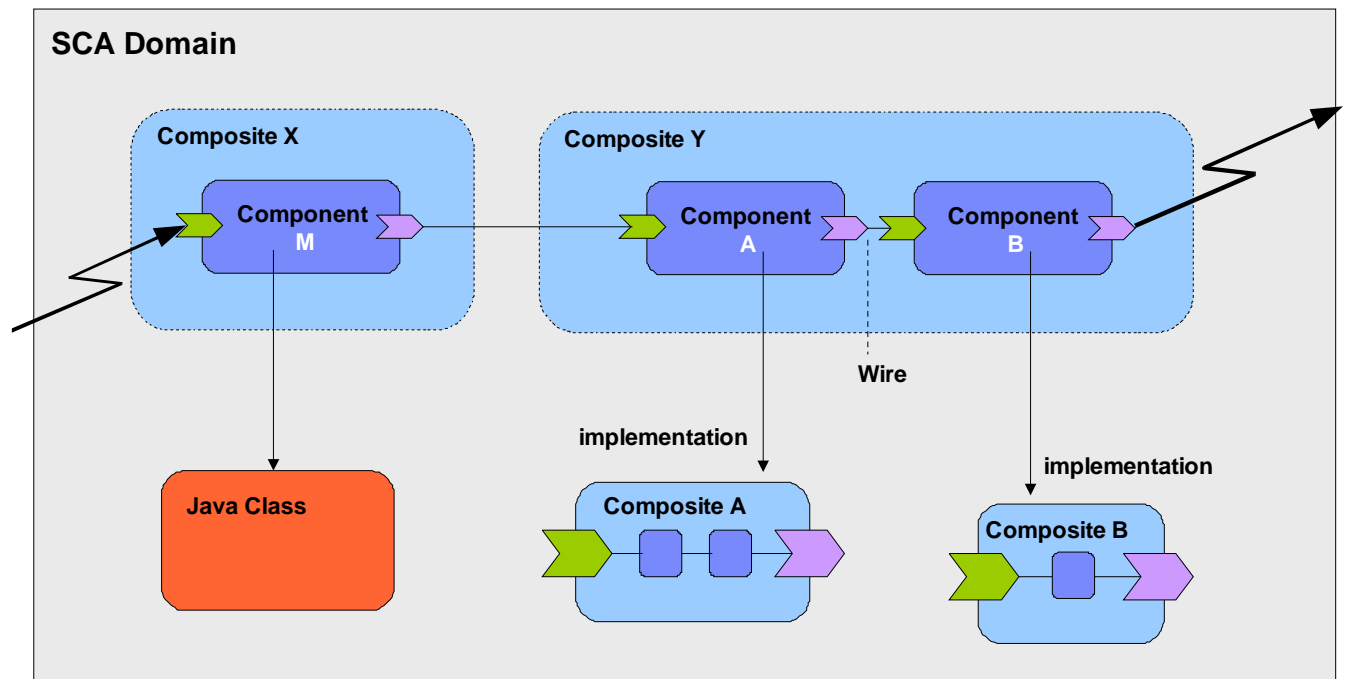


Figure 322-3: SCA Domain Diagram

3 Implementation and ComponentType

Component **implementations** are concrete implementations of business function which provide services and/or which make references to services provided elsewhere. In addition, an implementation can have some settable property values.

SCA allows a choice of any one of a wide range of **implementation types**, such as Java, BPEL or C++, where each type represents a specific implementation technology. The technology might not simply define the implementation language, such as Java, but might also define the use of a specific framework or runtime environment. Examples include SCA Composite, Java implementations done using the Spring framework or the Java EE EJB technology.

Services, references and properties are the **configurable aspects of an implementation**. SCA refers to them collectively as the **component type**.

Depending on the implementation type, the implementation can declare the services, references and properties that it has and it also might be able to set values for all the characteristics of those services, references and properties.

So, for example:

- for a service, the implementation might define the interface, binding(s), a URI, intents, and policy sets, including details of the bindings
- for a reference, the implementation might define the interface, binding(s), target URI(s), intents, policy sets, including details of the bindings
- for a property the implementation might define its type and a default value
- the implementation itself might define policy intents or concrete policy sets

The means by which an implementation declares its services, references and properties depend on the type of the implementation. For example, some languages like Java, provide annotations which can be used to declare this information inline in the code.

Most of the characteristics of the services, references and properties can be overridden by a component that uses and configures the implementation, or the component can decide not to override those characteristics. Some characteristics cannot be overridden, such as intents. Other characteristics, such as interfaces, can only be overridden in particular controlled ways (see [the Component section](#) for details).

3.1 Component Type

Component type represents the configurable aspects of an implementation. A component type consists of services that are offered, references to other services that can be wired and properties that can be set. The settable properties and the settable references to services are configured by a component that uses the implementation.

An implementation type specification (for example, the WS-BPEL Client and Implementation Specification Version 1.1 [SCA BPEL]) specifies the mechanism(s) by which the component type associated with an implementation of that type is derived.

Since SCA allows a broad range of implementation technologies, it is expected that some implementation technologies (for example, the Java Component Implementation Specification Version 1.1 [SCA-Java]) allow for introspecting the implementation artifact(s) (for example, a Java class) to derive the component type information. Other implementation technologies might not allow for introspection of the implementation artifact(s). In those cases where introspection is not allowed, SCA encourages the use of a SCA component type side file. A **component type side file** is an XML file whose document root element is `sca:componentType`.

The implementation type specification defines whether introspection is allowed, whether a side file is allowed, both are allowed or some other mechanism specifies the component type. The component type information derived through introspection is called the **introspected component type**. In any case, the implementation type specification specifies how multiple sources of information are combined to produce the **effective component type**. The effective component type is the component type metadata that is presented to the using component for configuration.

The extension of a componentType side file name MUST be .componentType. [ASM40001] The name and location of a componentType side file, if allowed, is defined by the implementation type specification.

If a component type side file is not allowed for a particular implementation type, the effective component type and introspected component type are one and the same for that implementation type.

For the rest of this document, when the term 'component type' is used it refers to the 'effective component type'.

The following snippet Snippet 3-1 Snippet 3-1 shows the componentType pseudo-schema:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Component type schema snippet -->

<componentType xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903"
  constrainingType="xs:QName"? 200912">

  <service ... />*
  <reference ... />*
  <property ... />*
  <implementation ... />?

</componentType>
```

The **componentType** element has the following **attribute**:

- **constrainingType : QName (0..1)** – If present, the @constrainingType attribute of a **<componentType/>** element MUST reference a **<constrainingType/>** element in the Domain through its QName. [ASM40002] When specified, the set of services, references and properties of the implementation, plus related intents, is constrained to the set defined by the constrainingType. See the ConstrainingType Section for more details.

The **componentType** element has the following **child elements**:

Snippet 33-1: componentType Pseudo-Schema

The **componentType** element has the **child elements**:

- **service : Service (0..n)** – see component type service section.
- **reference : Reference (0..n)** – see component type reference section.
- **property : Property (0..n)** – see component type property section.
- **implementation : Implementation (0..1)** – see component type implementation section.

3.1.1 Service

A **Service** represents an addressable interface of the implementation. The service is represented by a **service element** which is a child of the componentType element. There can be **zero or more** service elements in a componentType. The following snippet Snippet 3-2 Snippet 3-2 shows the

~~component type~~ `componentType` ~~pseudo~~-schema with the ~~pseudo~~-schema for a service child element:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Component type service schema snippet -->
<componentType xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
... >

  <service name="xs:NCName"
    requires="list of xs:QName"? policySets="list of xs:QName"?*>
    <interface ... />
    <binding ... />*
    <callback?>
      <binding ... />+
    </callback>
    <requires/>*
    <policySetAttachment/>*
  </service>

  <reference ... />*
  <property ... />*
  <implementation ... />?
</componentType>
```

Snippet 33-2: `componentType` Pseudo-Schema with service Child Element

The **service** element has the following attributes:

- **name : NCName (1..1)** - the name of the service. The @name attribute of a `<service/>` child element of a `<componentType/>` MUST be unique amongst the service elements of that `<componentType/>`. [ASM40003]
- **requires : QNameListOfQNames (0..n1)** - a list of policy intents. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.
- **policySets : QNameListOfQNames (0..n1)** - a list of policy sets. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.

The **service** element has the following child elements:

- **interface : Interface (1..1)** - A service has **one interface**, which describes the operations provided by the service. For details on the interface element see the Interface section.
- **binding : Binding (0..n)** - A service element has **zero or more binding elements** as children. If the binding element is not present it defaults to `<binding.sca>`. Details of the binding element are described in the Bindings section.
- **callback (0..1) / binding : Binding (1..n)** - A **callback** element is used if the interface has a callback defined, and the callback element has one or more **binding** elements as subelements. The **callback** and its binding subelements are specified if there is a need to have binding details used to handle callbacks. If the callback element is not present, the behaviour is runtime implementation dependent. For details on callbacks, see the Bidirectional Interfaces section.
- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

3.1.2 Reference

A **Reference** represents a requirement that the implementation has on a service provided by another component. The reference is represented by a **reference element** which is a child of the **componentType** element. There can be **zero or more** reference elements in a component type definition. ~~The following snippet~~[Snippet 3-3](#) shows the ~~component type~~[componentType pseudo](#)-schema with the ~~pseudo~~-schema for a reference child element:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Component type reference schema snippet -->
<componentType xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
... >

  <service ... />*

  <reference name="xs:NCName"
            autowire="xs:boolean"?
            multiplicity="0..1 or 1..1 or 0..n or 1..n"?
            wiredByImpl="xs:boolean"?
            requires="list of xs:QName"?
            policySets="list of xs:QName"?*>
    <interface ... />
    <binding ... />*
    <callback?>
      <binding ... />+
    </callback>
    <requires/>*
    <policySetAttachment/>*
  </reference>

  <property ... />*
  <implementation ... />?
</componentType>
```

[Snippet 33-3: componentType Pseudo-Schema with reference Child Element](#)

The **reference** element has the ~~following~~**attributes**:

- **name : NCName (1..1)** - the name of the reference. The @name attribute of a <reference/> child element of a <componentType/> MUST be unique amongst the reference elements of that <componentType/>. [\[ASM40004\]](#)
- **multiplicity : 0..1/1..1/0..n/1..n (0..1)** - defines the number of wires that can connect the reference to target services. The multiplicity can have the following values
 - ☞ 0..1 – zero or one wire can have the reference as a source
 - ☞ 1..1 – one wire can have the reference as a source
 - ☞ 0..n - zero or more wires can have the reference as a source
 - ☞ 1..n – one or more wires can have the reference as a sourceIf @multiplicity is not specified, the default value is "1..1".
- **autowire : boolean (0..1)** - whether the reference is autowired, as described in [the Autowire section](#). Default is false.
- **wiredByImpl : boolean (0..1)** - a boolean value, "false" by default. If set to "false", the reference is wired to the target(s) configured on the reference. If set to "true" it indicates that the target of the reference is set at runtime by the implementation code (e.g. by the code obtaining an endpoint reference by some means and setting this as the target of the reference through the use of

programming interfaces defined by the relevant Client and Implementation specification). If `@wiredByImpl` is set to "true", then any reference targets configured for this reference MUST be ignored by the runtime. [ASM40006]

- **requires** : *QName*listOf*QNames* (0..n1) - a list of policy intents. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.
- **policySets** : *QName*listOf*QNames* (0..n1) - a list of policy sets. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.

The **reference** element has the following child elements:

- **interface** : *Interface* (1..1) - A reference has **one interface**, which describes the operations used by the reference. The interface is described by an **interface element** which is a child element of the reference element. For details on the interface element see the Interface section.
- **binding** : *Binding* (0..n) - A reference element has **zero or more binding elements** as children. Details of the binding element are described in the Bindings section.

When used with a reference element, a binding element specifies an endpoint which is the target of that binding. A reference cannot mix the use of endpoints specified via binding elements with target endpoints specified via the `@target` attribute. If the `@target` attribute is set, the reference cannot also have binding subelements. If binding elements with endpoints are specified, each endpoint uses the binding type of the binding element in which it is defined.

- **callback** (0..1) / **binding** : *Binding* (1..n) - a **callback** element is used if the interface has a callback defined and the callback element has one or more **binding** elements as subelements. The **callback** and its binding subelements are specified if there is a need to have binding details used to handle callbacks. If the callback element is not present, the behaviour is runtime implementation dependent. For details on callbacks, see the Bidirectional Interfaces section.
- **requires** : *requires* (0..n) - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment** : *policySetAttachment* (0..n) - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

For a full description of the setting of target service(s) for a reference, see the section "Specifying the Target Service(s) for a Reference".

3.1.3 Property

Properties allow for the configuration of an implementation with externally set values. Each Property is defined as a property element. The `componentType` element can have **zero or more property elements** as its children. The following snippet [Snippet 3-4] shows the `componentType-componentType` pseudo-schema with the pseudo-schema for a reference child element:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Component type property schema snippet -->
<componentType xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
... >

  <service ... />*
  <reference ... >*</reference>

  <property name="xs:NCName" (type="xs:QName" | element="xs:QName")
    <!-- many="xs:boolean"? mustSupply="xs:boolean"?
    <!-- requires="list-of xs:QName"?
    <!-- policySets="list-of xs:QName"?>*
    <!-- default-property-value?
  </property>
</componentType>
```

```

445     </property>
446
447     <implementation ... />?
448
449 </componentType>

```

Snippet 33-4: componentType Pseudo-Schema with property Child Element

The **property** element has the ~~following attributes~~:

- **name : NCName (1..1)** - the name of the property. The @name attribute of a <property/> child element of a <componentType/> MUST be unique amongst the property elements of that <componentType/>. [ASM40005]
- one of (1..1):
 - ⊖ **type : QName** - the type of the property defined as the qualified name of an XML schema type. The value of the property @type attribute MUST be the QName of an XML schema type. [ASM40007]
 - ⊖ **element : QName** - the type of the property defined as the qualified name of an XML schema global element – the type is the type of the global element. The value of the property @element attribute MUST be the QName of an XSD global element. [ASM40008]

A single property element MUST NOT contain both a @type attribute and an @element attribute. [ASM40010]
- **many : boolean (0..1)** - whether the property is single-valued (false) or multi-valued (true). In the case of a multi-valued property, it is presented to the implementation as a collection of property values. If many is not specified, it takes a default value of false.
- **mustSupply : boolean (0..1)** - whether the property value needs to be supplied by the component that uses the implementation. Default value is "false". When the componentType has @mustSupply="true" for a property element, a component using the implementation MUST supply a value for the property since the implementation has no default value for the property. [ASM40011] If the implementation has a default-property-value then @mustSupply="false" is appropriate, since the implication of a default value is that it is used when a value is not supplied by the using component.
- **file : anyURI (0..1)** - a dereferencable URI to a file containing a value for the property.
 - ~~*requires : QName (0..n) - a list of policy intents. See the Policy Framework specification [10] for a description of this attribute.~~
 - ~~*policySets : QName (0..n) - a list of policy sets. See the Policy Framework specification [10] for a description of this attribute.~~

The property element can contain a default property value as its content. The form of the default property value is as described in the section on Component Property.

The value for a property is supplied to the implementation of a component at the time that the implementation is started. The implementation can use the supplied value in any way that it chooses. In particular, the implementation can alter the internal value of the property at any time. However, if the implementation queries the SCA system for the value of the property, the value as defined in the SCA composite is the value returned.

The componentType property element can contain an SCA default value for the property declared by the implementation. However, the implementation can have a property which has an implementation defined default value, where the default value is not represented in the componentType. An example of such a default value is where the default value is computed at runtime by some code contained in the implementation. If a using component needs to control the value of a property used by an implementation, the component sets the value explicitly. The SCA runtime MUST ensure that any implementation default property value is replaced by a value for that property explicitly set by a component using that implementation. [ASM40009]

3.1.4 Implementation

Implementation represents characteristics inherent to the implementation itself, in particular intents and policies. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of intents and policies. ~~The following snippet~~[Snippet 3-5](#) shows the ~~component-type~~[componentType](#) pseudo-schema with the pseudo-schema for a implementation child element:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Component type implementation schema snippet -->
<componentType xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
... >

  <service ... />*
  <reference ... >*
  <property ... />*

  <implementation requires="list of xs:QName"?
    -policySets="list of xs:QName" ?/? ">
    <requires/>*
    <policySetAttachment/>*
  </implementation>?
</componentType>
```

[Snippet 33-5: componentType Pseudo-Schema with implementation Child Element](#)

The **implementation** element has the ~~following-attributes~~:

- **requires** : [QName list Of QNames \(0..n1\)](#) - a list of policy intents. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute.
- **policySets** : [QName list Of QNames \(0..n1\)](#) - a list of policy sets. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute.

The **implementation** element has the **subelements**:

- **requires** : **requires (0..n)** - A service element has **zero or more requires subelements**. See the [Policy Framework specification \[SCA-POLICY\]](#) for a description of this element.
- **policySetAttachment** : **policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the [Policy Framework specification \[SCA-POLICY\]](#) for a description of this element.

3.2 Example ComponentType

~~The following snippet~~[Snippet 3-6](#) shows the contents of the componentType file for the MyValueServiceImpl implementation. The componentType file shows the services, references, and properties of the MyValueServiceImpl implementation. In this case, Java is used to define interfaces:

```
<?xml version="1.0" encoding="ASCII"?>
<del>componentType xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903"
<componentType xmlns=http://docs.oasis-open.org/ns/opencsa/sca/200912
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">

  <service name="MyValueService">
    <interface.java interface="services.myvalue.MyValueService"/>
  </service>

  <reference name="customerService">
    <interface.java interface="services.customer.CustomerService"/>
  </reference>
  <reference name="stockQuoteService">
```



```

547         <interface.java
548             interface="services.stockquote.StockQuoteService"/>
549     </reference>
550
551     <property name="currency" type="xsd:string">USD</property>
552
553 </componentType>

```

Snippet 33-6: Example componentType

3.3 Example Implementation

The following is an example implementation, written in Java. See the SCA Example Code document [3] for details.

Snippet 3-7 and Snippet 3-8 are an example implementation, written in Java.

AccountServiceImpl implements the **AccountService** interface, which is defined via a Java interface:

```

560 package services.account;
561
562 @Remotable
563 public interface AccountService {
564
565     AccountReport getAccountReport(String customerID);
566
567 }

```

The following Snippet 33-7: Example Interface in Java

Snippet 3-8 is a full listing of the **AccountServiceImpl** class, showing the Service it implements, plus the service references it makes and the settable properties that it has. Notice the use of Java annotations to mark SCA aspects of the code, including the **@Property**, **@Reference** and **@Service** annotations:

```

574 package services.account;
575
576 import java.util.List;
577
578 import commonj.sdo.DataFactory;
579
580 import org.oasisopen.sca.annotation.Property;
581 import org.oasisopen.sca.annotation.Reference;
582 import org.oasisopen.sca.annotation.Service;
583
584 import services.accountdata.AccountDataService;
585 import services.accountdata.CheckingAccount;
586 import services.accountdata.SavingsAccount;
587 import services.accountdata.StockAccount;
588 import services.stockquote.StockQuoteService;
589
590 @Service(AccountService.class)
591 public class AccountServiceImpl implements AccountService {
592
593     @Property
594     private String currency = "USD";
595
596     @Reference
597     private AccountDataService accountDataService;
598     @Reference
599     private StockQuoteService stockQuoteService;
600
601     public AccountReport getAccountReport(String customerID) {
602
603         DataFactory dataFactory = DataFactory.INSTANCE;
604         AccountReport accountReport =
605             (AccountReport) dataFactory.create(AccountReport.class);
606         List accountSummaries = accountReport.getAccountSummaries();

```

```

607
608     CheckingAccount checkingAccount = accountDataService.getCheckingAccount(customerID);
609     AccountSummary checkingAccountSummary =
610         (AccountSummary)dataFactory.create(AccountSummary.class);
611     checkingAccountSummary.setAccountNumber(checkingAccount.getAccountNumber());
612     checkingAccountSummary.setAccountType("checking");
613
614     checkingAccountSummary.setBalance(fromUSDollarToCurrency(checkingAccount.getBalance()));
615     accountSummaries.add(checkingAccountSummary);
616
617     SavingsAccount savingsAccount = accountDataService.getSavingsAccount(customerID);
618     AccountSummary savingsAccountSummary =
619         (AccountSummary)dataFactory.create(AccountSummary.class);
620     savingsAccountSummary.setAccountNumber(savingsAccount.getAccountNumber());
621     savingsAccountSummary.setAccountType("savings");
622
623     savingsAccountSummary.setBalance(fromUSDollarToCurrency(savingsAccount.getBalance()));
624     accountSummaries.add(savingsAccountSummary);
625
626     StockAccount stockAccount = accountDataService.getStockAccount(customerID);
627     AccountSummary stockAccountSummary =
628         (AccountSummary)dataFactory.create(AccountSummary.class);
629     stockAccountSummary.setAccountNumber(stockAccount.getAccountNumber());
630     stockAccountSummary.setAccountType("stock");
631     float balance_ =
632
633     (stockQuoteService.getQuote(stockAccount.getSymbol()))*stockAccount.getQuantity();
634     stockAccountSummary.setBalance(fromUSDollarToCurrency(balance));
635     accountSummaries.add(stockAccountSummary);
636
637     return accountReport;
638 }
639
640 private float fromUSDollarToCurrency(float value){
641
642     if (currency.equals("USD")) return value; else
643     if (currency.equals("EURO")) return value * 0.8f; else
644     return 0.0f;
645 }
646

```

Snippet 33-8: Example Component Implementation in Java

The following is the SCA componentType definition for the AccountServiceImpl, derived by introspection of the code above:

```

651 <?xml version="1.0" encoding="ASCII"?>
652 <componentType xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
653               xmlns:xsd="http://www.w3.org/2001/XMLSchema">
654
655     <service name="AccountService">
656         <interface.java interface="services.account.AccountService"/>
657     </service>
658     <reference name="accountDataService">
659         <interface.java
660             interface="services.accountdata.AccountDataService"/>
661     </reference>
662     <reference name="stockQuoteService">
663         <interface.java
664             interface="services.stockquote.StockQuoteService"/>
665     </reference>
666
667     <property name="currency" type="xsd:string"/>
668
669 </componentType>

```

Snippet 33-9: Example componentType for Implementation in Snippet 3-8

672 | Note that the `componentType` property element for "currency" has no default value declared, despite the
673 | code containing an initializer for the property field setting it to "USD". This is because the initializer cannot
674 | be introspected at runtime and the value cannot be extracted.

675 | For full details about Java implementations, see the [Java Component Implementation Specification](#) [SCA-
676 | Java]. Other implementation types have their own specification documents.

4 Component

Components are the basic elements of business function in an SCA assembly, which are combined into complete business solutions by SCA composites.

Components are configured **instances** of **implementations**. Components provide and consume services. More than one component can use and configure the same implementation, where each component configures the implementation differently.

Components are declared as subelements of a composite in a file with a **.composite** extension. A component is represented by a **component element** which is a child of the composite element. There can be **zero or more** component elements within a composite. ~~The following snippet~~ Snippet 4-1 Snippet 4-1 shows the composite pseudo-schema with the pseudo-schema for the component child element-:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Component schema snippet -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912" ... >
  ...
  <component name="xs:NCName" autowire="xs:boolean"?
    requires="list of xs:QName"? policySets="list of xs:QName"?
    <constrainingType="xs:QName"?>*
    <implementation ... />?
    <service ... />*
    <reference ... />*
    <property ... />*
    <requires/>*
    <policySetAttachment/>*
  </component>
  ...
</composite>
```

The **component** element has the following **attributes**:

- **name : NCName (1..1)** – the name of the component. The @name attribute of a <component/> child element of a <composite/> MUST be unique amongst the component elements of that <composite/> [ASM50004]

Snippet 44-1: composite Pseudo-Schema with component Child Element

The **component** element has the **attributes**:

- **name : NCName (1..1)** – the name of the component. The @name attribute of a <component/> child element of a <composite/> MUST be unique amongst the component elements of that <composite/> The @name attribute of a <component/> child element of a <composite/> MUST be unique amongst the component elements of that <composite/> [ASM50001]
- **autowire : boolean (0..1)** – whether contained component references are autowired, as described in the Autowire section. Default is false.
- **requires : QNameListOfQNames (0..n1)** – a list of policy intents. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.
- **policySets : QNameListOfQNames (0..n1)** – a list of policy sets. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.
- ~~**constrainingType : QName (0..1)** – the name of a constrainingType. When specified, the set of services, references and properties of the component, plus related intents, is constrained~~

~~to the set defined by the constrainingType. See the ConstrainingType Section for more details.~~

The **component** element has the following **child elements**:

- **implementation** : **ComponentImplementation (0..1)** – see component implementation section.
- **service** : **ComponentService (0..n)** – see component service section.
- **reference** : **ComponentReference (0..n)** – see component reference section.
- **property** : **ComponentProperty (0..n)** – see component property section.
- **requires** : **requires (0..n)** - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment** : **policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

4.1 Implementation

A component element has **zero or one implementation element** as its child, which points to the implementation used by the component. ~~A component with no implementation element is not runnable, but components of this kind can be useful during a "top-down" development process as a means of defining the necessary characteristics of the implementation before the implementation is written.~~

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Component Implementation schema snippet -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/2009-03-200912" ... >
  ...
  <component ... > *
    <implementation ... /> * requires="list of xs:QName"?
    policySets="list of xs:QName"?
    <requires/> *
    <policySetAttachment/> *
  </implementation>
  <service ... /> *
  <reference ... /> *
  <property ... /> *
  </component>
  ...
</composite>
```

Snippet 44-2: component Psuedo-Schema with implementation Child Element

The component provides the extensibility point in the assembly model for different implementation types. The references to implementations of different types are expressed by implementation type specific implementation elements.

For example the elements **implementation.java**, **implementation.bpel**, **implementation.cpp**, and **implementation.c** point to Java, BPEL, C++, and C implementation types respectively. **implementation.composite** points to the use of an SCA composite as an implementation. **implementation.spring** and **implementation.ejb** are used for Java components written to the Spring framework and the Java EE EJB technology respectively.

The following snippets Snippet 4-3 Snippet 4-3 – Snippet 4-5 Snippet 4-5 show implementation elements for the Java and BPEL implementation types and for the use of a composite as an implementation:

```
<implementation.java class="services.myvalue.MyValueServiceImpl" />
```

Snippet 44-3: Example implementation.java Element

```
<implementation.bpel process="ans:MoneyTransferProcess"/>
```

Snippet 44-4: Example implementation.bpel Element

```
<implementation.composite name="bns:MyValueComposite"/>
```

Snippet 44-5: Example implementation.composite Element

New implementation types can be added to the model as described in the Extension Model section.

At runtime, an **implementation instance** is a specific runtime instantiation of the implementation – its runtime form depends on the implementation technology used. The implementation instance derives its business logic from the implementation on which it is based, but the values for its properties and references are derived from the component which configures the implementation.

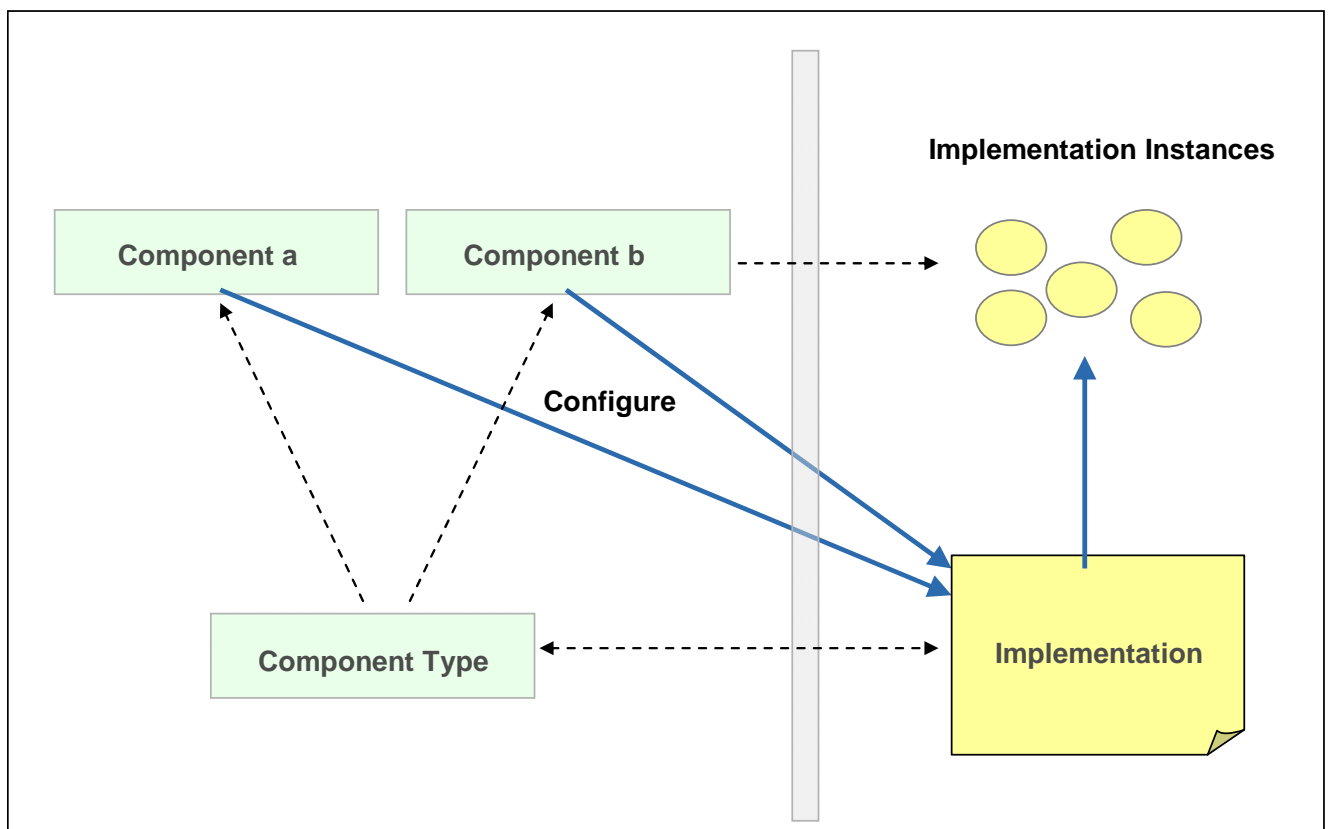


Figure 444-1: Relationship of Component and Implementation

4.2 Service

The component element can have **zero or more service elements** as children which are used to configure the services of the component. The services that can be configured are defined by the implementation. The following snippet Snippet 4-6 Snippet 4-6 shows the component pseudo-schema with the pseudo-schema for a service child element:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Component Service schema snippet -->
```

```

797 <composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912" ... >
798   ...
799   <component ... >*
800     <implementation ... />*
801     <service name="xs:NCName" requires="list of xs:QName"?
802       policySets="list of xs:QName"?>*
803       <interface ... />?
804       <binding ... />*
805       <callback?>
806       <binding ... />+
807     </callback>
808     <requires/>*
809     <policySetAttachment/>*
810   </service>
811   <reference ... />*
812   <property ... />*
813 </component>
814   ...
815 </composite>

```

Snippet 44-6: component Psuedo-Schema with service Child Element

The **component service** element has the following attributes:

- **name : NCName (1..1)** - the name of the service. The @name attribute of a service element of a <component/> MUST be unique amongst the service elements of that <component/>. The @name attribute of a service element of a <component/> MUST be unique amongst the service elements of that <component/> [ASM50002] The @name attribute of a service element of a <component/> MUST match the @name attribute of a service element of the componentType of the <implementation/> child element of the component. The @name attribute of a service element of a <component/> MUST match the @name attribute of a service element of the componentType of the <implementation/> child element of the component. [ASM50003]
- **requires : QNameListOfQNames (0..n1)** – a list of policy intents. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.
Note: The effective set of policy intents for the service consists of any intents explicitly stated in this @requires attribute, combined with any intents specified for the service by the implementation.
- **policySets : QNameListOfQNames (0..n1)** – a list of policy sets. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.

The **component service** element has the following child elements:

- **interface : Interface (0..1)** - A service has **zero or one interface**, which describes the operations provided by the service. The interface is described by an **interface element** which is a child element of the service element. If no interface is specified, then the interface specified for the service in the componentType of the implementation is in effect. If a <service/> element has an interface subelement specified, the interface MUST provide a compatible subset of the interface declared for the equivalent service in the componentType of the implementation. If an interface is declared for a component service, the interface MUST provide a compatible subset of the interface declared for the equivalent service in the componentType of the implementation [ASM50004] For details on the interface element see the Interface section.
- **binding : Binding (0..n)** - A service element has **zero or more binding elements** as children. If no binding elements are specified for the service, then the bindings specified for the equivalent service in the componentType of the implementation MUST be used, but if the componentType also has no bindings specified, then <binding.sca/> MUST be used as the binding. If binding elements are specified for the service, then those bindings MUST be used and they override any bindings specified for the equivalent service in the componentType of the implementation. If no binding elements are specified for the service, then the bindings specified for the equivalent service in the componentType

of the implementation MUST be used, but if the componentType also has no bindings specified, then `<binding.sca/>` MUST be used as the binding. If binding elements are specified for the service, then those bindings MUST be used and they override any bindings specified for the equivalent service in the componentType of the implementation. [ASM50005] Details of the binding element are described in the Bindings section. The binding, combined with any PolicySets in effect for the binding, needs to satisfy the set of policy intents for the service, as described in the Policy Framework specification [SCA-POLICY].

- **callback (0..1) / binding : Binding (1..n)** - A **callback** element is used if the interface has a callback defined and the callback element has one or more **binding** elements as subelements. The **callback** and its binding subelements are specified if there is a need to have binding details used to handle callbacks. If the callback element is present and contains one or more binding child elements, then those bindings MUST be used for the callback. If the callback element is present and contains one or more binding child elements, then those bindings MUST be used for the callback. [ASM50006] If the callback element is not present, the behaviour is runtime implementation dependent.
- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

4.3 Reference

The component element can have **zero or more reference elements** as children which are used to configure the references of the component. The references that can be configured are defined by the implementation. The following snippet Snippet 4-7 shows the component pseudo-schema with the pseudo-schema for a reference child element:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Component Reference schema snippet -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912" ... >
  ...
  <component ... >*
    <implementation ... />?
    <service ... />*
    <reference name="xs:NCName"
      target="list of xs:anyURI"? autowire="xs:boolean"?
      multiplicity="0..1 or 1..1 or 0..n or 1..n"?
      nonOverridable="xs:boolean"
      wiredByImpl="xs:boolean"? requires="list of
xs:QName"?
      policySets="list of xs:QName"?>*
      <interface ... />?
      <binding uri="xs:anyURI"? requires="list of
xs:QName"?
      policySets="list of xs:QName"?/>*
      <callback?
        <binding ... />+
      </callback>
      <requires/>*
      <policySetAttachment/>*
    </reference>
    <property ... />*
  </component>
  ...
</composite>
```

Snippet 44-7: component Psuedo-Schema with reference Child Element

The **component reference** element has the following attributes:

- **name : NCName (1..1)** – the name of the reference. The @name attribute of a service element of a <component/> MUST be unique amongst the service elements of that <component/>. The @name attribute of a service element of a <component/> MUST be unique amongst the service elements of that <component/> [ASM50007]. The @name attribute of a reference element of a <component/> MUST match the @name attribute of a reference element of the componentType of the <implementation/> child element of the component. The @name attribute of a reference element of a <component/> MUST match the @name attribute of a reference element of the componentType of the <implementation/> child element of the component. [ASM50008]
 - **autowire : boolean (0..1)** – whether the reference is autowired, as described in the Autowire section. Default is false.
 - The default value of the @autowire attribute MUST be the value of the @autowire attribute on the component containing the reference, if present, or else the value of the @autowire attribute of the composite containing the component, if present, and if neither is present, then it is "false". The default value of the @autowire attribute MUST be the value of the @autowire attribute on the component containing the reference, if present, or else the value of the @autowire attribute of the composite containing the component, if present, and if neither is present, then it is "false". [ASM50043]
 - **requires : QNameListOfQNames (0..n1)** – a list of policy intents. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.
Note: The effective set of policy intents for the reference consists of any intents explicitly stated in this @requires attribute, combined with any intents specified for the reference by the implementation.
 - **policySets : QNameListOfQNames (0..n1)** – a list of policy sets. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.
 - **multiplicity : 0..1/1..1/0..n/1..n (0..1)** - defines the number of wires that can connect the reference to target services. Overrides the multiplicity specified for this reference in the componentType of the implementation. The multiplicity can have the following values
 - 0..1 – zero or one wire can have the reference as a source
 - 1..1 – one wire can have the reference as a source
 - 0..n - zero or more wires can have the reference as a source
 - 1..n – one or more wires can have the reference as a sourceThe value of multiplicity for a component reference MUST only be equal or further restrict any value for the multiplicity of the reference with the same name in the componentType of the implementation, where further restriction means 0..n to 0..1 or 1..n to 1..1. The value of multiplicity for a component reference MUST only be equal or further restrict any value for the multiplicity of the reference with the same name in the componentType of the implementation, where further restriction means 0..n to 0..1 or 1..n to 1..1. [ASM50009]
- If not present, the value of multiplicity is equal to the multiplicity specified for this reference in the componentType of the implementation - if not present in the componentType, the value defaults to 1..1.
- **target : anyURI (0..n)** – a list of one or more of target service URI's, depending on multiplicity setting. Each value wires the reference to a component service that resolves the reference. For more details on wiring see the section on Wires. Overrides any target specified for this reference on the implementation.
 - **wiredByImpl : boolean (0..1)** – a boolean value, "false" by default, which indicates that the implementation wires this reference dynamically. If set to "true" it indicates that the target of the reference is set at runtime by the implementation code (e.g. by the code obtaining an endpoint reference by some means and setting this as the target of the reference through the use of programming interfaces defined by the relevant Client and Implementation specification). If @wiredByImpl="true" is set for a reference, then the reference MUST NOT be wired statically within a

composite, but left unwired. If @wiredByImpl="true" is set for a reference, then the reference MUST NOT be wired statically within a composite, but left unwired. [ASM50010]

- **nonOverridable : boolean (0..1)** - a boolean value, "false" by default, which indicates whether this component reference can have its targets overridden by a composite reference which promotes the component reference.
If @nonOverridable==false, ~~the if any target(s) efare configured onto the promoting composite references which promote the component reference, then those targets replace~~ all the targets explicitly declared on the component reference for any value of @multiplicity on the component reference. If ~~the component reference has @nonOverridable==false and @multiplicity 1..1 and no targets are defined on any of the reference has a target, then any composite reference references which promotes the component reference has @multiplicity 0..1 by default and MAY have an explicit @multiplicity of either 0..1 or 1..1.~~
If @nonOverridable==true, and the ~~_, then any targets explicitly declared on the component reference are used. This means in effect that any targets declared on the component reference has @multiplicity 0..1 or 1..1 and the component act as default targets for that reference also declares a target, promotion implies that the promoting composite reference has @wiredByImpl==true and the composite reference cannot supply a target, but can influence the policy attached to the component reference.~~

If a component reference has @multiplicity 0..1 or 1..1 and @nonOverridable==true, then the component reference MUST NOT be promoted by any composite reference. If a component reference has @multiplicity 0..1 or 1..1 and @nonOverridable==true, then the component reference MUST NOT be promoted by any composite reference. [ASM50042]

If @nonOverridable==true, and the component reference @multiplicity is 0..n or 1..n, ~~promotion targeting is any targets configured onto the composite references which promote the component reference are added to any references declared on the component reference - that is, the targets are additive.~~

The component reference element has the ~~following~~ child elements:

- **interface : Interface (0..1)** - A reference has **zero or one interface**, which describes the operations of the reference. The interface is described by an **interface element** which is a child element of the reference element. If no interface is specified, then the interface specified for the reference in the componentType of the implementation is in effect. ~~If an interface is declared for a component reference, the interface MUST provide a compatible superset of the interface declared for the equivalent reference in the componentType of the implementation, i.e. provide the same operations or a .~~ If an interface is declared for a component reference, the interface MUST provide a compatible superset of the operations defined by interface declared for the equivalent reference in the componentType of the implementation for the reference. [ASM50011] For details on the interface element see the [Interface section](#).
- **binding : Binding (0..n)** - A reference element has **zero or more binding elements** as children. ~~If no binding elements are specified for the reference, then the bindings specified for the equivalent reference in the componentType of the implementation MUST be used. If binding elements are specified for the reference, then those bindings MUST be used and they override any bindings specified for the equivalent reference in the componentType of the implementation. If no binding elements are specified for the reference, then the bindings specified for the equivalent reference in the componentType of the implementation MUST be used. If binding elements are specified for the reference, then those bindings MUST be used and they override any bindings specified for the equivalent reference in the componentType of the implementation.~~ [ASM50012] It is valid for there to be no binding elements on the component reference and none on the reference in the componentType - the binding used for such a reference is determined by the target service. See the [section on the bindings of component services](#) for a description of how the binding(s) applying to a service are determined.

Details of the binding element are described in the [Bindings section](#). The binding, combined with any PolicySets in effect for the binding, needs to satisfy the set of policy intents for the reference, as described in the [Policy Framework specification](#) [40]SCA-POLICY].

A reference identifies zero or more target services that satisfy the reference. This can be done in a number of ways, which are fully described in section "[Specifying the Target Service\(s\) for a Reference](#)"

- **callback (0..1) / binding : Binding (1..n)** - A **callback** element used if the interface has a callback defined and the callback element has one or more **binding** elements as subelements. The **callback** and its binding subelements are specified if there is a need to have binding details used to handle callbacks. **If the callback element is present and contains one or more binding child elements, then those bindings MUST be used for the callback.** ~~If the callback element is present and contains one or more binding child elements, then those bindings MUST be used for the callback.~~ [ASM50006] If the callback element is not present, the behaviour is runtime implementation dependent.
- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the [Policy Framework specification](#) [SCA-POLICY] for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the [Policy Framework specification](#) [SCA-POLICY] for a description of this element.

4.3.1 Specifying the Target Service(s) for a Reference

A reference defines zero or more target services that satisfy the reference. The target service(s) can be defined in the following ways:

1. Through a value specified in the @target attribute of the reference element
2. Through a target URI specified in the @uri attribute of a binding element which is a child of the reference element
3. Through the setting of one or more values for binding-specific attributes and/or child elements of a binding element that is a child of the reference element
4. Through the specification of @autowire="true" for the reference (or through inheritance of that value from the component or composite containing the reference)
5. Through the specification of @wiredByImpl="true" for the reference
6. Through the promotion of a component reference by a composite reference of the composite containing the component (the target service is then identified by the configuration of the composite reference)
7. Through the presence of a <wire/> element which has the reference specified in its @source attribute.

Combinations of these different methods are allowed, and the following rules MUST be observed:

- **If @wiredByImpl="true", other methods of specifying the target service MUST NOT be used.** ~~If @wiredByImpl="true", other methods of specifying the target service MUST NOT be used.~~ [ASM50013]
- **If @autowire="true", the autowire procedure MUST only be used if no target is identified by any of the other ways listed above. It is not an error if @autowire="true" and a target is also defined through some other means, however in this case the autowire procedure MUST NOT be used.** ~~If @autowire="true", the autowire procedure MUST only be used if no target is identified by any of the other ways listed above. It is not an error if @autowire="true" and a target is also defined through some other means, however in this case the autowire procedure MUST NOT be used.~~ [ASM50014]
- **If a reference has a value specified for one or more target services in its @target attribute, there MUST NOT be any child <binding/> elements declared for that reference.** ~~If a reference has a value~~

specified for one or more target services in its @target attribute, there MUST NOT be any child <binding/> elements declared for that reference. [ASM50026]

- If a binding element has a value specified for a target service using its @uri attribute, the binding element MUST NOT identify target services using binding specific attributes or elements. If a binding element has a value specified for a target service using its @uri attribute, the binding element MUST NOT identify target services using binding specific attributes or elements. [ASM50015]
- It is possible that a particular binding type MAY require that uses more than a simple URI for the address of a target service uses more than a simple URI. In cases where a reference element has a binding subelement of such a type that uses more than simple URI, the @uri attribute of the binding element MUST NOT be used to identify the target service - instead, in this case binding specific attributes and/or child elements MUST be used. It is possible that a particular binding type uses more than a simple URI for the address of a target service. In cases where a reference element has a binding subelement that uses more than simple URI, the @uri attribute of the binding element MUST NOT be used to identify the target service - in this case binding specific attributes and/or child elements MUST be used. [ASM50016]
- If any <wire/> element with its @replace attribute set to "true" has a particular reference specified in its @source attribute, the value of the @target attribute for that reference MUST be ignored and MUST NOT be used to define target services for that reference. If any <wire/> element with its @replace attribute set to "true" has a particular reference specified in its @source attribute, the value of the @target attribute for that reference MUST be ignored and MUST NOT be used to define target services for that reference. [ASM50034]

4.3.1.1 Multiplicity and the Valid Number of Target Services for a Reference

The number of target services configured for a reference are constrained by the following rules.

- A reference with multiplicity 0..1 or 0..n MAY MUST have no more than one target service defined. A reference with multiplicity 0..1 MUST have no more than one target service defined. [ASM50018]
- [ASM50039]
- A reference with multiplicity 0..1 or 1..1 MUST NOT have more than exactly one target service defined. A reference with multiplicity 1..1 MUST have exactly one target service defined. [ASM50019 ASM50040]
- A reference with multiplicity 1..4 or n MUST have at least one target service defined. A reference with multiplicity 1..n MUST have at least one target service defined. [ASM50020]
- [ASM50041]
- A reference with multiplicity 0..n can have any number of target services defined.
 - A reference with multiplicity 0..n or 1..n MAY have one or more target services defined. Where it is detected that the rules for the number of target services for a reference have been violated, either at deployment or at execution time, an SCA Runtime MUST raise an error no later than when the reference is invoked by the component implementation. Where it is detected that the rules for the number of target services for a reference have been violated, either at deployment or at execution time, an SCA Runtime MUST raise an error no later than when the reference is invoked by the component implementation. [ASM50024]

Where it is detected that the rules for the number of target services for a reference have been violated, either at deployment or at execution time, an SCA Runtime MUST raise an error no later than when the reference is invoked by the component implementation. [ASM50022]

For example, where a composite is used as a component implementation, wires and target services cannot be added to the composite after deployment. As a result, for components which are part of the composite, both missing wires and wires with a non-existent target can be detected at deployment time through a scan of the contents of the composite.

A contrasting example is a component deployed to the SCA Domain. At the Domain level, the target of a wire, or even the wire itself, can form part of a separate deployed contribution and as a result these can

be deployed after the original component is deployed. For the cases where it is valid for the reference to have no target service specified, the component implementation language specification needs to define the programming model for interacting with an untargetted reference.

Where a component reference is promoted by a composite reference, the promotion MUST be treated from a multiplicity perspective as providing 0 or more target services for the component reference, depending upon the further configuration of the composite reference. These target services are in addition to any target services identified on the component reference itself, subject to the rules relating to multiplicity. Where a component reference is promoted by a composite reference, the promotion MUST be treated from a multiplicity perspective as providing 0 or more target services for the component reference, depending upon the further configuration of the composite reference. These target services are in addition to any target services identified on the component reference itself, subject to the rules relating to multiplicity. [ASM50025]

4.4 Property

The component element has **zero or more property elements** as its children, which are used to configure data values of properties of the implementation. Each property element provides a value for the named property, which is passed to the implementation. The properties that can be configured and their types are defined by the component type of the implementation. An implementation can declare a property as multi-valued, in which case, multiple property values can be present for a given property.

The property value can be specified in **one** of five ways:

- As a value, supplied in the **@value** attribute of the property element.

- If the **@value** attribute of a component property element is declared, the type of the property MUST be an XML Schema simple type and the **@value** attribute MUST contain a single value of that type. If the **@value** attribute of a component property element is declared, the type of the property MUST be an XML Schema simple type and the **@value** attribute MUST contain a single value of that type. [ASM50027]

For example,

```
<property name="pi" value="3.14159265" />
```

- As a value, supplied as the content of the **value** subelement(s) of the property element. If the value subelement of a component property is specified, the type of the property MUST be an XML Schema simple type or an XML schema complex type. [ASM50028]

Snippet 44-8: Example property using @value attribute

- As a value, supplied as the content of the **value** subelement(s) of the property element.

If the value subelement of a component property is specified, the type of the property MUST be an XML Schema simple type or an XML schema complex type. If the value subelement of a component property is specified, the type of the property MUST be an XML Schema simple type or an XML schema complex type. [ASM50028]

For example,

- property defined using a XML Schema simple type and which contains a single value

```
<property name="pi">  
  <value>3.14159265</value>  
</property>
```

Snippet 44-9: Example property with a Simple Type Containing a Single Value

- property defined using a XML Schema simple type and which contains multiple values

```
<property name="currency">  
  <value>EURO</value>
```

```
<value>USDollar</value>
</property>
```

Snippet 44-10: Example property with a Simple Type Containing Multiple Values

- property defined using a XML Schema complex type and which contains a single value

```
<property name="complexFoo">
  <value attr="bar">
    <foo:a>TheValue</foo:a>
    <foo:b>InterestingURI</foo:b>
  </value>
</property>
```

Snippet 44-11: Example property with a Complex Type Containing a Single Value

- property defined using a XML Schema complex type and which contains multiple values

```
<property name="complexBar">
  <value anotherAttr="foo">
    <bar:a>AValue</bar:a>
    <bar:b>InterestingURI</bar:b>
  </value>
  <value attr="zing">
    <bar:a>BValue</bar:a>
    <bar:b>BoringURI</bar:b>
  </value>
</property>
```

- As a value, supplied as the content of the property element.

If a component property value is declared using a child element of the <property/> element, the type of the property MUST be an XML Schema global element and the declared child element MUST be an instance of that global element. [ASM50029]

Snippet 44-12: Example property with a Complex Type Containing Multiple Values

- As a value, supplied as the content of the property element.

If a component property value is declared using a child element of the <property/> element, the type of the property MUST be an XML Schema global element and the declared child element MUST be an instance of that global element. If a component property value is declared using a child element of the <property/> element, the type of the property MUST be an XML Schema global element and the declared child element MUST be an instance of that global element. [ASM50029]

For example,

- property defined using a XML Schema global element declaration and which contains a single value

```
<property name="foo">
  <foo:SomeGED ...>...</foo:SomeGED>
</property>
```

Snippet 44-13: Example property with a Global Element Declaration Containing a Single Value

- property defined using a XML Schema global element declaration and which contains multiple values

```
<property name="bar">
  <bar:SomeOtherGED ...>...</bar:SomeOtherGED>
  <bar:SomeOtherGED ...>...</bar:SomeOtherGED>
</property>
```

Snippet 44-14 Example property with a Global Element Declaration Containing Multiple Values

- By referencing a Property value of the composite which contains the component. The reference is made using the **@source** attribute of the property element.

The form of the value of the @source attribute follows the form of an XPath expression. This form allows a specific property of the composite to be addressed by name. Where the composite property is of a complex type, the XPath expression can be extended to refer to a sub-part of the complex property value.

- So, for example, source="\$currency" is used to reference a property of the composite called "currency", while source="\$currency/a" references the sub-part "a" of the complex composite property with the name "currency".
- By specifying a dereferencable URI to a file containing the property value through the **@file** attribute. The contents of the referenced file are used as the value of the property.

If more than one property value specification is present, the @source attribute takes precedence, then the @file attribute.

For a property defined using a XML Schema simple type and for which a single value is desired, can be set either using the @value attribute or the <value> child element. The two forms in such a case are equivalent.

When a property has multiple values set, they MUST all be contained within the same property element. A <component/> element MUST NOT contain two <property/> subelements with the same value of the @name attribute. When a property has multiple values set, all the values MUST be contained within a single property element. When a property has multiple values set, all the values MUST be contained within a single property element. [ASM50030ASM50044]

The type of the property can be specified in **one** of two ways:

- by the qualified name of a type defined in an XML schema, using the **@type** attribute
- by the qualified name of a global element in an XML schema, using the **@element** attribute

The property type specified for the property element of a component MUST be compatible with the type of the property with the same @name declared in the component type of the implementation used by the component. If no type is declared in the component property element, the type of the property declared in the componentType of the implementation MUST be used. The property type specified for the property element of a component MUST be compatible with the type of the property with the same @name declared in the component type of the implementation used by the component. If no type is declared in the component property element, the type of the property declared in the componentType of the implementation MUST be used. [ASM50036]

The **following snippet** meaning of "compatible" for property types is defined in the section **Property Type Compatibility**.

Snippet 4-15 Snippet 4-15 shows the component **pseudo**-schema with the **pseudo**-schema for a property child element:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Component Property schema snippet -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/2009-03-200912" ... >
  ...
  <component ... > *
    <implementation ... /> ?
    <service ... /> *
    <reference ... /> *
```

```

1256     <property name="xs:NCName"
1257             (type="xs:QName" | element="xs:QName")?
1258             many="xs:boolean"?
1259             source="xs:string"? file="xs:anyURI"?
1260             requires="list of xs:QName"?
1261             policySets="list of xs:QName"?
1262             value="xs:string"?>*
1263     [<value>+ | xs:any+ ]?
1264 </property>
1265 </component>
1266 ...
1267 </composite>

```

The **component property** element has the following **attributes**:

***name : NCName (1..1)** – the name of the property. The @name attribute of a property element of a <component/> MUST be unique amongst the property elements of that <component/>. [ASM50031] The @name attribute of a property element of a <component/> MUST match the @name attribute of a property element of the componentType of the <implementation/> child element of the component. [ASM50037]

Snippet 44-15: component Psuedo-Schema with property Child Element

The **component property** element has the **attributes**:

- **name : NCName (1..1)** – the name of the property. The @name attribute of a property element of a <component/> MUST be unique amongst the property elements of that <component/>. The @name attribute of a property element of a <component/> MUST be unique amongst the property elements of that <component/>. [ASM50031] The @name attribute of a property element of a <component/> MUST match the @name attribute of a property element of the componentType of the <implementation/> child element of the component. The @name attribute of a property element of a <component/> MUST match the @name attribute of a property element of the componentType of the <implementation/> child element of the component. [ASM50037]
- zero or one of (0..1):
 - ⊖ **type : QName** – the type of the property defined as the qualified name of an XML schema type
 - ⊖ **element : QName** – the type of the property defined as the qualified name of an XML schema global element – the type is the type of the global element

A single property element MUST NOT contain both a @type attribute and an @element attribute. A single property element MUST NOT contain both a @type attribute and an @element attribute. [ASM50035]
- **source : string (0..1)** – an XPath expression pointing to a property of the containing composite from which the value of this component property is obtained.
- **file : anyURI (0..1)** – a dereferencable URI to a file containing a value for the property
- **many : boolean (0..1)** – whether the property is single-valued (false) or multi-valued (true). Overrides the many specified for this property in the componentType of the implementation. The value can only be equal or further restrict, i.e. if the implementation specifies many true, then the component can say false. In the case of a multi-valued property, it is presented to the implementation as a Collection of property values. If many is not specified, it takes the value defined by the component type of the implementation used by the component.
- **value : string (0..1)** - the value of the property if the property is defined using a simple type.
 - ~~*requires : QName (0..n)~~ – a list of policy intents. See the Policy Framework specification [10] for a description of this attribute.

~~*policySets : QName (0..n) — a list of policy sets. See the Policy Framework specification [10] for a description of this attribute.~~

The ~~component property~~ element has the following ~~child element~~:

~~value :any (0..n) — A property has zero or more, value elements that specify the value(s) of a property that is defined using a XML Schema type. The component property element has the child element:~~

- ~~• value :any (0..n) - A property has zero or more, value elements that specify the value(s) of a property that is defined using a XML Schema type. If a property is single-valued, the <value/> subelement MUST NOT occur more than once. If a property is single-valued, the <value/> subelement MUST NOT occur more than once. [ASM50032] A property <value/> subelement MUST NOT be used when the @value attribute is used to specify the value for that property. A property <value/> subelement MUST NOT be used when the @value attribute is used to specify the value for that property. [ASM50033]~~

4.4.1 Property Type Compatibility

There are a number of situations where the declared type of a property element is matched with the declared type of another property element. These situations include:

- ~~• Where a component <property/> sets a value for a property of an implementation, as declared in the componentType of the implementation~~
- ~~• Where a component <property/> gets its value from the value of a composite <property/> by means of its @source attribute. This situation can also involve the @source attribute referencing a subelement of the composite <property/> value, in which case it is the type of the subelement which must be matched with the type of the component <property/>~~
- ~~• Where the componentType of a composite used as an implementation is calculated and componentType <property/> elements are created for each composite <property/>~~

~~If a property is single-valued, the <value/> subelement MUST NOT occur more than once. In these cases where the types of two property elements are matched, the types declared for the two <property/> elements MUST be compatible. In these cases where the types of two property elements are matched, the types declared for the two <property/> elements MUST be compatible. [ASM50032] A property <value/> subelement MUST NOT be used when the @value attribute is used to specify the value for that property. [ASM50033]~~

~~[ASM50038]~~

~~Two property types are compatible if they have the same XSD type (where declared as XSD types) or the same XSD global element (where declared as XSD global elements). For cases where the type of a property is declared using a different type system (eg Java), then the type of the property is mapped to XSD using the mapping rules defined by the appropriate implementation type specification~~

4.5 Example Component

~~The following figure~~Figure 4-2Figure 4-2 shows the **component symbol** that is used to represent a component in an assembly diagram.

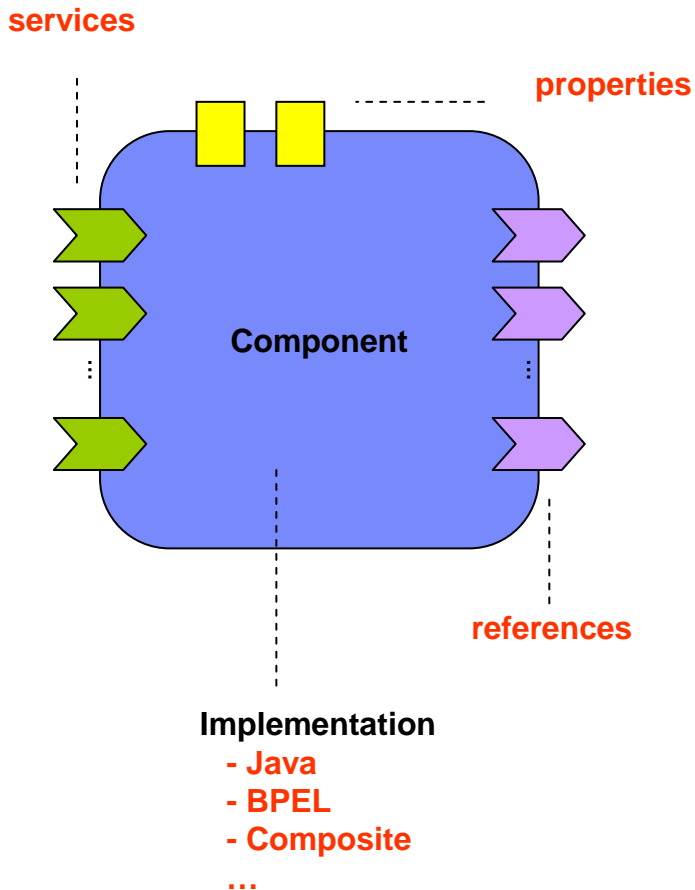


Figure 544-2: Component symbol

The following figureFigure 4-3Figure 4-3 shows the assembly diagram for the MyValueComposite containing the MyValueServiceComponent.

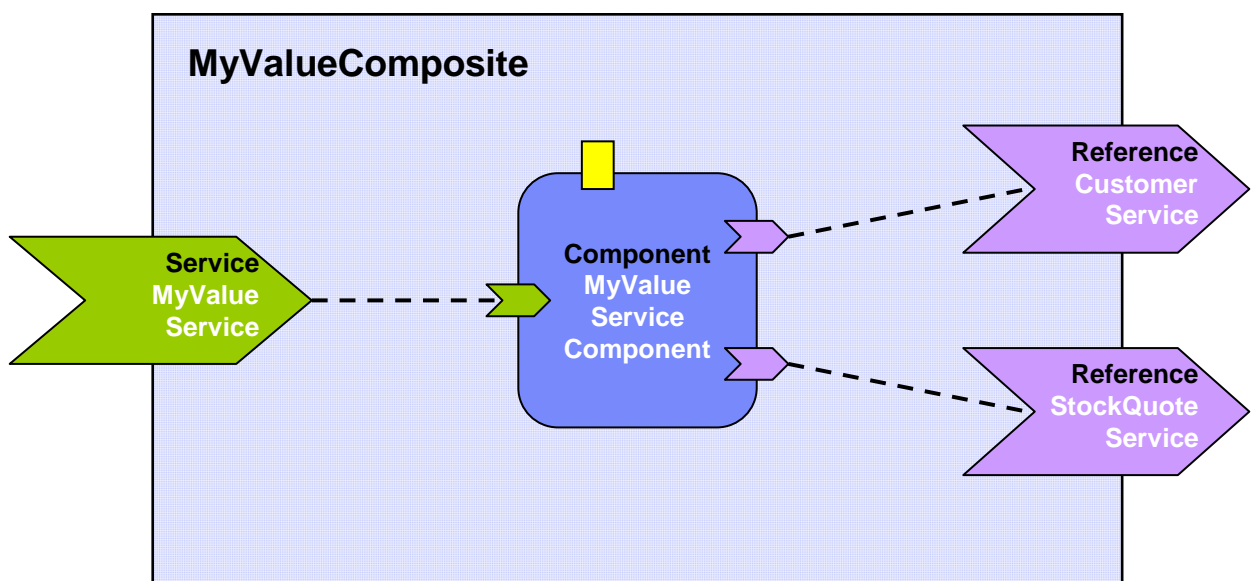


Figure 644-3: Assembly diagram for MyValueComposite

The following snippet [Snippet 4-16: Example composite](#) shows the MyValueComposite.composite file for the MyValueComposite containing the component element for the MyValueServiceComponent. A value is set for the property named currency, and the customerService and stockQuoteService references are promoted:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- MyValueComposite_1 example -->
<composite      xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
                targetNamespace="http://foo.com"
                name="MyValueComposite" >

    <service name="MyValueService" promote="MyValueServiceComponent" />

    <component name="MyValueServiceComponent">
        <implementation.java
            class="services.myvalue.MyValueServiceImpl" />
        <property name="currency">EURO</property>
        <reference name="customerService" />
        <reference name="stockQuoteService" />
    </component>

    <reference name="CustomerService"
        promote="MyValueServiceComponent/customerService" />

    <reference name="StockQuoteService"
        promote="MyValueServiceComponent/stockQuoteService" />

</composite>
```

[Snippet 44-16: Example composite](#)

Note that the references of MyValueServiceComponent are explicitly declared only for purposes of clarity – the references are defined by the MyValueServiceImpl implementation and there is no need to redeclare them on the component unless the intention is to wire them or to override some aspect of them.

The following snippet gives an example of the layout of a composite file if both the currency property and the customerService reference of the MyValueServiceComponent are declared to be multi-valued (many=true for the property and multiplicity=0..n or 1..n for the reference):

```
<?xml version="1.0" encoding="ASCII"?>
<!-- MyValueComposite_2 example -->
<composite      xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
                targetNamespace="http://foo.com"
                name="MyValueComposite" >

    <service name="MyValueService" promote="MyValueServiceComponent" />

    <component name="MyValueServiceComponent">
        <implementation.java
            class="services.myvalue.MyValueServiceImpl" />
        <property name="currency">
            <value>EURO</value>
            <value>Yen</value>
            <value>USDollar</value>
        </property>
        <reference name="customerService"
            target="InternalCustomer/customerService" />
        <reference name="stockQuoteService" />
    </component>
```

```
...  
  
<reference name="CustomerService"  
    promote="MyValueServiceComponent/customerService"/>  
  
<reference name="StockQuoteService"  
    promote="MyValueServiceComponent/stockQuoteService"/>  
  
</composite>
```

Snippet 44-17: Example composite with Multi-Valued property and reference

....this assumes that the composite has another component called InternalCustomer (not shown) which has a service to which the customerService reference of the MyValueServiceComponent is wired as well as being promoted externally through the composite reference CustomerService.

5 Composite

An SCA composite is used to assemble SCA elements in logical groupings. It is the basic unit of composition within an SCA Domain. An **SCA composite** contains a set of components, services, references and the wires that interconnect them, plus a set of properties which can be used to configure components.

Composites can be used as **component implementations** in higher-level composites – in other words the higher-level composites can have components that are implemented by composites. For more detail on the use of composites as component implementations see the section [Using Composites as Component Implementations](#).

The content of a composite can be used within another composite through **inclusion**. When a composite is included by another composite, all of its contents are made available for use within the including composite – the contents are fully visible and can be referenced by other elements within the including composite. For more detail on the inclusion of one composite into another see the section [Using Composites through Inclusion](#).

A composite can be used as a unit of deployment. When used in this way, composites contribute components and wires to an SCA Domain. A composite can be deployed to the SCA Domain either by inclusion, or a composite can be deployed to the Domain as an implementation. For more detail on the deployment of composites, see the section dealing with the [SCA Domain](#).

A composite is defined in an **xxx.composite** file. A composite is represented by a **composite** element. The following snippet [Snippet 5-1](#) shows the **pseudo**-schema for the composite element:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Composite schema snippet -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="xs:anyURI"
  name="xs:NCName" local="xs:boolean"?
  autowire="xs:boolean"? constrainingType="xs:QName"?
  requires="list of xs:QName"? policySets="list of xs:QName"?>

  <include ... />*

  <requires/>*
  <policySetAttachment/>*

  <service ... />*
  <reference ... />*
  <property ... />*

  <component ... />*

  <wire ... />*

</composite>
```

[Snippet 55-1: composite Pseudo-Schema](#)

The **composite** element has the **following attributes**:

- **name : NCName (1..1)** – the name of the composite. The form of a composite name is an XML QName, in the namespace identified by the @targetNamespace attribute. **A composite @name attribute value MUST be unique within the namespace of the composite. A composite @name attribute value MUST be unique within the namespace of the composite. [ASM60001]**

- 1471 •• **targetNamespace** : *anyURI (0..1)* – an identifier for a target namespace into which the composite is
1472 declared
- 1473 •• **local** : *boolean (0..1)* – whether all the components within the composite all run in the same
1474 operating system process. @local="true" for a composite means that all the components within the
1475 composite MUST run in the same operating system process. @local="true" for a composite means
1476 that all the components within the composite MUST run in the same operating system process.
1477 [ASM60002] **local**="false", which is the default, means that different components within the composite
1478 can run in different operating system processes and they can even run on different nodes on a
1479 network.
- 1480 •• **autowire** : *boolean (0..1)* – whether contained component references are autowired, as described in
1481 the [Autowire section](#). Default is false.
- 1482 ~~•• **constrainingType** : *QName (0..1)* – the name of a constrainingType. When specified, the set~~
1483 ~~of services, references and properties of the composite, plus related intents, is constrained to~~
1484 ~~the set defined by the constrainingType. See the ConstrainingType Section for more details.~~
- 1485 •• **requires** : *QNameListOfQNames (0..n1)* – a list of policy intents. See the [Policy Framework](#)
1486 specification [\[40\]SCA-POLICY](#) for a description of this attribute.
- 1487 •• **policySets** : *QNameListOfQNames (0..n1)* – a list of policy sets. See the [Policy Framework](#)
1488 specification [\[40\]SCA-POLICY](#) for a description of this attribute.

1489
1490 The **composite** element has the ~~following~~ **child elements**:

- 1491 • **service** : *CompositeService (0..n)* – see composite service section.
- 1492 • **reference** : *CompositeReference (0..n)* – see composite reference section.
- 1493 • **property** : *CompositeProperty (0..n)* – see composite property section.
- 1494 • **component** : *Component (0..n)* – see component section.
- 1495 • **wire** : *Wire (0..n)* – see composite wire section.
- 1496 • **include** : *Include (0..n)* – see composite include section
- 1497 • ~~**requires** : *requires (0..n)* - A service element has **zero or more requires subelements**. See the~~
1498 ~~[Policy Framework specification \[SCA-POLICY\]](#) for a description of this element.~~
- 1499 • ~~**policySetAttachment** : *policySetAttachment (0..n)* - A service element has **zero or more**~~
1500 ~~**policySetAttachment subelements**. See the [Policy Framework specification \[SCA-POLICY\]](#) for a~~
1501 ~~description of this element.~~

1502 Components contain configured implementations which hold the business logic of the composite. The
1503 components offer services and use references to other services. **Composite services** define the public
1504 services provided by the composite, which can be accessed from outside the composite. **Composite**
1505 **references** represent dependencies which the composite has on services provided elsewhere, outside
1506 the composite. Wires describe the connections between component services and component references
1507 within the composite. Included composites contribute the elements they contain to the using composite.

1508 Composite services involve the **promotion** of one service of one of the components within the composite,
1509 which means that the composite service is actually provided by one of the components within the
1510 composite. Composite references involve the **promotion** of one or more references of one or more
1511 components. Multiple component references can be promoted to the same composite reference, as long
1512 as at least one of the component references has an interface that is a compatible subset
1513 of the interface on the composite reference. Where multiple component references are promoted to the
1514 same composite reference, then they all share the same configuration, including the same target
1515 service(s).

1516 Composite services and composite references can use the configuration of their promoted services and
1517 references respectively (such as Bindings and Policy Sets). Alternatively composite services and
1518 composite references can override some or all of the configuration of the promoted services and
1519 references, through the configuration of bindings and other aspects of the composite service or reference.

Component services and component references can be promoted to composite services and references and also be wired internally within the composite at the same time. For a reference, this only makes sense if the reference supports a multiplicity greater than 1.

5.1 Service

The **services of a composite** are defined by promoting services defined by components contained in the composite. A component service is promoted by means of a composite **service element**.

A composite service is represented by a **service element** which is a child of the composite element.

There can be **zero or more** service elements in a composite. The following snippet Snippet 5-2 Snippet 5-2 shows the composite pseudo-schema with the pseudo-schema for a service child element:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Composite Service schema snippet -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/2009-03-200912" ... >
  ...
  <service name="xs:NCName" promote="xs:anyURI"
    requires="list of xs:QName"? policySets="list of xs:QName"?>*
    <interface ... />?
    <binding ... />*
    <callback>?
    <binding ... />+
  </callback>
  <requires/>*
  <policySetAttachment/>*
</service>
  ...
</composite>
```

Snippet 55-2: composite Psuedo-Schema with service Child Element

The **composite service** element has the following **attributes**:


- **name : NCName (1..1)** – the name of the service. The name of a composite <service/> element MUST be unique across all the composite services in the composite. The name of a composite <service/> element MUST be unique across all the composite services in the composite. [ASM60003] The name of the composite service can be different from the name of the promoted component service.
- **promote : anyURI (1..1)** – identifies the promoted service, the value is of the form <component-name>/<service-name>. The service name can be omitted if the target component only has one service. The same component service can be promoted by more then one composite service. A composite <service/> element's @promote attribute MUST identify one of the component services within that composite. A composite <service/> element's @promote attribute MUST identify one of the component services within that composite. [ASM60004] <include/> processing MUST take place before the processing of the @promote attribute of a composite service is performed. </include/> processing MUST take place before the processing of the @promote attribute of a composite service is performed. [ASM60038]
- **requires : QNameListOfQNames (0..n1)** – a list of policy intents. See the Policy Framework specification [40] SCA-POLICY for a description of this attribute. Specified intents add to or further qualify the required intents defined by the promoted component service.
- **policySets : QNameListOfQNames (0..n1)** – a list of policy sets. See the Policy Framework specification [40] SCA-POLICY for a description of this attribute.

The **composite service** element has the ~~following~~ **child elements**, whatever is not specified is defaulted from the promoted component service.

- **interface : Interface (0..1)** - an interface which describes the operations provided by the composite service. ~~If a composite service interface is specified it MUST be the same or a compatible subset of the interface provided by the promoted component service, i.e. provide a subset of the operations defined by the component service. If a composite service interface is specified it MUST be the same or a compatible subset of the interface provided by the promoted component service, i.e. provide a subset of the operations defined by the component service. If a composite service interface is specified it MUST be the same or a compatible subset of the interface provided by the promoted component service, i.e. provide a subset of the operations defined by the component service.~~ **[ASM60005]** The interface is described by **zero or one interface element** which is a child element of the service element. For details on the interface element see [the Interface section](#).
- **binding : Binding (0..n)** - If bindings are specified they **override** the bindings defined for the promoted component service from the composite service perspective. The bindings defined on the component service are still in effect for local wires within the composite that target the component service. A service element has zero or more **binding elements** as children. Details of the binding element are described in the [Bindings section](#). For more details on wiring see [the Wiring section](#).
- **callback (0..1) / binding : Binding (1..n)** - A **callback** element is used if the interface has a callback defined and the callback has one or more **binding** elements as subelements. The **callback** and its binding subelements are specified if there is a need to have binding details used to handle callbacks. ~~Callback binding elements attached to the composite service override any callback binding elements defined on the promoted component service. If the callback element is not present on the composite service, any callback binding elements on the promoted service are used. If the callback element is not present at all, the behaviour is runtime implementation dependent.~~
- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

5.1.1 Service Examples

~~The following figure~~ **Figure 5-1** shows the service symbol that used to represent a service in an assembly diagram:

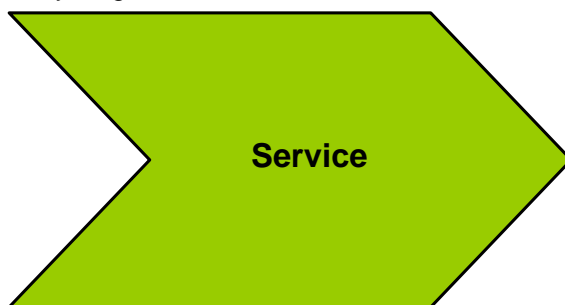

~~Figure 755-1:~~ **Service symbol**

~~The following figure~~ **Figure 5-2** shows the assembly diagram for the MyValueComposite containing the service MyValueService.

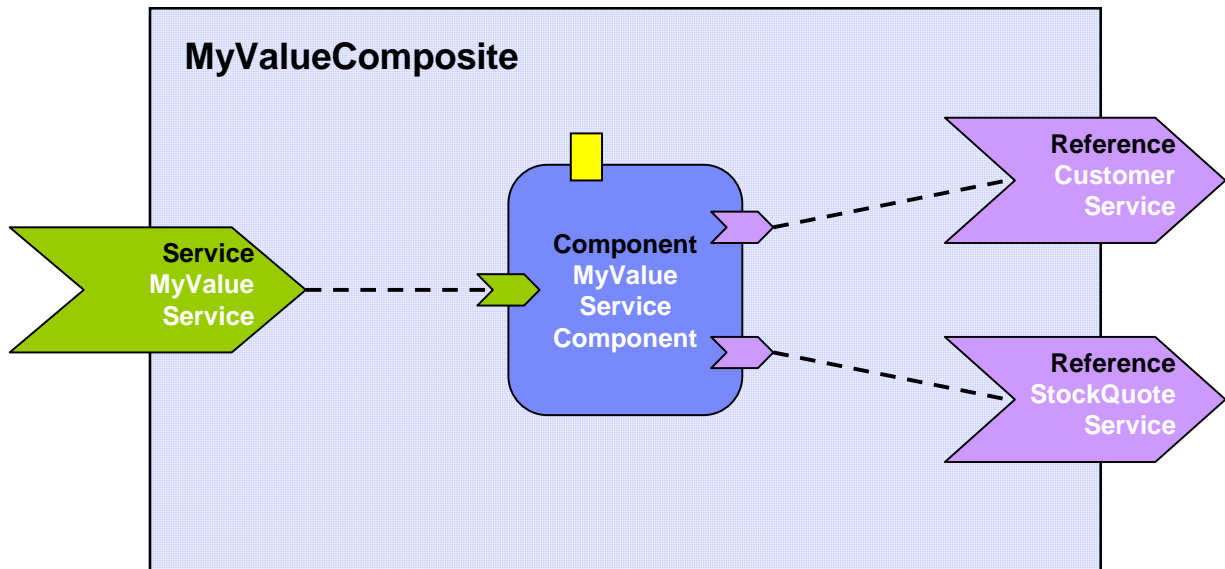


Figure 855-2: MyValueComposite showing Service

The following snippet [Snippet 5-3](#) shows the `MyValueComposite.composite` file for the `MyValueComposite` containing the service element for the `MyValueService`, which is a promote of the service offered by the `MyValueServiceComponent`. The name of the promoted service is omitted since `MyValueServiceComponent` offers only one service. The composite service `MyValueService` is bound using a Web service binding.

```
<?xml version="1.0" encoding="ASCII"?>
<!-- MyValueComposite_4 example -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://foo.com"
  name="MyValueComposite" >

  ...

  <service name="MyValueService" promote="MyValueServiceComponent">
    <interface.java interface="services.myvalue.MyValueService"/>
    <binding.ws portwsdlElement="http://www.myvalue.org/MyValueService#
      wsdl.endpointport(MyValueService/MyValueServiceSOAP)"/>
  </service>

  <component name="MyValueServiceComponent">
    <implementation.java
      class="services.myvalue.MyValueServiceImpl"/>
    <property name="currency">EURO</property>
    <service name="MyValueService"/>
    <reference name="customerService"/>
    <reference name="stockQuoteService"/>
  </component>

  ...

</composite>
```

[Snippet 55-3: Example composite with a service](#)

5.2 Reference

The **references of a composite** are defined by **promoting** references defined by components contained in the composite. Each promoted reference indicates that the component reference needs to be resolved by services outside the composite. A component reference is promoted using a composite **reference element**.

A composite reference is represented by a **reference element** which is a child of a composite element. There can be **zero or more** reference elements in a composite. [The following snippet Snippet 5-4 Snippet 5-4](#) shows the composite **pseudo**-schema with the **pseudo**-schema for a **reference** element-:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Composite Reference schema snippet -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912" ... >
  ...
  <reference name="xs:NCName" target="list of xs:anyURI"?
    promote="list of xs:anyURI" wiredByImpl="xs:boolean"?
    multiplicity="0..1 or 1..1 or 0..n or 1..n"?
    requires="list of xs:QName"? policySets="list of xs:QName"?>*
    <interface ... />?
    <binding ... />*
    <callback>?
    <binding ... />+
  </callback>
  <requires/>*
  <policySetAttachment/>*
</reference>
  ...
</composite>
```

[Snippet 55-4: composite Psuedo-Schema with reference Child Element](#)

The **composite reference** element has the **following attributes**:

- **name : NCName (1..1)** – the name of the reference. [The name of a composite <reference/> element MUST be unique across all the composite references in the composite. The name of a composite <reference/> element MUST be unique across all the composite references in the composite. \[ASM60006\]](#) The name of the composite reference can be different than the name of the promoted component reference.
- **promote : anyURI (1..n)** – identifies one or more promoted component references. The value is a list of values of the form <component-name>/<reference-name> separated by spaces. The reference name can be omitted if the component has only one reference. [Each of the URIs declared by a composite reference's @promote attribute MUST identify a component reference within the composite. Each of the URIs declared by a composite reference's @promote attribute MUST identify a component reference within the composite. \[ASM60007\] <include/> processing MUST take place before the processing of the @promote attribute of a composite reference is performed. <include/> processing MUST take place before the processing of the @promote attribute of a composite reference is performed. \[ASM60037\]](#)

The same component reference can be promoted more than once, using different composite references, but only if the multiplicity defined on the component reference is 0..n or 1..n. The multiplicity on the composite reference can restrict accordingly.

Where a composite reference promotes two or more component references:

- [the interfaces of the component references promoted by a composite reference MUST be the same, or if the composite reference itself declares an interface then all each of the component reference interfaces MUST be a compatible subset of the composite reference interface. Compatible means that, the interfaces of the component references promoted by a composite](#)

reference interface is **MUST** be the same, or is a strict if the composite reference itself declares an interface then each of the component reference interfaces **MUST** be a compatible subset of the composite reference interface.. [ASM60008]

- the intents declared on a composite reference and on the component references which it promotes **MUST NOT** be mutually exclusive. the intents declared on a composite reference and on the component references which it promotes **MUST NOT** be mutually exclusive. [ASM60009]

The intents which apply to the composite reference in this case are the union of the intents specified for each of the promoted component references plus any intents declared on the composite reference itself. **If any intents in the set which apply to a composite reference are mutually exclusive then the SCA runtime **MUST** raise an error.** If any intents in the set which apply to a composite reference are mutually exclusive then the SCA runtime **MUST** raise an error. [ASM60010]

- requires** : **QNameListOfQNames (0..n1)** – a list of policy intents. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute. Specified intents add to or further qualify the intents defined for the promoted component reference.
- policySets** : **QNameListOfQNames (0..n1)** – a list of policy sets. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute.
- multiplicity** : **(01..1)** - Defines the number of wires that can connect the reference to target services. **When present, the The multiplicity of a composite reference is always specified explicitly and** can have one of the following values
 - 0..1 – zero or one wire can have the reference as a source
 - 1..1 – one wire can have the reference as a source
 - 0..n - zero or more wires can have the reference as a source
 - 1..n – one or more wires can have the reference as a source

The default value for the @multiplicity attribute is 1..1.

The value specified for the **@multiplicity** attribute of a composite reference **MUST** be compatible with the multiplicity specified on each of the promoted component references, i.e. the multiplicity has to be equal or further restrict. So multiplicity 0..1 can be used where the promoted component reference has multiplicity 0..n, multiplicity 1..1 can be used where the promoted component reference has multiplicity 0..n or 1..n and multiplicity 1..n can be used where the promoted component reference has multiplicity 0..n. However, a composite reference of multiplicity 0..n or 1..n cannot be used to promote a component reference of multiplicity 0..1 or 1..1 respectively. The value specified for the **@multiplicity** attribute of a composite reference **MUST** be compatible with the multiplicity specified on each of the promoted component references, i.e. the multiplicity has to be equal or further restrict. So multiplicity 0..1 can be used where the promoted component reference has multiplicity 0..n, multiplicity 1..1 can be used where the promoted component reference has multiplicity 0..n or 1..n and multiplicity 1..n can be used where the promoted component reference has multiplicity 0..n. However, a composite reference of multiplicity 0..n or 1..n cannot be used to promote a component reference of multiplicity 0..1 or 1..1 respectively. The multiplicity of a composite reference **MUST** be equal to or further restrict the multiplicity of each of the component references that it promotes, with the exception that the multiplicity of the composite reference does not have to require a target if there is already a target on the component reference. This means that a component reference with multiplicity 1..1 and a target can be promoted by a composite reference with multiplicity 0..1, and a component reference with multiplicity 1..n and one or more targets can be promoted by a composite reference with multiplicity 0..n or 0..1. The multiplicity of a composite reference **MUST** be equal to or further restrict the multiplicity of each of the component references that it promotes, with the exception that the

multiplicity of the composite reference does not have to require a target if there is already a target on the component reference. This means that a component reference with multiplicity 1..1 and a target can be promoted by a composite reference with multiplicity 0..1, and a component reference with multiplicity 1..n and one or more targets can be promoted by a composite reference with multiplicity 0..n or 0..1. [ASM60011]

The valid values for composite reference multiplicity are shown in the following tables:

<u>Composite Reference multiplicity</u>	<u>Component Reference multiplicity</u> (where there are no targets declared)			
	<u>0..1</u>	<u>1..1</u>	<u>0..n</u>	<u>1..n</u>
<u>0..1</u>	<u>YES</u>	<u>NO</u>	<u>YES</u>	<u>NO</u>
<u>1..1</u>	<u>YES</u>	<u>YES</u>	<u>YES</u>	<u>YES</u>
<u>0..n</u>	<u>NO</u>	<u>NO</u>	<u>YES</u>	<u>NO</u>
<u>1..n</u>	<u>NO</u>	<u>NO</u>	<u>YES</u>	<u>YES</u>

<u>Composite Reference multiplicity</u>	<u>Component Reference multiplicity</u> (where there are targets declared)			
	<u>0..1</u>	<u>1..1</u>	<u>0..n</u>	<u>1..n</u>
<u>0..1</u>	<u>YES</u>	<u>YES</u>	<u>YES</u>	<u>YES</u>
<u>1..1</u>	<u>YES</u>	<u>YES</u>	<u>YES</u>	<u>YES</u>
<u>0..n</u>	<u>NO</u>	<u>NO</u>	<u>YES</u>	<u>YES</u>
<u>1..n</u>	<u>NO</u>	<u>NO</u>	<u>YES</u>	<u>YES</u>

- **target : anyURI (0..n)** – a list of one or more of target service URI's, depending on multiplicity setting. Each value wires the reference to a service in a composite that uses the composite containing the reference as an implementation for one of its components. For more details on wiring see [the section on Wires](#).
- **wiredByImpl : boolean (0..1)** – a boolean value. If set to "true" it indicates that the target of the reference is set at runtime by the implementation code (for example by the code obtaining an endpoint reference by some means and setting this as the target of the reference through the use of programming interfaces defined by the relevant Client and Implementation specification). If "true" is set, then the reference is not intended to be wired statically within a using composite, but left unwired. All the component references promoted by a single composite reference MUST have the same value for @wiredByImpl. All the component references promoted by a single composite reference MUST have the same value for @wiredByImpl. [ASM60035] If the @wiredByImpl attribute is not specified on the composite reference, the default value is "true" if all of the promoted component references have a wiredByImpl value of "true", and the default value is "false" if all the promoted component references have a wiredByImpl value of "false". If the @wiredByImpl attribute is specified, its value MUST be "true" if all of the promoted component references have a wiredByImpl value of "true", and its value MUST be "false" if all the promoted component references have a wiredByImpl value of "false". If the @wiredByImpl attribute is not specified on the composite reference, the default value is "true" if all of the promoted component references have a wiredByImpl value of "true", and the default

value is "false" if all the promoted component references have a `wiredByImpl` value of "false". If the `@wiredByImpl` attribute is specified, its value MUST be "true" if all of the promoted component references have a `wiredByImpl` value of "true", and its value MUST be "false" if all the promoted component references have a `wiredByImpl` value of "false". [ASM60036]

The **composite reference** element has the following **child elements**, whatever is not specified is defaulted from the promoted component reference(s).

- **interface : Interface (0..1) - zero or one interface element** which declares an interface for the composite reference. If a composite reference has an interface specified, it MUST provide an interface which is the same or which is a compatible superset of the interface(s) declared by the promoted component reference(s), i.e. provide a superset of the operations in the interface defined by the component for the reference. If a composite reference has an interface specified, it MUST provide an interface which is the same or which is a compatible superset of the interface(s) declared by the promoted component reference(s), i.e. provide a superset of the operations in the interface defined by the component for the reference. If a composite reference has an **interface** specified, it MUST provide an interface which is the same or which is a compatible superset of the interface(s) declared by the promoted component reference(s), i.e. provide a superset of the operations in the interface defined by the component for the reference. [ASM60012] If no interface is declared on a composite reference, the interface from one of its promoted component references is used, which MUST be used for the same as or a compatible superset of component type associated with the composite. If no interface(s) is declared by on a composite reference, the interface from one of its promoted component reference(s) MUST be used for the component type associated with the composite. [ASM60013] For details on the interface element see [the Interface section](#).
- **binding : Binding (0..n)** - A reference element has zero or more **binding elements** as children. If one or more **bindings** are specified they **override** any and all of the bindings defined for the promoted component reference from the composite reference perspective. The bindings defined on the component reference are still in effect for local wires within the composite that have the component reference as their source. Details of the binding element are described in the [Bindings section](#). For more details on wiring see [the section on Wires](#).
- A reference identifies zero or more target services which satisfy the reference. This can be done in a number of ways, which are fully described in section "[Specifying the Target Service\(s\) for a Reference](#)".
- **callback (0..1) / binding : Binding (1..n)** - A **callback** element is used if the interface has a callback defined and the callback element has one or more **binding** elements as subelements. The **callback** and its binding subelements are specified if there is a need to have binding details used to handle callbacks. Callback binding elements attached to the composite reference override any callback binding elements defined on any of the promoted component references. If the callback element is not present on the composite service, any callback binding elements that are declared on all the promoted references are used. If the callback element is not present at all, the behaviour is runtime implementation dependent.
- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

5.2.1 Example Reference

The following figure [Figure 5-3](#) shows the reference symbol that is used to represent a reference in an assembly diagram.

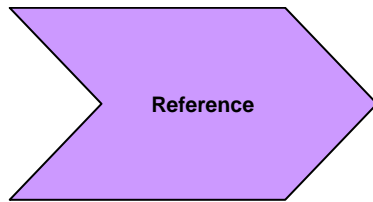


Figure 955-3: Reference symbol

The following figureFigure 5-4Figure 5-4 shows the assembly diagram for the MyValueComposite containing the reference CustomerService and the reference StockQuoteService.

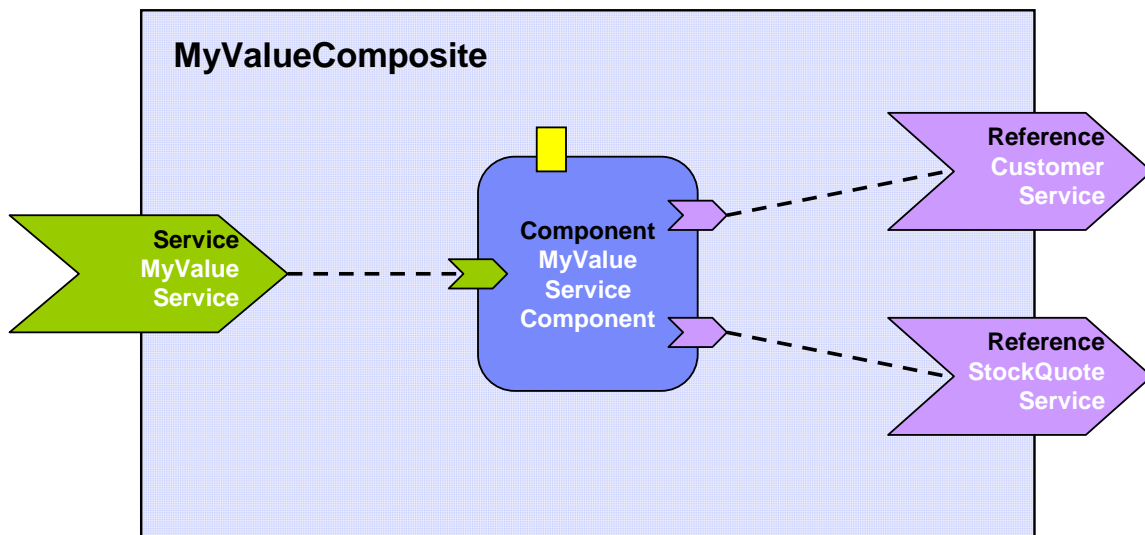


Figure 4055-4: MyValueComposite showing References

The following snippetSnippet 5-5Snippet 5-5 shows the MyValueComposite.composite file for the MyValueComposite containing the reference elements for the CustomerService and the StockQuoteService. The reference CustomerService is bound using the SCA binding. The reference StockQuoteService is bound using the Web service binding. The endpoint addresses of the bindings can be specified, for example using the binding `@uri` attribute (for details see the Bindings section), or overridden in an enclosing composite. Although in this case the reference StockQuoteService is bound to a Web service, its interface is defined by a Java interface, which was created from the WSDL portType of the target web service.

```
<?xml version="1.0" encoding="ASCII"?>
<!-- MyValueComposite_3 example -->
<composite      xmlns="http://docs.oasis-open.org/ns/opencsa/scs/200903200912"
                targetNamespace="http://foo.com"
                name="MyValueComposite" >

    ...

    <component name="MyValueServiceComponent">
        <implementation.java
            class="services.myvalue.MyValueServiceImpl"/>
        <property name="currency">EURO</property>
        <reference name="customerService"/>
        <reference name="stockQuoteService"/>
    </component>
</composite>
```

```

1857 </component>
1858
1859 <reference name="CustomerService"
1860     promote="MyValueServiceComponent/customerService">
1861     <interface.java interface="services.customer.CustomerService"/>
1862     <!-- The following forces the binding to be binding.sca -->
1863     <!-- whatever is specified by the component reference or -->
1864     <!-- by the underlying implementation -->
1865     <binding.sca/>
1866 </reference>
1867
1868 <reference name="StockQuoteService"
1869     promote="MyValueServiceComponent/stockQuoteService">
1870     <interface.java
1871         interface="services.stockquote.StockQuoteService"/>
1872     <binding.ws
1873 portwsdlElement="http://www.stockquote.org/StockQuoteService#
1874 wsdl.endpointport (StockQuoteService/StockQuoteServiceSOAP)"/>
1875 </reference>
1876
1877 ...
1878
1879 </composite>

```

Snippet 55-5: Example composite with a reference

5.3 Property

Properties allow for the configuration of an implementation with externally set data values. A composite can declare zero or more properties. Each property has a type, which is either simple or complex. An implementation can also define a default value for a property. Properties can be configured with values in the components that use the implementation.

~~The declaration of a property in a composite follows the form described in the following schema snippet:~~

~~Snippet 5-6~~ Snippet 5-6 shows the composite pseudo-schema with the pseudo-schema for a **reference** element:

```

1891 <?xml version="1.0" encoding="ASCII"?>
1892 <!-- Composite Property schema snippet -->
1893 <composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912" ... >
1894 ...
1895 <property name="xs:NCName" (type="xs:QName" | element="xs:QName")
1896     requires="list of xs:QName"?
1897     policySets="list of xs:QName"?
1898     many="xs:boolean"? mustSupply="xs:boolean"?>*
1899     default-property-value?
1900 </property>
1901 ...
1902 </composite>

```

Snippet 55-6: composite Psuedo-Schema with property Child Element

The **composite property** element has the ~~following attributes~~:

- **name : NCName (1..1)** - the name of the property. **The @name attribute of a composite property MUST be unique amongst the properties of the same composite. The @name attribute of a composite property MUST be unique amongst the properties of the same composite. [ASM60014]**
- **one of (1..1):**

- 1910 ~~⊖~~ **type** : *QName* – the type of the property - the qualified name of an XML schema type
- 1911 ~~⊖~~ **element** : *QName* – the type of the property defined as the qualified name of an XML schema
- 1912 global element – the type is the type of the global element

1913 ~~A single property element MUST NOT contain both a @type attribute and an @element~~

1914 ~~attribute. A single property element MUST NOT contain both a @type attribute and an~~

1915 ~~@element attribute. [ASM60040]~~

- 1916 • **many** : *boolean (0..1)* - whether the property is single-valued (false) or multi-valued (true). The
- 1917 default is **false**. In the case of a multi-valued property, it is presented to the implementation as a
- 1918 collection of property values.
- 1919 • **mustSupply** : *boolean (0..1)* – whether the property value has to be supplied by the component that
- 1920 uses the composite – when mustSupply="true" the component has to supply a value since the
- 1921 composite has no default value for the property. A default-property-value is only worth declaring
- 1922 when mustSupply="false" (the default setting for the @mustSupply attribute), since the implication of
- 1923 a default value is that it is used only when a value is not supplied by the using component.
- 1924 ~~*requires~~ : *QName (0..n)* – a list of policy intents. See the Policy Framework specification [10] for
- 1925 ~~a description of this attribute.~~
- 1926 ~~*policySets~~ : *QName (0..n)* – a list of policy sets. See the Policy Framework specification [10] for
- 1927 ~~a description of this attribute.~~

1928

1929 The property element can contain a **default-property-value**, which provides default value for the

1930 property. The form of the default property value is as described in the section on Component Property.

1931

1932 Implementation types other than **composite** can declare properties in an implementation-dependent form

1933 (e.g. annotations within a Java class), or through a property declaration of exactly the form described

1934 above in a componentType file.

1935 Property values can be configured when an implementation is used by a component. The form of the

1936 property configuration is shown in the section on Components.

1937 5.3.1 Property Examples

1938 For the ~~following~~ example of Property declaration and value setting in Snippet 5-8 Snippet 5-8, the

1939 ~~following~~ complex type in Snippet 5-7 Snippet 5-7 is used as an example:

```
1941 <xsd:schema xmlns="http://www.w3.org/2001/XMLSchema"
1942             targetNamespace="http://foo.com/"
1943             xmlns:tns="http://foo.com/">
1944   <!-- ComplexProperty schema -->
1945   <xsd:element name="fooElement" type="tns:MyComplexType"/>
1946   <xsd:complexType name="MyComplexType">
1947     <xsd:sequence>
1948       <xsd:element name="a" type="xsd:string"/>
1949       <xsd:element name="b" type="xsd:anyURI"/>
1950     </xsd:sequence>
1951     <attribute name="attr" type="xsd:string" use="optional"/>
1952   </xsd:complexType>
1953 </xsd:schema>
```

1954 Snippet 55-7: Complex Type for Snippet 5-8 Snippet 5-8

1955

1956 The following composite demonstrates the declaration of a property of a complex type, with a default value,

1957 plus it demonstrates the setting of a property value of a complex type within a component:


```

1959 <?xml version="1.0" encoding="ASCII"?>
1960 <composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
1961           xmlns:foo="http://foo.com"
1962           targetNamespace="http://foo.com"
1963           name="AccountServices">
1964   <!-- AccountServices Example1 -->
1965
1966   ...
1967
1968   <property name="complexFoo" type="foo:MyComplexType">
1969     <value>
1970       <foo:a>AValue</foo:a>
1971       <foo:b>InterestingURI</foo:b>
1972     </value>
1973   </property>
1974
1975   <component name="AccountServiceComponent">
1976     <implementation.java class="foo.AccountServiceImpl"/>
1977     <property name="complexBar" source="$complexFoo"/>
1978     <reference name="accountDataService"
1979       target="AccountDataServiceComponent"/>
1980     <reference name="stockQuoteService" target="StockQuoteService"/>
1981   </component>
1982
1983   ...
1984
1985 </composite>

```

Snippet 55-8: Example property with a Complex Type

In the declaration of the property named **complexFoo** in the composite **AccountServices**, the property is defined to be of type **foo:MyComplexType**. The namespace **foo** is declared in the composite and it references the example XSD, where **MyComplexType** is defined. The declaration of **complexFoo** contains a default value. This is declared as the content of the property element. In this example, the default value consists of the element **value** which is of type **foo:MyComplexType** and it has two child elements **<foo:a>** and **<foo:b>**, following the definition of **MyComplexType**.

In the component **AccountServiceComponent**, the component sets the value of the property **complexBar**, declared by the implementation configured by the component. In this case, the type of **complexBar** is **foo:MyComplexType**. The example shows that the value of the **complexBar** property is set from the value of the **complexFoo** property – the **@source** attribute of the property element for **complexBar** declares that the value of the property is set from the value of a property of the containing composite. The value of the **@source** attribute is **\$complexFoo**, where **complexFoo** is the name of a property of the composite. This value implies that the whole of the value of the source property is used to set the value of the component property.

The following example **Snippet 5-9** illustrates the setting of the value of a property of a simple type (a string) from **part** of the value of a property of the containing composite which has a complex type:

```

2005 <?xml version="1.0" encoding="ASCII"?>
2006 <composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
2007           xmlns:foo="http://foo.com"
2008           targetNamespace="http://foo.com"
2009           name="AccountServices">
2010   <!-- AccountServices Example2 -->
2011
2012   ...
2013
2014   <property name="complexFoo" type="foo:MyComplexType">
2015     <value>
2016       <foo:a>AValue</foo:a>

```

```

        <foo:b>InterestingURI</foo:b>
    </value>
</property>

    <component name="AccountServiceComponent">
        <implementation.java class="foo.AccountServiceImpl"/>
        <property name="currency" source="$complexFoo/a"/>
        <reference name="accountDataService"
            target="AccountDataServiceComponent"/>
        <reference name="stockQuoteService" target="StockQuoteService"/>
    </component>

    ...
</composite>

```

Snippet 55-9: Example property with a Simple Type

In ~~this the~~ example in [Snippet 5-9](#), the component **AccountServiceComponent** sets the value of a property called **currency**, which is of type string. The value is set from a property of the composite **AccountServices** using the @source attribute set to **\$complexFoo/a**. This is an XPath expression that selects the property name **complexFoo** and then selects the value of the **a** subelement of the value of complexFoo. The "a" subelement is a string, matching the type of the currency property.

Further examples of declaring properties and setting property values in a component follow:

– Declaration of a property with a simple type and a default value:

```

<property name="SimpleTypeProperty" type="xsd:string">
    <value>MyValue</value>
</property>

```

Snippet 55-10: Example property with a Simple Type and Default Value

– Declaration of a property with a complex type and a default value:

```

<property name="complexFoo" type="foo:MyComplexType">
    <value>
        <foo:a>AValue</foo:a>
        <foo:b>InterestingURI</foo:b>
    </value>
</property>

```

Snippet 55-11: Example property with a Complex Type and Default Value

– Declaration of a property with a global element type:

```

<property name="elementFoo" element="foo:fooElement">
    <foo:fooElement>
        <foo:a>AValue</foo:a>
        <foo:b>InterestingURI</foo:b>
    </foo:fooElement>
</property>

```

Snippet 55-12: Example property with a Global Element Type

5.4 Wire

SCA wires within a composite connect source component references to target component services.

One way of defining a wire is by **configuring a reference of a component using its @target attribute**. The reference element is configured with the wire-target-URI of the service(s) that resolve the reference. Multiple target services are valid when the reference has a multiplicity of 0..n or 1..n.

An alternative way of defining a Wire is by means of a **wire element** which is a child of the composite element. There can be **zero or more** wire elements in a composite. This alternative method for defining wires is useful in circumstances where separation of the wiring from the elements the wires connect helps simplify development or operational activities. An example is where the components used to build a Domain are relatively static but where new or changed applications are created regularly from those components, through the creation of new assemblies with different wiring. Deploying the wiring separately from the components allows the wiring to be created or modified with minimum effort.

Note that a Wire specified via a wire element is equivalent to a wire specified via the @target attribute of a reference. The rule which forbids mixing of wires specified with the @target attribute with the specification of endpoints in binding subelements of the reference also applies to wires specified via separate wire elements.

The following snippet [Snippet 5-13](#) shows the composite [pseudo-schema](#) with the [pseudo-schema](#) for the [reference elements of components and composite services and the](#) wire child element:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Wires schema snippet -->
<composite ...>
  ...
  <wire source="xs:anyURI" target="xs:anyURI" replace="xs:boolean"?/>*
  ...
</composite>
```

[Snippet 55-13: composite Psuedo-Schema with wire Child Element](#)

The **reference element of a component** has a list of one or more of the following **wire-target-URI** values for the target, with multiple values separated by a space:

- `<component-name>/<service-name>`

- where the target is a service of a component. The service name can be omitted if the target component only has one service with a compatible interface

The **wire element** has the following attributes:

- **source (1..1)** — names the source component reference. Valid URI schemes are:

- `<component-name>/<reference-name>`

- `<component-name>[/<service-name>]/?]?`

- `<component-name>` is the name of the target component.

- `<service-name>` is the name of the target service within the component.

If `<service-name>` is present, the component service with @name corresponding to `<service-name>` MUST be used for the wire. If `<service-name>` is present, the component service with @name corresponding to `<service-name>` MUST be used for the wire. [ASM60046]

If there is no component service with @name corresponding to `<service-name>`, the SCA runtime MUST raise an error. If there is no component service with @name corresponding to `<service-name>`, the SCA runtime MUST raise an error. [ASM60047]

If `<service-name>` is not present, the target component MUST have one and only one service with an interface that is a compatible superset of the wire source's interface and satisfies the policy requirements of the wire source, and the SCA runtime MUST use this service for the wire. If `<service-name>` is not present, the target component MUST have one and only one service with an interface that is a compatible superset

2116 of the wire source's interface and satisfies the policy requirements of the wire
 2117 source, and the SCA runtime MUST use this service for the wire. [ASM60048]

2118 o <binding-name> is the name of the service's binding to use. The <binding-name>
 2119 can be the default name of a binding element (see section 8 "Binding").

2120

2121 If <binding-name> is present, the <binding/> subelement of the target service with
 2122 @name corresponding to <binding-name> MUST be used for the wire. If <binding-
 2123 name> is present, the <binding/> subelement of the target service with @name
 2124 corresponding to <binding-name> MUST be used for the wire. [ASM60049] If there is
 2125 no <binding/> subelement of the target service with @name corresponding to
 2126 <binding-name>, the SCA runtime MUST raise an error. If there is no <binding/>
 2127 subelement of the target service with @name corresponding to <binding-name>, the
 2128 SCA runtime MUST raise an error. [ASM60050] If <binding-name> is not present
 2129 and the target service has multiple <binding/> subelements, the SCA runtime MUST
 2130 choose one and only one of the <binding/> elements which satisfies the mutual policy
 2131 requirements of the reference and the service, and the SCA runtime MUST use this
 2132 binding for the wire. If <binding-name> is not present and the target service has
 2133 multiple <binding/> subelements, the SCA runtime MUST choose one and only one
 2134 of the <binding/> elements which satisfies the mutual policy requirements of the
 2135 reference and the service, and the SCA runtime MUST use this binding for the wire.
 2136 [ASM60051]

2137

2138 The **wire element** has the attributes:

2139 • **source (1..1)** – names the source component reference. The valid URI scheme is:

2140 – <component-name>[/<reference-name>]?

2141 i.e. where the source is a component reference. The reference name can be omitted if the
 2142 source component only has one reference

2143 • **target (1..1)** – names the target component service. ~~Valid~~The valid URI schemes are

2144 o <component-name>/<service-name>

2145 *where scheme is the target is a service of a component. The service name can
 2146 be omitted if same as the target component only has one service with a
 2147 compatible interface

2148 • **defined for component references above.**

2149 • **replace (0..1)** - a boolean value, with the default of "false". When a wire element has
 2150 @replace="false", the wire is added to the set of wires which apply to the reference identified by the
 2151 @source attribute. When a wire element has @replace="true", the wire is added to the set of wires
 2152 which apply to the reference identified by the @source attribute - but any wires for that reference
 2153 specified by means of the @target attribute of the reference are removed from the set of wires which
 2154 apply to the reference.

2155
 2156

2157 2. In other words, if any <wire/> element with @replace="true" is used for a particular reference, the
 2158 value of the @target attribute on the reference is ignored - and this permits existing wires on the
 2159 reference to be overridden by separate configuration, where the reference is on a component at the
 2160 Domain level.

2161 <include/> processing MUST take place before the @source and @target attributes of a wire are
 2162 resolved. <include/> processing MUST take place before the @source and @target attributes of a wire are
 2163 resolved. [ASM60039]

2164 For a composite used as a component implementation, wires can only link sources and targets that are
 2165 contained in the same composite (irrespective of which file or files are used to describe the composite).

2166 Wiring to entities outside the composite is done through services and references of the composite with
 2167 wiring defined by the next higher composite.

2168 ~~A wire can only connect a source to a target if the target implements an interface that is compatible~~
 2169 ~~with the interface declared by the source. The source and the target are compatible if the target~~
 2170 ~~interface is a **compatible superset** of the source interface, defined as follows:~~

- 2171 ~~1. the source~~ The interface ~~and declared by the target~~ interface of a wire ~~MUST either both be~~
 2172 ~~removable or else both~~ a compatible superset of the interface declared by the source of the
 2173 ~~wire. The interface declared by the target of a wire MUST be local~~ compatible superset of the
 2174 ~~interface declared by the source of the wire. [ASM60015]~~
- 2175 ~~2. the operations on the target interface of a wire MUST be the same as or be a superset of the~~
 2176 ~~operations in the interface specified on the source [ASM60016]~~
- 2177 ~~3. compatibility between the source interface and the target interface for a wire for the individual~~
 2178 ~~operations is defined as compatibility of the signature, that is operation name, input types,~~
 2179 ~~and output types MUST be the same. [ASM60017]~~
- 2180 ~~4. the order of the input and output types for operations in the source interface and the target~~
 2181 ~~interface of a wire also MUST be the same. [ASM60018]~~
- 2182 ~~5. the set of Faults and Exceptions expected by each operation in the source interface MUST be~~
 2183 ~~the same or be a superset of those specified by the target interface. [ASM60019]~~

2184 ~~If either the source interface of a wire or the target interface of a wire declares a callback interface~~
 2185 ~~then both the source interface and the target interface MUST declare a callback interface and the~~
 2186 ~~callback interface declared on the target MUST be a compatible superset of the callback interface~~
 2187 ~~declared on the source. [ASM60020]~~

2188 [ASM60043] See the section on Interface Compatibility for a definition of "compatible superset".

2189 A Wire can connect between different interface languages (e.g. Java interfaces and WSDL portTypes) in
 2190 either direction, as long as the operations defined by the two interface types are equivalent. They are
 2191 equivalent if the operation(s), parameter(s), return value(s) and faults/exceptions map to each other.

2192 Service clients cannot (portably) ask questions at runtime about additional interfaces that are provided by
 2193 the implementation of the service (e.g. the result of "instance of" in Java is non portable). It is valid for an
 2194 SCA implementation to have proxies for all wires, so that, for example, a reference object passed to an
 2195 implementation might only have the business interface of the reference and might not be an instance of
 2196 the (Java) class which is used to implement the target service, even where the interface is local and the
 2197 target service is running in the same process.

2198 **Note:** It is permitted to deploy a composite that has references that are not wired. For the case of an un-
 2199 wired reference with multiplicity 1..1 or 1..n the deployment process provided by an SCA runtime
 2200 SHOULD issue a warning. [ASM60021]

2202 5.4.1 Wire Examples

2203 ~~The following figure~~ Figure 5-5: MyValueComposite2 showing Wires ~~Figure 5-5: MyValueComposite2~~
 2204 showing Wires shows the assembly diagram for the MyValueComposite2 containing wires between
 2205 service, components and references.

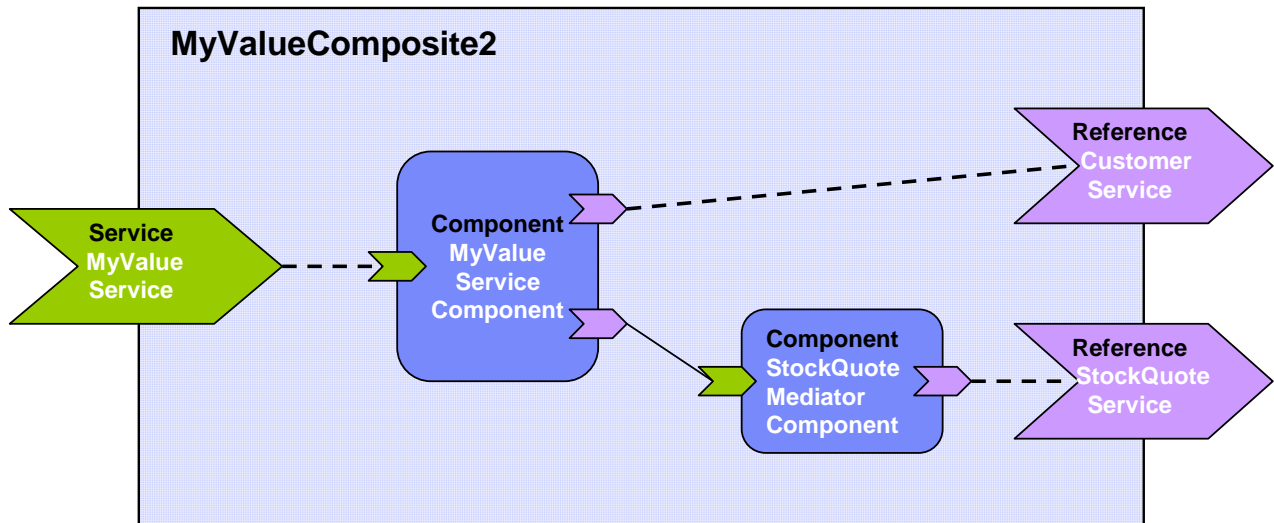


Figure 4455-5: MyValueComposite2 showing Wires

The following snippet

Snippet 5-14: Example composite with a wire Snippet 5-14: Example composite with a wire shows the MyValueComposite2.composite file for the MyValueComposite2 containing the configured component and service references. The service MyValueService is wired to the MyValueServiceComponent, using an explicit <wire/> element. The MyValueServiceComponent's customerService reference is wired to the composite's CustomerService reference. The MyValueServiceComponent's stockQuoteService reference is wired to the StockQuoteMediatorComponent, which in turn has its reference wired to the StockQuoteService reference of the composite.

```
<?xml version="1.0" encoding="ASCII"?>
<!-- MyValueComposite Wires examples -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://foo.com"
  name="MyValueComposite2" >

  <service name="MyValueService" promote="MyValueServiceComponent">
    <interface.java interface="services.myvalue.MyValueService"/>
    <binding.ws portType="http://www.myvalue.org/MyValueService#"
      wsdl:endpoint="http://www.myvalue.org/MyValueServiceSOAP"/>
  </service>

  <component name="MyValueServiceComponent">
    <implementation.java class="services.myvalue.MyValueServiceImpl"/>
    <property name="currency">EURO</property>
    <service name="MyValueService"/>
    <reference name="customerService"/>
    <reference name="stockQuoteService"/>
  </component>

  <wire source="MyValueServiceComponent/stockQuoteService"
    target="StockQuoteMediatorComponent"/>

  <component name="StockQuoteMediatorComponent">
    <implementation.java class="services.myvalue.SQMediatorImpl"/>
    <property name="currency">EURO</property>
    <reference name="stockQuoteService"/>
  </component>
</composite>
```

```

2248     <reference name="CustomerService"
2249         promote="MyValueServiceComponent/customerService">
2250         <interface.java interface="services.customer.CustomerService"/>
2251         <binding.sca/>
2252     </reference>
2253
2254     <reference name="StockQuoteService"
2255         promote="StockQuoteMediatorComponent">
2256         <interface.java
2257             interface="services.stockquote.StockQuoteService"/>
2258         <binding.ws
2259             portwsdlElement="http://www.stockquote.org/StockQuoteService#
2260             wsdl.endpoint (StockQuoteService/StockQuoteServiceSOAP)"/>
2261     </reference>
2262
2263 </composite>

```

Snippet 55-14: Example composite with a wire

5.4.2 Autowire

SCA provides a feature named **Autowire**, which can help to simplify the assembly of composites. Autowire enables component references to be automatically wired to component services which will satisfy those references, without the need to create explicit wires between the references and the services. When the autowire feature is used, a component reference which is not promoted and which is not explicitly wired to a service within a composite is automatically wired to a target service within the same composite. Autowire works by searching within the composite for a service interface which matches the interface of the references.

The autowire feature is not used by default. Autowire is enabled by the setting of an @autowire attribute to "true". Autowire is disabled by setting of the @autowire attribute to "false" The @autowire attribute can be applied to any of the following elements within a composite:

- reference
- component
- composite

Where an element does not have an explicit setting for the @autowire attribute, it inherits the setting from its parent element. Thus a reference element inherits the setting from its containing component. A component element inherits the setting from its containing composite. Where there is no setting on any level, autowire="false" is the default.

As an example, if a composite element has autowire="true" set, this means that autowiring is enabled for all component references within that composite. In this example, autowiring can be turned off for specific components and specific references through setting autowire="false" on the components and references concerned.

For each component reference for which autowire is enabled, the SCA runtime MUST search within the composite for target services which have an interface that is a compatible superset of the interface of the reference. For each component reference for which autowire is enabled, the SCA runtime MUST search within the composite for target services which have an interface that is a compatible superset of the interface of the reference. [ASM60022] "Compatible" here means:

- the target service interface MUST be a compatible superset of the reference interface when using autowire to wire a reference (as defined in the section on Wires) the target service interface MUST be a compatible superset of the reference interface when using autowire to wire a reference (as defined in the section on Wires) The intents, and policies applied to the service MUST be compatible with those on the reference when using autowire to wire a reference – so that wiring the reference to the service will not cause an error due to policy mismatch The intents, and policies applied to the service MUST be compatible with those on the reference when using autowire to wire a reference – so that wiring the reference to the service will not cause an error due to policy mismatch [ASM60023]

2301 • the intents, and policies applied to the service MUST be compatible with those on the reference
2302 when using autowire to wire a reference — so that wiring the reference to the service will not
2303 cause an error due to policy mismatch [ASM60024] (see the Policy Framework specification
2304 [10] for details)

2305 [ASM60024] (see the Policy Framework specification [SCA-POLICY] for details)

2306 If the search finds **1 or more** valid target service for a particular reference, the action taken depends on
2307 the multiplicity of the reference:

- 2308 • for an autowire reference with multiplicity 0..1 or 1..1, the SCA runtime MUST wire the reference to
2309 one of the set of valid target services chosen from the set in a runtime-dependent fashion for an
2310 autowire reference with multiplicity 0..1 or 1..1, the SCA runtime MUST wire the reference to one of
2311 the set of valid target services chosen from the set in a runtime-dependent fashion [ASM60025]
- 2312 • for an autowire reference with multiplicity 0..n or 1..n, the reference MUST be wired to all of the set of
2313 valid target services for an autowire reference with multiplicity 0..n or 1..n, the reference MUST be
2314 wired to all of the set of valid target services [ASM60026]

2315 If the search finds **no** valid target services for a particular reference, the action taken depends on the
2316 multiplicity of the reference:

- 2317 • for an autowire reference with multiplicity 0..1 or 0..n, if the SCA runtime finds no valid target service,
2318 there is no problem — no services are wired and the SCA runtime MUST NOT raise an error for an
2319 autowire reference with multiplicity 0..1 or 0..n, if the SCA runtime finds no valid target service, there
2320 is no problem — no services are wired and the SCA runtime MUST NOT raise an error [ASM60027]
- 2321 • for an autowire reference with multiplicity 1..1 or 1..n, if the SCA runtime finds no valid target services
2322 an error MUST be raised by the SCA runtime since the reference is intended to be wired for an
2323 autowire reference with multiplicity 1..1 or 1..n, if the SCA runtime finds no valid target services an
2324 error MUST be raised by the SCA runtime since the reference is intended to be wired [ASM60028]

2325

2326 5.4.3 Autowire Examples

2327 This example demonstrates Snippet 5-15 Snippet 5-15 and Snippet 5-16 Snippet 5-16 demonstrate two
2328 versions of the same composite — the first version is done using explicit wires, with no autowiring used,
2329 the second version is done using autowire. In both cases the end result is the same — the same wires
2330 connect the references to the services.

2331 First, here Figure 5-6 Figure 5-6 is a diagram for the composite:

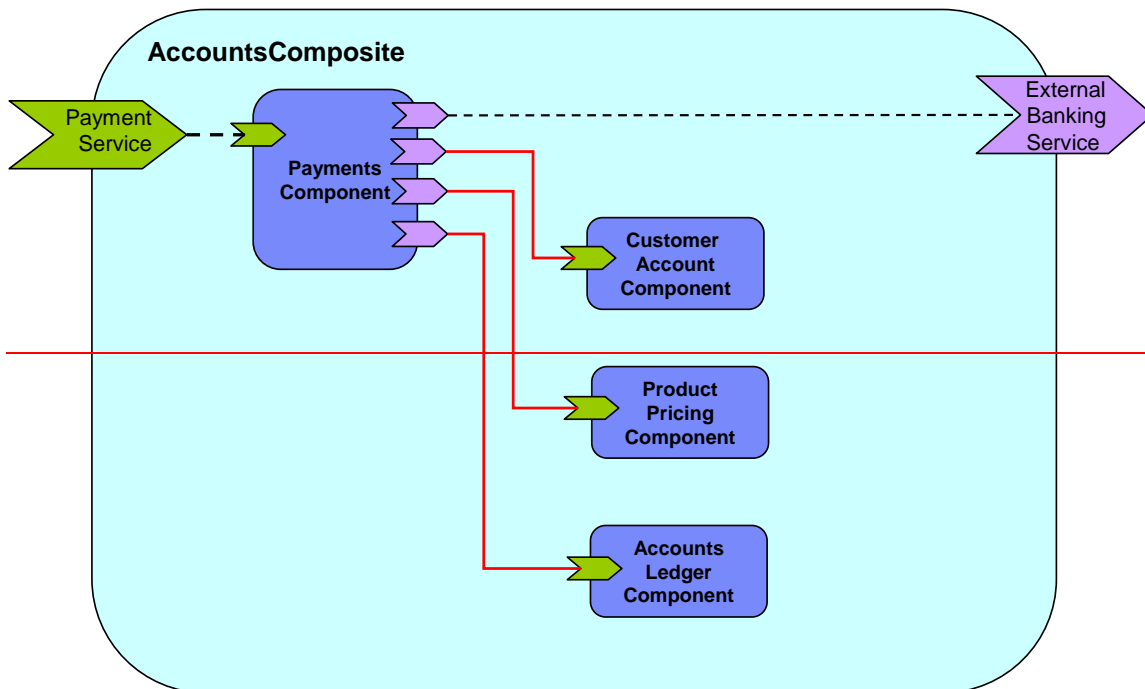


Figure 12

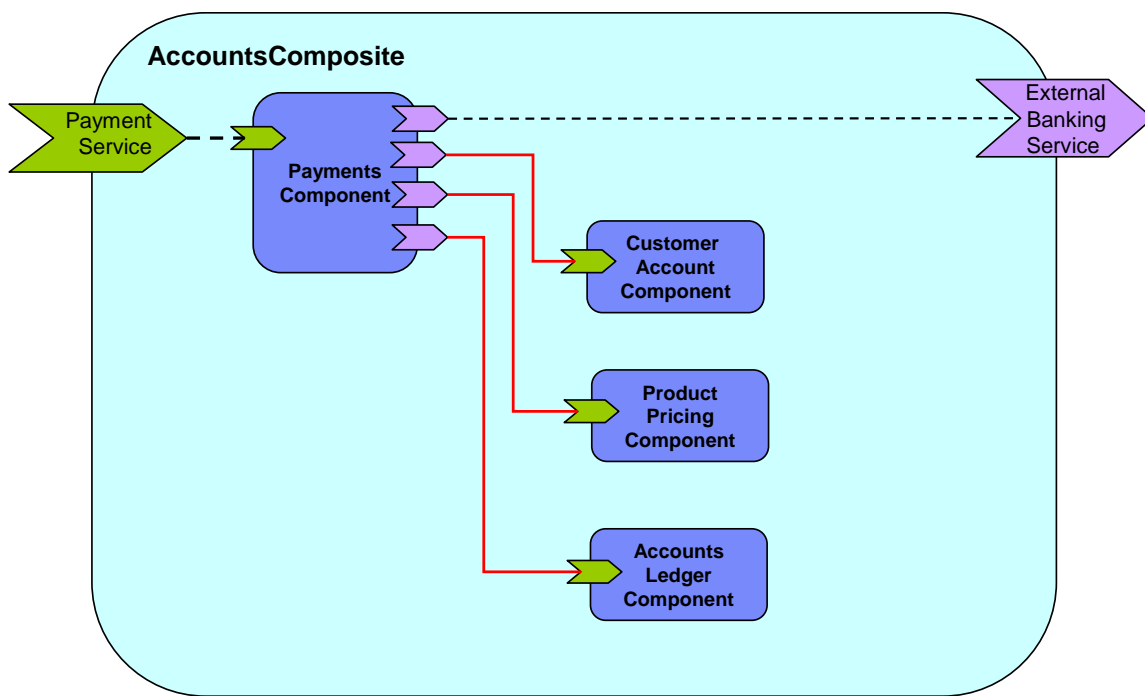


Figure 55-6: Example Composite for Autowire

First,

Snippet 5-15 Snippet 5-15 is the composite using explicit wires:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Autowire Example - No autowire -->
<composite xmlns:xsd="http://www.w3.org/2001/XMLSchema-instance"
  xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912">
```



```

xmlns:foo="http://foo.com"
targetNamespace="http://foo.com"
name="AccountComposite">

<service name="PaymentService" promote="PaymentsComponent"/>

<component name="PaymentsComponent">
  <implementation.java class="com.foo.accounts.Payments"/>
  <service name="PaymentService"/>
  <reference name="CustomerAccountService"
    target="CustomerAccountComponent"/>
  <reference name="ProductPricingService"
    target="ProductPricingComponent"/>
  <reference name="AccountsLedgerService"
    target="AccountsLedgerComponent"/>
  <reference name="ExternalBankingService"/>
</component>

<component name="CustomerAccountComponent">
  <implementation.java class="com.foo.accounts.CustomerAccount"/>
</component>

<component name="ProductPricingComponent">
  <implementation.java class="com.foo.accounts.ProductPricing"/>
</component>

<component name="AccountsLedgerComponent">
  <implementation.composite name="foo:AccountsLedgerComposite"/>
</component>

<reference name="ExternalBankingService"
  promote="PaymentsComponent/ExternalBankingService"/>

</composite>

```

Secondly, Snippet 55-15: Example composite with Explicit wires

Snippet 5-16 Snippet 5-16 is the composite using autowire:

```

<?xml version="1.0" encoding="UTF-8"?>
<!-- Autowire Example - With autowire -->
<composite xmlns:xsd="http://www.w3.org/2001/XMLSchema-instance"
  xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  xmlns:foo="http://foo.com"
  targetNamespace="http://foo.com"
  name="AccountComposite">

  <service name="PaymentService" promote="PaymentsComponent">
    <interface.java class="com.foo.PaymentServiceInterface"/>
  </service>

  <component name="PaymentsComponent" autowire="true">
    <implementation.java class="com.foo.accounts.Payments"/>
    <service name="PaymentService"/>
    <reference name="CustomerAccountService"/>
    <reference name="ProductPricingService"/>
    <reference name="AccountsLedgerService"/>
    <reference name="ExternalBankingService"/>
  </component>

  <component name="CustomerAccountComponent">

```



```

    <implementation.java class="com.foo.accounts.CustomerAccount"/>
  </component>

  <component name="ProductPricingComponent">
    <implementation.java class="com.foo.accounts.ProductPricing"/>
  </component>

  <component name="AccountsLedgerComponent">
    <implementation.composite name="foo:AccountsLedgerComposite"/>
  </component>

  <reference name="ExternalBankingService"
    promote="PaymentsComponent/ExternalBankingService"/>

</composite>

```

Snippet 55-16: composite of Snippet 5-15Snippet 5-15 Using autowire

In this second case, autowire is set on for the PaymentsComponent and there are no explicit wires for any of its references – the wires are created automatically through autowire.

Note: In the second example, it would be possible to omit all of the service and reference elements from the PaymentsComponent. They are left in for clarity, but if they are omitted, the component service and references still exist, since they are provided by the implementation used by the component.

5.5 Using Composites as Component Implementations

Composites can be used as **component implementations** in higher-level composites – in other words the higher-level composites can have components which are implemented by composites.

When a composite is used as a component implementation, it defines a boundary of visibility. Components within the composite cannot be referenced directly by the using component. The using component can only connect wires to the services and references of the used composite and set values for any properties of the composite. The internal construction of the composite is invisible to the using component. The boundary of visibility, sometimes called encapsulation, can be enforced when assembling components and composites, but such encapsulation structures might not be enforceable in a particular implementation language.

A composite used as a component implementation also needs to honor a completeness contract. The services, references and properties of the composite form a contract (represented by the component type of the composite) which is relied upon by the using component. The concept of completeness of the composite implies that, once all <include/> element processing is performed on the composite:

1. For a composite used as a component implementation, each composite service offered by the composite MUST promote a component service of a component that is within the composite. For a composite used as a component implementation, each composite service offered by the composite MUST promote a component service of a component that is within the composite. [ASM60032]
2. For a composite used as a component implementation, every component reference of components within the composite with a multiplicity of 1..1 or 1..n MUST be wired or promoted. For a composite used as a component implementation, every component reference of components within the composite with a multiplicity of 1..1 or 1..n MUST be wired or promoted. [ASM60033]
(according to the various rules for specifying target services for a component reference described in the section " [Specifying the Target Service\(s\) for a Reference](#)").
3. For a composite used as a component implementation, all properties of components within the composite, where the underlying component

implementation specifies "mustSupply=true" for the property, MUST either specify a value for the property or source the value from a composite property. For a composite used as a component implementation, all properties of components within the composite, where the underlying component implementation specifies "mustSupply=true" for the property, MUST either specify a value for the property or source the value from a composite property. [ASM60034]

The component type of a composite is defined by the set of composite service elements, composite reference elements and composite property elements that are the children of the composite element.

Composites are used as component implementations through the use of the **implementation.composite** element as a child element of the component. ~~The Snippet 5-17~~ Snippet 5-17 shows the pseudo-schema snippet for the implementation.composite element is:

```
<!-- implementation.composite pseudo-schema -->
<implementation.composite name="xs:QName" requires="list of xs:QName"?
policySets="list of xs:QName"?>
```

Snippet 55-17: implementation.composite Pseudo-Schema

The **implementation.composite** element has the following attributes:

- **name (1..1)** – the name of the composite used as an implementation. The @name attribute of an <implementation.composite/> element MUST contain the QName of a composite in the SCA Domain. The @name attribute of an <implementation.composite/> element MUST contain the QName of a composite in the SCA Domain. [ASM60030]
- **requires : QNameListOfQNames (0..n1)** – a list of policy intents. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute. Specified intents add to or further qualify the required intents defined for the promoted component reference.
- **policySets : QNameListOfQNames (0..n1)** – a list of policy sets. See the Policy Framework specification [40]SCA-POLICY for a description of this attribute.

5.5.1 Component Type of a Composite used as a Component Implementation

An SCA runtime MUST introspect the componentType of a Composite used as a Component Implementation following the rules defined in the section "Component Type of a Composite used as a Component Implementation" An SCA runtime MUST introspect the componentType of a Composite used as a Component Implementation following the rules defined in the section "Component Type of a Composite used as a Component Implementation" [ASM60045]

The componentType of a Composite used as a Component Implementation is introspected from the Composite document as follows:

A <service/> element exists for each direct <service/> subelement of the <composite/> element

- @name attribute set to the value of the @name attribute of the <service/> in the composite
- @requires attribute set to the value of the @requires attribute of the <service/> in the composite, if present (the value of the @requires attribute contains the intents which apply to the promoted component service, as defined in the Policy Framework specification [SCA POLICY]). If no intents apply to the <service/> in the composite, the @requires attribute is omitted.
- @policySets attribute set to the value of the @policySets attribute of the <service/> in the composite, if it is present. If the @policySets attribute of the <service/> element in the composite is absent, the @policySets attribute is omitted.

- <interface/> subelement set to the <interface/> subelement of the <service/> element in the composite. If not declared on the composite service, it is set to the <interface/> subelement which applies to the component service which is promoted by the composite service (this is either an explicit <interface/> subelement of the component <service/>, or the <interface/> element of the corresponding <service/> in the componentType of the implementation used by the component).
- <binding/> subelements set to the <binding/> subelements of the <service/> element in the composite. If not declared on the composite service, the <binding/> subelements which apply to the component service promoted by the composite service are used, if any are present. If none are present in both of these locations, <binding/> subelements are omitted.
- <callback/> subelement is set to the <callback/> subelement of the <service/> element in the composite. If no <callback/> subelement is present on the composite <service/> element, the <callback/> subelement is omitted.

A <reference/> element exists for each direct <reference/> subelement of the <composite/> element.

- @name attribute set to the value of the @name attribute of the <reference/> in the composite
- @requires attribute set to the value of the @requires attribute of the <reference/> in the composite, if present (the value of the @requires attribute contains the intents which apply to the promoted component references, as defined in the Policy Framework specification [SCA_POLICY]). If no intents apply to the <reference/> in the composite, the @requires attribute is omitted.
- @policySets attribute set to the value of the @policySets attribute of the <reference/> in the composite, if present. If the @policySets attribute of the <reference/> element in the composite is absent, the @policySets attribute is omitted.
- @target attribute is set to the value of the @target attribute of the <reference/> in the composite, if present, otherwise the @target attribute is omitted.
- @wiredByImpl attribute is set to the value of the @wiredByImpl attribute of the <reference/> in the composite, if present. If it is not declared on the composite reference, it is set to the value of the @wiredByImpl attribute of the promoted reference(s).
- @multiplicity attribute is set to the value of the @multiplicity attribute of the <reference/> in the composite
- <interface/> subelement set to the <interface/> subelement of the <reference/> element in the composite. If not declared on the composite reference, it is set to the <interface/> subelement which applies to one of the component reference(s) which are promoted by the composite reference (this is either an explicit <interface/> subelement of the component <reference/>, or the <interface/> element of the corresponding <reference/> in the componentType of the implementation used by the component).
- <binding/> subelements set to the <binding/> subelements of the <reference/> element in the composite. Otherwise, <binding/> subelements are omitted.
- <callback/> subelement is set to the <callback/> subelement of the <reference/> element in the composite. Otherwise, <callback/> subelements are omitted.

A <property/> element exists for each direct <property/> subelement of the <composite/> element.

- @name attribute set to the value of the @name attribute of the <property/> in the composite
- @type attribute set to the value of the @type attribute of the <property/> in the composite, if present
- @element attribute set to the value of the @element attribute of the <property/> in the composite, if present
(Note: either a @type attribute is present or an @element attribute is present - one of them has to be present, but both are not allowed)
- @many attribute set to the value of the @many attribute of the <property/> in the composite, if present, otherwise omitted.

- @mustSupply attribute set to the value of the @mustSupply attribute of the <property/> in the composite, if present, otherwise omitted.
- @requires attribute set to the value of the @requires attribute of the <property/> in the composite, if present, otherwise omitted.
- @policySets attribute set to the value of the @policySets attribute of the <property/> in the composite, if present, otherwise omitted.

A <implementation/> element exists if the <composite/> element has either of the @requires or @policySets attributes declared, with:

- @requires attribute set to the value of the @requires attribute of the composite, if present, otherwise omitted.
- @policySets attribute set to the value of the @policySets attribute of the composite, if present, otherwise omitted.

5.5.15.5.2 Example of Composite used as a Component Implementation

The following is Snippet 5-18. Snippet 5-18 shows an example of a composite which contains two components, each of which is implemented by a composite:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- CompositeComponent example -->
<composite xmlns:xsd="http://www.w3.org/2001/XMLSchema-instance"
  xsd:schemaLocation="http://docs.oasis-open.org/ns/opencsa/sca/200903200912
  file:/C:/Strategy/SCA/v09_osoaschemas/schemas/sca.xsd"
  xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://foo.com"
  xmlns:foo="http://foo.com"
  name="AccountComposite">

  <service name="AccountService" promote="AccountServiceComponent">
    <interface.java interface="services.account.AccountService"/>
    <binding.ws portwsdlElement="AccountService#
      wsdl:endpointport (AccountService/AccountServiceSOAP)"/>
  </service>

  <reference name="stockQuoteService"
    promote="AccountServiceComponent/StockQuoteService">
    <interface.java
      interface="services.stockquote.StockQuoteService"/>
    <binding.ws
      portwsdlElement="http://www.quickstockquote.com/StockQuoteService#
      wsdl:endpointport (StockQuoteService/StockQuoteServiceSOAP)"/>
  </reference>

  <property name="currency" type="xsd:string">EURO</property>

  <component name="AccountServiceComponent">
    <implementation.composite name="foo:AccountServiceCompositel"/>

    <reference name="AccountDataService" target="AccountDataService"/>
    <reference name="StockQuoteService"/>

    <property name="currency" source="$currency"/>
  </component>

  <component name="AccountDataService">
    <implementation.composite name="foo:AccountDataServiceComposite"/>

    <property name="currency" source="$currency"/>
  </component>
</composite>
```

```
2608 </component>
2609
2610 </composite>
```

2611 [Snippet 55-18: Example of a composite Using implementation.composite](#)

2612 5.6 Using Composites through Inclusion

2613 In order to assist team development, composites can be developed in the form of multiple physical
2614 artifacts that are merged into a single logical unit.

2615 A composite can include another composite by using the **include** element. This provides a recursive
2616 inclusion capability. The semantics of included composites are that the element content children of the
2617 included composite are inlined, with certain modification, into the using composite. This is done
2618 recursively till the resulting composite does not contain an **include** element. The outer included
2619 composite element itself is discarded in this process – only its contents are included as described below:

- 2620 1. All the element content children of the included composite are inlined in the
2621 including composite.
- 2622 2. The attributes **@targetNamespace**, **@name**, ~~**@constrainingType**~~, and **@local**
2623 of the included composites are discarded.
- 2624 3. All the namespace declaration on the included composite element are added to
2625 the inlined element content children unless the namespace binding is overridden
2626 by the element content children.
- 2627 4. The attribute **@autowire**, if specified on the included composite, is included on
2628 all inlined component element children unless the component child already
2629 specifies that attribute.
- 2630 5. The attribute values of **@requires** and **@policySet**, if specified on the included
2631 composite, are merged with corresponding attribute on the inlined component,
2632 service and reference children elements. Merge in this context means a set union.
- 2633 6. Extension attributes ,if present on the included composite, follow the rules
2634 defined for that extension. Authors of attribute extensions on the composite
2635 element define the rules applying to those attributes for inclusion.

2636 **If the included composite has the value *true* for the attribute **@local** then the including composite MUST**
2637 **have the same value for the **@local** attribute, else it is an error.If the included composite has the value**
2638 ***true* for the attribute **@local** then the including composite MUST have the same value for the **@local****
2639 **attribute, else it is an error.If the included composite has the value *true* for the attribute **@local** then the**
2640 **including composite MUST have the same value for the **@local** attribute, else it is an error. [ASM60041]**

2641 The composite file used for inclusion can have any contents-. The composite element can contain any of
2642 the elements which are valid as child elements of a composite element, namely components, services,
2643 references, wires and includes. There is no need for the content of an included composite to be complete,
2644 so that artifacts defined within the using composite or in another associated included composite file can
2645 be referenced. For example, it is permissible to have two components in one composite file while a wire
2646 specifying one component as the source and the other as the target can be defined in a second included
2647 composite file.

2648 **The SCA runtime MUST raise an error if the composite resulting from the inclusion of one composite into**
2649 **another is invalid.The SCA runtime MUST raise an error if the composite resulting from the inclusion of**
2650 **one composite into another is invalid. [ASM60031]** For example, it is an error if there are duplicated
2651 elements in the using composite (e.g. two services with the same uri contributed by different included
2652 composites). It is not considered an error if the (using) composite resulting from the inclusion is
2653 incomplete (eg. wires with non-existent source or target). Such incomplete resulting composites are
2654 permitted to allow recursive composition.

2655 **The following**[Snippet 5-19](#)[Snippet 5-19](#) snippet shows the pseudo-schema for the include element:-

2657
2658
2659
2660
2661
2662
2663

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Include snippet -->
<composite ...>
  ...
  <include name="xs:QName"/>*
  ...
</composite>
```

2664 *Snippet 55-19: include Pseudo-Schema*

2665
2666

The **include** element has the **following attribute**:


2667
2668
2669
2670
2671

- **name: QName (1..1)** – the name of the composite that is included. **The @name attribute of an include element MUST be the QName of a composite in the SCA Domain. The @name attribute of an include element MUST be the QName of a composite in the SCA Domain. [ASM60042]**

2672 **5.6.1 Included Composite Examples**

2673
2674
2675
2676
2677
2678
2679
2680
2681
2682

The following figureFigure 5-7Figure 5-7 shows the assembly diagram for the MyValueComposite2 containing four included composites. The **MyValueServices composite** contains the MyValueService service. The **MyValueComponents composite** contains the MyValueServiceComponent and the StockQuoteMediatorComponent as well as the wire between them. The **MyValueReferences composite** contains the CustomerService and StockQuoteService references. The **MyValueWires composite** contains the wires that connect the MyValueService service to the MyValueServiceComponent, that connect the customerService reference of the MyValueServiceComponent to the CustomerService reference, and that connect the stockQuoteService reference of the StockQuoteMediatorComponent to the StockQuoteService reference. Note that this is just one possible way of building the MyValueComposite2 from a set of included composites.

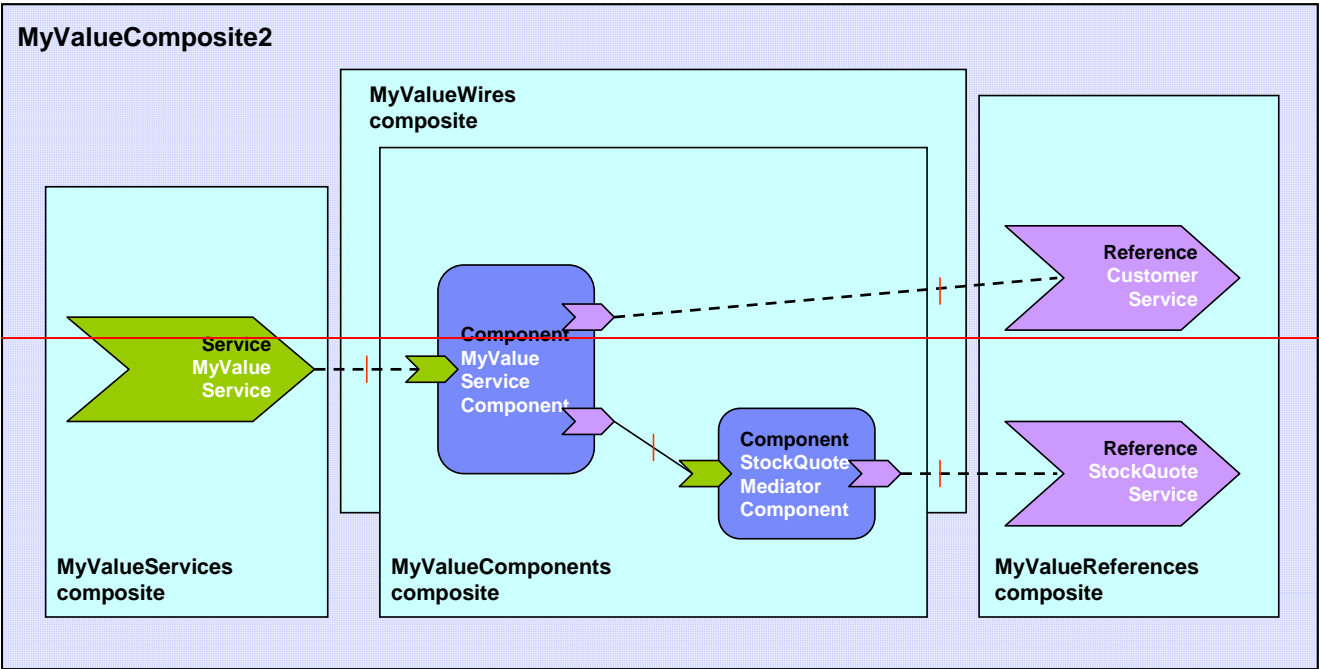

2683

Figure 13

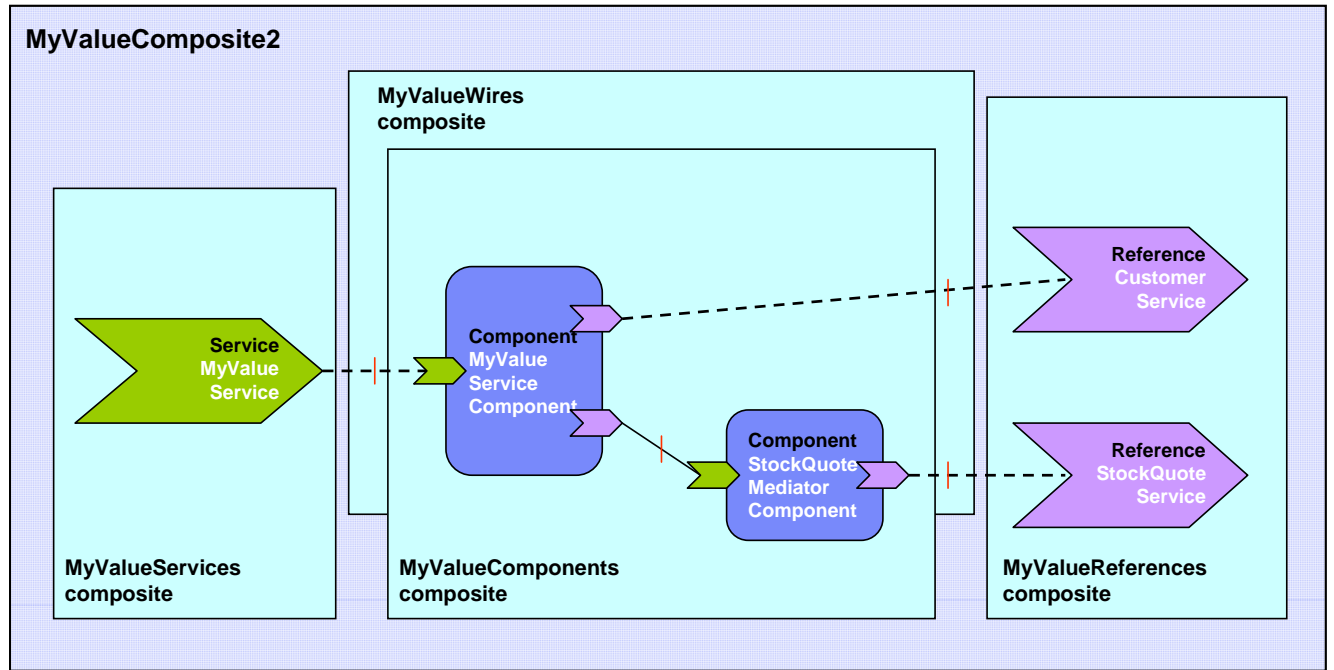


Figure 55-7 MyValueComposite2 built from 4 included composites

The following snippet [Snippet 5-20](#) shows the contents of the MyValueComposite2.composite file for the MyValueComposite2 built using included composites. In this sample it only provides the name of the composite. The composite file itself could be used in a scenario using included composites to define components, services, references and wires.

```
<?xml version="1.0" encoding="ASCII"?>
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://foo.com"
  xmlns:foo="http://foo.com"
  name="MyValueComposite2" >

  <include name="foo:MyValueServices" />
  <include name="foo:MyValueComponents" />
  <include name="foo:MyValueReferences" />
  <include name="foo:MyValueWires" />

</composite>
```

The following snippet [Snippet 55-20: Example composite with includes](#)

[Snippet 5-21](#) shows the content of the MyValueServices.composite file.

```
<?xml version="1.0" encoding="ASCII"?>
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://foo.com"
  xmlns:foo="http://foo.com"
  name="MyValueServices" >
```

```

2717     <service name="MyValueService" promote="MyValueServiceComponent">
2718         <interface.java interface="services.myvalue.MyValueService"/>
2719         <binding.ws portwsdlElement="http://www.myvalue.org/MyValueService#
2720             wsdl.endpointport(MyValueService/MyValueServiceSOAP)"/>
2721     </service>
2722
2723 </composite>
2724
2725

```

The following snippet [Snippet 55-21: Example Partial composite with Only a service](#)

[Snippet 5-22](#) [Snippet 5-22](#) shows the content of the MyValueComponents.composite file.

```

2730 <?xml version="1.0" encoding="ASCII"?>
2731 <composite      xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
2732               targetNamespace="http://foo.com"
2733               xmlns:foo="http://foo.com"
2734               name="MyValueComponents" >
2735
2736     <component name="MyValueServiceComponent">
2737         <implementation.java
2738             class="services.myvalue.MyValueServiceImpl"/>
2739         <property name="currency">EURO</property>
2740     </component>
2741
2742     <component name="StockQuoteMediatorComponent">
2743         <implementation.java class="services.myvalue.SQMediatorImpl"/>
2744         <property name="currency">EURO</property>
2745     </component>
2746
2747 </composite>
2748

```

The following snippet [Snippet 55-22: Example Partial composite with Only components](#)

[Snippet 5-23](#) [Snippet 5-23](#) shows the content of the MyValueReferences.composite file.

```

2753 <?xml version="1.0" encoding="ASCII"?>
2754 <composite      xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
2755               targetNamespace="http://foo.com"
2756               xmlns:foo="http://foo.com"
2757               name="MyValueReferences" >
2758
2759     <reference name="CustomerService"
2760               promote="MyValueServiceComponent/CustomerService">
2761         <interface.java interface="services.customer.CustomerService"/>
2762         <binding.sca/>
2763     </reference>
2764
2765     <reference name="StockQuoteService"
2766               promote="StockQuoteMediatorComponent">
2767         <interface.java
2768             interface="services.stockquote.StockQuoteService"/>
2769         <binding.ws
2770             portwsdlElement="http://www.stockquote.org/StockQuoteService#
2771             wsdl.endpointport(StockQuoteService/StockQuoteServiceSOAP)"/>
2772     </reference>
2773

```



```
</composite>
```

The following snippet [Snippet 55-23: Example Partial composite with Only references](#)

[Snippet 5-24](#) [Snippet 5-24](#) shows the content of the MyValueWires.composite file.

```
<?xml version="1.0" encoding="ASCII"?>
<composite      xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
                targetNamespace="http://foo.com"
                xmlns:foo="http://foo.com"
                name="MyValueWires" >

    <wire source="MyValueServiceComponent/stockQuoteService"
          target="StockQuoteMediatorComponent" />

</composite>
```

[Snippet 55-24: Example Partial composite with Only a wire](#)

5.7 Composites which Contain Component Implementations of Multiple Types

A Composite containing multiple components can have multiple component implementation types. For example, a Composite can contain one component with a Java POJO as its implementation and another component with a BPEL process as its implementation.

5.8 Structural URI of Components

The **structural URI** is a relative URI that describes each use of a given component in the Domain, relative to the URI of the Domain itself. It is never specified explicitly, but it calculated from the configuration of the components configured into the Domain.

A component in a composite can be used more than once in the Domain, if its containing composite is used as the implementation of more than one higher-level component. The structural URI is used to separately identify each use of a component - for example, the structural URI can be used to attach different policies to each separate use of a component.

For components directly deployed into the Domain, the structural URI is simply the name of the component.

Where components are nested within a composite which is used as the implementation of a higher level component, the structural URI consists of the name of the nested component prepended with each of the names of the components upto and including the Domain level component.

For example, consider a component named Component1 at the Domain level, where its implementation is Composite1 which in turn contains a component named Component2, which is implemented by Composite2 which contains a component named Component3. The three components in this example have the following structural URIs:

1. Component1: Component1
2. Component2: Component1/Component2
3. Component3: Component1/Component2/Component3

The structural URI can also be extended to refer to specific parts of a component, such as a service or a reference, by appending an appropriate fragment identifier to the component's structural URI, as follows:

- Service:

2820 | #service(servicename)
2821 |
2822 | • Reference:
2823 |
2824 | #reference(referencename)
2825 |
2826 | • Service binding:
2827 |
2828 | #service-binding(servicename/bindingname)
2829 |
2830 | • Reference binding:
2831 |
2832 | #reference-binding(referencename/bindingname)
2833 | So, for example, the structural URI of the service named "testservice" of component "Component1" is
2834 | Component1#service(testservice).
2835 |

6 ConstrainingType

SCA allows a component, and its associated implementation, to be constrained by a **constrainingType**. The constrainingType element provides assistance in developing top-down usecases in SCA, where an architect or assembler can define the structure of a composite, including the necessary form of component implementations, before any of the implementations are developed.

A constrainingType is expressed as an element which has services, reference and properties as child elements and which can have intents applied to it. The constrainingType is independent of any implementation. Since it is independent of an implementation it cannot contain any implementation-specific configuration information or defaults. Specifically, constrainingType does not contain bindings, policySets, property values or default wiring information. The constrainingType is applied to a component through a @constrainingType attribute on the component.

A constrainingType provides the "shape" for a component and its implementation. Any component configuration that points to a constrainingType is constrained by this shape. The constrainingType specifies the services, references and properties that **MUST** be provided by the implementation of the component to which the constrainingType is attached. [ASM70001] This provides the ability for the implementer to program to a specific set of services, references and properties as defined by the constrainingType. Components are therefore configured instances of implementations and are constrained by an associated constrainingType.

If the configuration of the component or its implementation does not conform to the constrainingType specified on the component element, the SCA runtime **MUST** raise an error. [ASM70002]

A constrainingType is represented by a **constrainingType** element. The following snippet shows the pseudo-schema for the composite element.

```
<?xml version="1.0" encoding="ASCII"?>
<!-- ConstrainingType schema snippet -->
<constrainingType xmlns="http://docs.oasis-open.org/ns/openesa/sea/200903"
  targetNamespace="xs:anyURI"?
  name="xs:NCName">

  <service name="xs:NCName">*
    <interface ... />?
  </service>

  <reference name="xs:NCName"
    multiplicity="0..1 or 1..1 or 0..n or 1..n"?>*
    <interface ... />?
  </reference>

  <property name="xs:NCName" (type="xs:QName" | element="xs:QName")
    many="xs:boolean"? mustSupply="xs:boolean"?/>*

</constrainingType>
```

The constrainingType element has the following **attributes**:

- **name (1..1)** — the name of the constrainingType. The form of a constrainingType name is an XML QName, in the namespace identified by the @targetNamespace attribute. The @name attribute of the constraining type **MUST** be unique in the SCA Domain. [ASM70003]
- **targetNamespace (0..1)** — an identifier for a target namespace into which the constrainingType is declared

ConstrainingType contains **zero or more properties, services, references**.

When an implementation is constrained by a constrainingType its component type MUST contain all the services, references and properties specified in the constrainingType. [ASM70004] The constraining type's references and services will have interfaces specified and can have intents specified. An implementation MAY contain additional services, additional references with @multiplicity=0..1 or @multiplicity=0..n and additional properties with @mustSupply=false beyond those declared in the constraining type, but MUST NOT contain additional references with @multiplicity=1..1 or @multiplicity=1..n or additional properties with @mustSupply=true [ASM70005]

When a component is constrained by a constrainingType via the @constrainingType attribute, the entire componentType associated with the component and its implementation is not visible to the containing composite. The containing composite can only see a projection of the componentType associated with the component and implementation as scoped by the constrainingType of the component. Additional services, references and properties provided by the implementation which are not declared in the constrainingType associated with a component MUST NOT be configured in any way by the containing composite. [ASM70006] This requirement ensures that the constrainingType contract cannot be violated by the composite.

A constrainingType can be applied to an implementation. In this case, the implementation's componentType has a @constrainingType attribute set to the QName of the constrainingType.

6.1 Example constrainingType

The following snippet shows the contents of the component called "MyValueServiceComponent" which is constrained by the constrainingType myns:CT. The componentType associated with the implementation is also shown.

```
<component name="MyValueServiceComponent" constrainingType="myns:CT">
  <implementation.java class="services.myvalue.MyValueServiceImpl"/>
  <property name="currency">EURO</property>
  <reference name="customerService" target="CustomerService">
    <binding.ws ...>
  </reference>
  <reference name="stockQuoteService"
    target="StockQuoteMediatorComponent"/>
</component>

<constrainingType name="CT"
  targetNamespace="http://myns.com">
  <service name="MyValueService">
    <interface.java interface="services.myvalue.MyValueService"/>
  </service>
  <reference name="customerService">
    <interface.java interface="services.customer.CustomerService"/>
  </reference>
  <reference name="stockQuoteService">
    <interface.java interface="services.stockquote.StockQuoteService"/>
  </reference>
  <property name="currency" type="xsd:string"/>
</constrainingType>
```

The component MyValueServiceComponent is constrained by the constrainingType CT which means that it needs to provide:

- **service MyValueService** with the interface services.myvalue.MyValueService
- **reference customerService** with the interface services.stockquote.StockQuoteService

- 2937 ~~•reference **stockQuoteService** with the interface services.stockquote.StockQuoteService~~
- 2938 ~~•property **currency** of type xsd:string.~~

76 Interface

Interfaces define one or more business functions. These business functions are provided by Services and are used by References. A Service offers the business functionality of exactly one interface for use by other components. Each interface defines one or more service **operations** and each operation has zero or one **request (input) message** and zero or one **response (output) message**. The request and response messages can be simple types such as a string value or they can be complex types.

SCA currently supports the following interface type systems:

- Java interfaces
- WSDL 1.1 portTypes ([Web Services Definition Language \[8\]WSDL-11](#))
- C++ classes
- Collections of 'C' functions

SCA is also extensible in terms of interface types. Support for other interface type systems can be added through the extensibility mechanisms of SCA, as described in [the Extension Model section](#).

The following snippet [Snippet 6-1](#) shows the [definition pseudo-schema](#) for the **interface** base element:

```
<interface remotable="boolean"? requires="list of xs:QName"?  
  policySets="list of xs:QName" ?/? ">?  
  <requires/*>  
  <policySetAttachment/*>  
</interface>
```

[Snippet 6-1: interface Pseudo-Schema](#)

The **interface** base element has the following attributes:

- **remotable : boolean (0..1)** – indicates whether an interface is remotable or not (see [Error! Reference source not found: the section on Local and Remotable interfaces](#)). A value of “true” means the interface is remotable, and a value of “false” means it is not. The @remotable attribute has no default value. This attribute is used as an alternative to interface type specific mechanisms such as the @Remotable annotation on a Java interface. The remotable nature of an interface in the absence of this attribute is interface type specific. The rules governing how this attribute relates to interface type specific mechanisms are defined by each interface type. When specified on an interface definition which includes a callback, this attribute also applies to the callback interface (see [Error! Reference source not found: the section on Bidirectional Interfaces](#)).
- **requires : QName list Of QNames (0..n1)** – a list of policy intents. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute
- **policySets : QName list Of QNames (0..n1)** – a list of policy sets. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute.

The **interface** element has the following subelements:

- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the [Policy Framework specification \[SCA-POLICY\]](#) for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the [Policy Framework specification \[SCA-POLICY\]](#) for a description of this element.

For information about Java interfaces, including details of SCA-specific annotations, see the SCA Java Common Annotations and APIs specification [SCA-Common-Java].

2984 | For information about WSDL interfaces, including details of SCA-specific extensions, see SCA-Specific
2985 | Aspects for WSDL Interfaces and WSDL Interface Type.
2986 | For information about C++ interfaces, see the SCA C++ Client and Implementation Model specification
2987 | [SCA-CPP-Client].
2988 | For information about C interfaces, see the SCA C Client and Implementation Model specification [SCA-
2989 | C-Client].

2990 | **7.16.1 Local and Removable Interfaces**

2991 | A removable service is one which can be called by a client which is running in an operating system
2992 | process different from that of the service itself (this also applies to clients running on different machines
2993 | from the service). Whether a service of a component implementation is removable is defined by the
2994 | interface of the service. WSDL defined interfaces are always removable. See the relevant specifications
2995 | for details of interfaces defined using other languages.

2996 | The style of removable interfaces is typically **coarse grained** and intended for **loosely coupled**
2997 | interactions. **Removable service Interfaces MUST NOT make use of method or operation**
2998 | **overloading.** **Removable service Interfaces MUST NOT make use of method or operation**
2999 | **overloading.** **Removable service Interfaces MUST NOT make use of method or operation overloading.**
3000 | [ASM80002] This restriction on operation overloading for removable services aligns with the WSDL 2.0
3001 | specification, which disallows operation overloading, and also with the WS-I Basic Profile 1.1 (section
3002 | 4.5.3 - R2304) which has a constraint which disallows operation overloading when using WSDL 1.1.
3003 | Independent of whether the removable service is called remotely from outside the process where the
3004 | service runs or from another component running in the same process, the data exchange semantics are
3005 | **by-value**.

3006 | Implementations of removable services can modify input messages (parameters) during or after an
3007 | invocation and can modify return messages (results) after the invocation. **If a removable service is called**
3008 | **locally or remotely, the SCA container MUST ensure sure that no modification of input messages by the**
3009 | **service or post-invocation modifications to return messages are seen by the caller.** **If a removable service**
3010 | **is called locally or remotely, the SCA container MUST ensure sure that no modification of input messages**
3011 | **by the service or post invocation modifications to return messages are seen by the caller.** [ASM80003]

3012 | **Here is a snippet which** [Snippet 6-2](#) shows an example of a removable java interface:

```
3013 |  
3014 | package services.hello;  
3015 |  
3016 | @Removable  
3017 | public interface HelloService {  
3018 |  
3019 |     String hello(String message);  
3020 | }
```

3021 | [Snippet 6-2: Example removable interface](#)

3022 |

3023 | It is possible for the implementation of a removable service to indicate that it can be called using by-
3024 | reference data exchange semantics when it is called from a component in the same process. This can be
3025 | used to improve performance for service invocations between components that run in the same process.
3026 | This can be done using the @AllowsPassByReference annotation (see the [Java Client and](#)
3027 | [Implementation Specification](#)).

3028 | A service typed by a local interface can only be called by clients that are running in the same process as
3029 | the component that implements the local service. Local services cannot be published via removable
3030 | services of a containing composite. In the case of Java a local service is defined by a Java interface
3031 | definition without a **@Removable** annotation.

3032 | The style of local interfaces is typically **fine grained** and intended for **tightly coupled** interactions. Local
3033 | service interfaces can make use of **method or operation overloading**.

3034 | The data exchange semantic for calls to services typed by local interfaces is **by-reference**.

6.2 Interface Compatibility

The **compatibility** of two interfaces is defined in this section and these definitions are used throughout this specification. Three forms of compatibility are defined:

- Compatible interfaces
- Compatible subset
- Compatible superset

Note that WSDL 1.1 message parts can point to an XML Schema element declaration or to an XML Schema types. When determining compatibility between two WSDL operations, a message part that points to an XML Schema element declaration is considered to be incompatible with a message part that points to an XML Schema type.

6.2.1 Compatible Interfaces

An interface A is **Compatible** with a second interface B if and only if all of points 1 through 7 in the following list apply:

1. interfaces A and B are either both remotable or else both local
2. the set of operations in interface A is the same as the set of operations in interface B
3. compatibility for individual operations of the interfaces A and B is defined as compatibility of the signature, i.e., the operation name, the input types, and the output types are the same
4. the order of the input and output types for each operation in interface A is the same as the order of the input and output types for the corresponding operation in interface B
5. the set of Faults and Exceptions expected by each operation in interface A is the same as the set of Faults and Exceptions specified by the corresponding operation in interface B
6. for checking the compatibility of 2 remotable interfaces which are in different interface languages, both are mapped to WSDL 1.1 (if not already WSDL 1.1) and compatibility checking is done between the WSDL 1.1 mapped interfaces.

For checking the compatibility of 2 local interfaces which are in different interface languages, the method of checking compatibility is defined by the specifications which define those interface types, which must define mapping rules for the 2 interface types concerned.
7. if either interface A or interface B declares a callback interface then both interface A and interface B declare callback interfaces and the callback interface declared on interface A is compatible with the callback interface declared on interface B, according to points 1 through 6 above

6.2.2 Compatible Subset

An interface A is a **Compatible Subset** of a second interface B if and only if all of points 1 through 7 in the following list apply:

1. interfaces A and B are either both remotable or else both local
2. the set of operations in interface A is the same as or is a subset of the set of operations in interface B

3. compatibility for individual operations of the interfaces A and B is defined as compatibility of the signature, i.e., the operation name, the input types, and the output types are the same
4. the order of the input and output types for each operation in interface A is the same as the order of the input and output types for the corresponding operation in interface B
5. the set of Faults and Exceptions expected by each operation in interface A is the same as or is a superset of the set of Faults and Exceptions specified by the corresponding operation in interface B
6. for checking the compatibility of 2 remotable interfaces which are in different interface languages, both are mapped to WSDL 1.1 (if not already WSDL 1.1) and compatibility checking is done between the WSDL 1.1 mapped interfaces.
For checking the compatibility of 2 local interfaces which are in different interface languages, the method of checking compatibility is defined by the specifications which define those interface types, which must define mapping rules for the 2 interface types concerned.
7. if either interface A or interface B declares a callback interface then both interface A and interface B declare callback interfaces and the callback interface declared on interface B is a compatible subset of the callback interface declared on interface A, according to points 1 through 6 above

6.2.3 Compatible Superset

An interface A is a **Compatible Superset** of a second interface B if and only if all of points 1 through 7 in the following list apply:

1. interfaces A and B are either both remotable or else both local
2. the set of operations in interface A is the same as or is a superset of the set of operations in interface B
3. compatibility for individual operations of the interfaces A and B is defined as compatibility of the signature, i.e., the operation name, the input types, and the output types are the same
4. the order of the input and output types for each operation in interface B is the same as the order of the input and output types for the corresponding operation in interface A
5. the set of Faults and Exceptions expected by each operation in interface A is the same as or is a subset of the set of Faults and Exceptions specified by the corresponding operation in interface B
6. for checking the compatibility of 2 remotable interfaces which are in different interface languages, both are mapped to WSDL 1.1 (if not already WSDL 1.1) and compatibility checking is done between the WSDL 1.1 mapped interfaces.
For checking the compatibility of 2 local interfaces which are in different interface languages, the method of checking compatibility is defined by the specifications which define those interface types, which must define mapping rules for the 2 interface types concerned.
7. if either interface A or interface B declares a callback interface then both interface A and interface B declare callback interfaces and the callback interface declared

on interface B is a compatible superset of the callback interface declared on interface A, according to points 1 through 6 above

7.26.3 Bidirectional Interfaces

The relationship of a business service to another business service is often peer-to-peer, requiring a two-way dependency at the service level. In other words, a business service represents both a consumer of a service provided by a partner business service and a provider of a service to the partner business service. This is especially the case when the interactions are based on asynchronous messaging rather than on remote procedure calls. The notion of **bidirectional interfaces** is used in SCA to directly model peer-to-peer bidirectional business service relationships.

An interface element for a particular interface type system needs to allow the specification of a callback interface. If a callback interface is specified, SCA refers to the interface as a whole as a bidirectional interface.

The following snippet [Snippet 6-3](#) shows the interface element defined using Java interfaces with a @callbackInterface attribute.

```
<interface.java interface="services.invoicing.ComputePrice"
callbackInterface="services.invoicing.InvoiceCallback"/>
```

[Snippet 6-3: Example interface with a callback](#)

If a service is defined using a bidirectional interface element then its implementation implements the interface, and its implementation uses the callback interface to converse with the client that called the service interface.

If a reference is defined using a bidirectional interface element, the client component implementation using the reference calls the referenced service using the interface. The client MUST provide an implementation of the callback interface. If a reference is defined using a bidirectional interface element, the client component implementation using the reference calls the referenced service using the interface. The client MUST provide an implementation of the callback interface. [ASM80004]

Callbacks can be used for both remotable and local services. Either both interfaces of a bidirectional service MUST be remotable, or both MUST be local. A bidirectional service MUST NOT mix local and remote services. Either both interfaces of a bidirectional service MUST be remotable, or both MUST be local. A bidirectional service MUST NOT mix local and remote services. [ASM80005]

Note that an interface document such as a WSDL file or a Java interface can contain annotations that declare a callback interface for a particular interface (see the section on WSDL Interface type and the Java Common Annotations and APIs specification [SCA-Common-Java]). Whenever an interface document declaring a callback interface is used in the declaration of an <interface/> element in SCA, it MUST be treated as being bidirectional with the declared callback interface. Whenever an interface document declaring a callback interface is used in the declaration of an <interface/> element in SCA, it MUST be treated as being bidirectional with the declared callback interface. [ASM80010] In such cases, there is no requirement for the <interface/> element to declare the callback interface explicitly.

If an <interface/> element references an interface document which declares a callback interface and also itself contains a declaration of a callback interface, the two callback interfaces MUST be compatible. If an <interface/> element references an interface document which declares a callback interface and also itself contains a declaration of a callback interface, the two callback interfaces MUST be compatible. [ASM80011]

Where a component uses an implementation and the component configuration explicitly declares an interface for a service or a reference, if the matching service or reference declaration in the component type declares an interface which has a callback interface, then the component interface declaration MUST also declare a compatible interface with a compatible callback interface. [ASM80012] [ASM80011]

See the section on Interface Compatibility for a definition of "compatible interfaces".

If the service or reference declaration in the component type declares an interface without a callback interface, then the component configuration for the corresponding service or reference MUST NOT declare an interface with a callback interface. In a bidirectional interface, the service interface can have more than one operation defined, and the callback interface can also have more than one operation defined. SCA runtimes MUST allow an invocation of any operation on the service interface to be followed by zero, one or many invocations of any of the operations on the callback interface. In a bidirectional interface, the service interface can have more than one operation defined, and the callback interface can also have more than one operation defined. SCA runtimes MUST allow an invocation of any operation on the service interface to be followed by zero, one or many invocations of any of the operations on the callback interface. [ASM80013]

Where a composite declares an interface for a composite service or a composite reference, if the promoted service or promoted reference has an interface which has a callback interface, then the interface declaration for the composite service or the composite reference MUST also declare a compatible interface with a compatible callback interface. [ASM80014] If the promoted service or promoted reference has an interface without a callback interface, then the interface declaration for the composite service or composite reference MUST NOT declare a callback interface. [ASM80015]

See Section 6.4 Wires for a definition of "compatible interfaces".

In a bidirectional interface, the service interface can have more than one operation defined, and the callback interface can also have more than one operation defined. SCA runtimes MUST allow an invocation of any operation on the service interface to be followed by zero, one or many invocations of any of the operations on the callback interface. [ASM80009] These callback operations can be invoked either before or after the operation on the service interface has returned a response message, if there is one.

For a given invocation of a service operation, which operations are invoked on the callback interface, when these are invoked, the number of operations invoked, and their sequence are not described by SCA. It is possible that this metadata about the bidirectional interface can be supplied through mechanisms outside SCA. For example, it might be provided as a written description attached to the callback interface.

7.36.4 Long-running Request-Response Operations

7.3.16.4.1 Background

A service offering one or more operations which map to a WSDL request-response pattern might be implemented in a long-running, potentially interruptible, way. Consider a BPEL process with receive and reply activities referencing the WSDL request-response operation. Between the two activities, the business process logic could be a long-running sequence of steps, including activities causing the process to be interrupted. Typical examples are steps where the process waits for another message to arrive or a specified time interval to expire, or the process performs asynchronous interactions such as service invocations bound to asynchronous protocols or user interactions. This is a common situation in business processes, and it causes the implementation of the WSDL request-response operation to run for a very long time, e.g., several months (!). In this case, it is not meaningful for any caller to remain in a synchronous wait for the response while blocking system resources or holding database locks.

Note that it is possible to model long-running interactions as a pair of two independent operations as described in the section on bidirectional interfaces. However, it is a common practice (and in fact much more convenient) to model a request-response operation and let the infrastructure deal with the asynchronous message delivery and correlation aspects instead of putting this burden on the application developer.

7.3.26.4.2 Definition of "long-running"

A request-response operation is considered long-running if the implementation does not guarantee the delivery of the response within any specified time interval. Clients invoking such request-response

3223 operations are strongly discouraged from making assumptions about when the response can be
3224 expected.

3225 **7.3.36.4.3 The asyncInvocation Intent**

3226 This specification permits a long-running request-response operation or a complete interface containing
3227 such operations to be marked using a policy intent with the name **asyncInvocation**. It is also possible for
3228 a service to set the asyncInvocation. intent when using an interface which is not marked with the
3229 asyncInvocation. intent. This can be useful when reusing an existing interface definition that does not
3230 contain SCA information.

3231 **7.3.46.4.4 Requirements on Bindings**

3232 In order to support a service operation which is marked with the asyncInvocation intent, it is necessary for
3233 the binding (and its associated policies) to support separate handling of the request message and the
3234 response message. Bindings which only support a synchronous style of message handling, such as a
3235 conventional HTTP binding, cannot be used to support long-running operations.

3236 The requirements on a binding to support the asyncInvocation intent are the same as those to support
3237 services with bidirectional interfaces - namely that the binding needs to be able to treat the transmission
3238 of the request message separately from the transmission of the response message, with an arbitrarily
3239 large time interval between the two transmissions.

3240 An example of a binding/policy combination that supports long-running request-response operations is a
3241 Web service binding used in conjunction with the WS-Addressing "wsam:NonAnonymousResponses"
3242 assertion.

3243 **7.3.56.4.5 Implementation Type Support**

3244 SCA implementation types can provide special asynchronous client-side and asynchronous server-side
3245 mappings to assist in the development of services and clients for long-running request-response
3246 operations.

3247 **7.46.5 SCA-Specific Aspects for WSDL Interfaces**

3248 There are a number of aspects that SCA applies to interfaces in general, such as marking them as having
3249 a callback interface. These aspects apply to the interfaces themselves, rather than their use in a specific
3250 place within SCA. There is thus a need to provide appropriate ways of marking the interface definitions
3251 themselves, which go beyond the basic facilities provided by the interface definition language.

3252 For WSDL interfaces, there is an extension mechanism that permits additional information to be included
3253 within the WSDL document. SCA takes advantage of this extension mechanism. In order to use the SCA
3254 extension mechanism, the SCA namespace (<http://docs.oasis-open.org/ns/opencsa/sca/200903200912>)
3255 needs to be declared within the WSDL document.

3256 First, SCA defines a global attribute element in the SCA namespace which provides a mechanism to
3257 attach policy intents - **@requires**. The Snippet 6-4 shows the definition of this attribute is as follows the
3258 requires element:

3259 ———<attribute

```
3260     <element name="requires">
3261       <complexType>
3262         <sequence minOccurs="0" maxOccurs="unbounded">
3263           <any namespace="##other" processContents="lax"/>
3264         </sequence>
3265         <attribute name="intents" type="sca:listOfQNames" use="required"/>
3266         <anyAttribute namespace="##other" processContents="lax"/>
3267       </complexType>
3268     </element>
3269
3270     <simpleType name="listOfQNames">
```

```
3271 _____ <list itemType="QName" />
3272 _____ </simpleType>
```

3273 *The @Snippet 6-4: requires attribute WSDL extension definition*

3274
3275 The requires element can be applied to WSDL Port Type elements (used as a subelement of the WSDL
3276 1.1). The requires element contains one or more intent names, as
3277 defined by the Policy Framework specification [40]SCA-POLICY. Any service or reference that uses an
3278 interface marked with intents MUST implicitly add those intents to its own @requires list. Any service or
3279 reference that uses an interface marked with intents MUST implicitly add those intents to its own
3280 @requires list. [ASM80008]

3281 SCA defines an attribute which is used to indicate that a given WSDL Port Type element (WSDL 1.1)
3282 has an associated callback interface. This is the @callback attribute, which applies to a WSDL
3283 <portType> element.

3284
3285 The Snippet 6-5 shows the definition of the @callback attribute. The @callback attribute is defined as a global attribute in the SCA
3286 namespace, as follows:

```
3287  
3288 <attribute name="callback" type="QName" />
```

3291 *Snippet 6-5: callback WSDL extension definition*

3292
3293 The value of the @callback attribute is the QName of a Port Type. The Port Type declared
3294 by the @callback attribute is the callback interface to use for the portType which is annotated by the
3295 @callback attribute.

3296
3297 Here Snippet 6-6 is an example of a portType element with a @callback attribute:

```
3298  
3299 <portType name="LoanService" sca:callback="foo:LoanServiceCallback">  
3300 <operation name="apply">  
3301 <input message="tns:ApplicationInput" />  
3302 <output message="tns:ApplicationOutput" />  
3303 </operation>  
3304 ...  
3305 </portType>
```

3306 *Snippet 6-6: Example use of @callback*

3307 7.56.6 WSDL Interface Type

3308 The WSDL interface type is used to declare interfaces for services and for references, where the interface
3309 is defined in terms of a WSDL document. An interface is defined in terms of a WSDL 1.1 Port Type
3310 with the arguments and return of the service operations described using XML schema.

3311
3312
3313 A WSDL interface is declared by an **interface.wsdl** element. The following Snippet 6-7 shows the
3314 pseudo-schema for the interface.wsdl element:

```
3315  
3316 <!-- WSDL Interface schema snippet -->  
3317  
3318 <interface.wsdl interface="xs:anyURI" callbackInterface="xs:anyURI"?>
```



```

remotable="xs:boolean"? >
requires="listOfQNames"?
policySets="listOfQNames">
<requires/>*
<policySetAttachment/>*
</interface.wsdl>

```

Snippet 6-7: interface.wsdl Pseudo-Schema

The **interface.wsdl** element has the following attributes:

- **interface : uri (1..1)** - the URI of a WSDL **Port** portType

The interface.wsdl @interface attribute MUST reference a portType of a WSDL 1.1 document. The interface.wsdl @interface attribute MUST reference a portType of a WSDL 1.1 document. The interface.wsdl @interface attribute MUST reference a portType of a WSDL 1.1 document. [ASM80001]
- **callbackInterface : uri (0..1)** - a callback interface, which is the URI of a WSDL **Port** portType

The interface.wsdl @callbackInterface attribute, if present, MUST reference a portType of a WSDL 1.1 document. The interface.wsdl @callbackInterface attribute, if present, MUST reference a portType of a WSDL 1.1 document. [ASM80016]
- **remotable : boolean (0..1)** – indicates whether the interface is remotable or not. @remotable has a default value of true. WSDL interfaces are always remotable and therefore an <interface.wsdl/> element MUST NOT contain remotable="false". WSDL interfaces are always remotable and therefore an <interface.wsdl/> element MUST NOT contain remotable="false". [ASM80017]
- **requires : listOfQNames (0..1)** – a list of policy intents. See the Policy Framework specification [SCA-POLICY] for a description of this attribute.
- **policySets : listOfQNames (0..1)** – a list of policy sets. See the Policy Framework specification [SCA-POLICY] for a description of this attribute.

The form of the URI for WSDL **port types** portTypes follows the syntax described in the WSDL 1.1 Element Identifiers specification [WSDL11_Identifiers]

The **interface.wsdl** element has the following subelements:

- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

7.5.16.6.1 Example of interface.wsdl

```

<interface.wsdl interface="http://www.stockquote.org/StockQuoteService#
wsdl.porttype(StockQuote)"
callbackInterface="http://www.stockquote.org/StockQuoteService#
wsdl.porttype(StockQuoteCallback)"/>

```

This declares an interface in terms of the WSDL port type "StockQuote" with a callback interface defined by the "StockQuoteCallback" port type.

Snippet 6-8 shows an interface defined by the WSDL portType "StockQuote" with a callback interface defined by the "StockQuoteCallback" portType.


```
3366 <interface.wsd interface="http://www.stockquote.org/StockQuoteService#  
3367 wsdl.porttype(StockQuote)"  
3368 callbackInterface="http://www.stockquote.org/StockQuoteService#  
3369 wsdl.porttype(StockQuoteCallback)"/>
```

3370 *Snippet 6-8: Example interface.wsd!*

87 Binding

Bindings are used by services and references. References use bindings to describe the access mechanism used to call a service (which can be a service provided by another SCA composite). Services use bindings to describe the access mechanism that clients (which can be a client from another SCA composite) have to use to call the service.

SCA supports the use of multiple different types of bindings. Examples include **SCA service**, **Web service**, **stateless session EJB**, **database stored procedure**, **EIS service**. SCA provides an extensibility mechanism by which an SCA runtime can add support for additional binding types. For details on how additional binding types are defined, see the section on the Extension Model.

A binding is defined by a **binding element** which is a child element of a service or of a reference element in a composite. ~~The following snippet~~ [Snippet 7-1](#) shows the composite [pseudo](#)-schema with the [pseudo](#)-schema for the binding element.

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Bindings schema snippet -->
<composite ... >
  ...
  <service ... >*
    <interface ... />?
    <binding uri="xs:anyURI"? name="xs:NCName"?
      requires="list of xs:QName"?
      policySets="list of xs:QName"?>*
      <wireFormat/>?
      <operationSelector/>?
      <requires/>*
      <policySetAttachment/>*
    </binding>
    <callback>?
      <binding uri="xs:anyURI"? name="xs:NCName"?
        requires="list of xs:QName"?
        policySets="list of xs:QName"?>+
        <wireFormat/>?
        <operationSelector/>?
        <requires/>*
        <policySetAttachment/>*
      </binding>
    </callback>
  </service>
  ...
  <reference ... >*
    <interface ... />?
    <binding uri="xs:anyURI"? name="xs:NCName"?
      requires="list of xs:QName"?
      policySets="list of xs:QName"?>*
      <wireFormat/>?
      <operationSelector/>?
      <requires/>*
      <policySetAttachment/>*
    </binding>
    <callback>?
      <binding uri="xs:anyURI"? name="xs:NCName"?
        requires="list of xs:QName"?
        policySets="list of xs:QName"?>+
        <wireFormat/>?
        <operationSelector/>?
        <requires/>*
        <policySetAttachment/>*
      </binding>
    </callback>
  </reference>
</composite>
```

```

3428     </callback>
3429     </reference>
3430     ...
3431 </composite>

```

Snippet 7-1: composite Pseudo-Schema with binding Child element

The element name of the binding element is architected; it is in itself a qualified name. The first qualifier is always named "binding", and the second qualifier names the respective binding-type (e.g. binding.sca, binding.ws, binding.ejb, binding.eis).

A **binding** element has the **following** attributes:

- **uri (0..1)** - has the **following** semantic:
 - ⊖ The @uri attribute can be omitted.
 - ⊖ For a binding of a **reference** the @uri attribute defines the target URI of the reference. This MUST be either the componentName/serviceName/bindingName for a wire to an endpoint within the SCA Domain, or the accessible address of some service endpoint either inside or outside the SCA Domain (where the addressing scheme is defined by the type of the binding). For a binding of a **reference** the @uri attribute defines the target URI of the reference. This MUST be either the componentName/serviceName/bindingName for a wire to an endpoint within the SCA Domain, or the accessible address of some service endpoint either inside or outside the SCA Domain (where the addressing scheme is defined by the type of the binding). For a binding of a **reference** the @uri attribute defines the target URI of the reference. This MUST be either the componentName/serviceName for a wire to an endpoint within the SCA Domain, or the accessible address of some service endpoint either inside or outside the SCA Domain (where the addressing scheme is defined by the type of the binding). [ASM90001]
 - ⊖ The circumstances under which the @uri attribute can be used are defined in section "Specifying the Target Service(s) for a Reference."
 - ⊖ For a binding of a **service** the @uri attribute defines the bindingURI. If present, the bindingURI can be used by the binding as described in the section "Form of the URI of a Deployed Binding".
- **name (0..1)** – a name for the binding instance (an NCName). The @name attribute allows distinction between multiple binding elements on a single service or reference. The default value of the @name attribute is the service or reference name. When a service or reference has multiple bindings, only one binding can have the default @name value; all others non-callback bindings of the service or reference MUST have a @name value specified that is unique within names, and all callback bindings of the service or reference MUST have unique names. When a service or reference has multiple bindings, all non-callback bindings of the service or reference MUST have unique names, and all callback bindings of the service or reference MUST have unique names. [ASM90002] This uniqueness requirement implies that only one non-callback binding of a service or reference can have the default @name value, and only one callback binding of a service or reference can have the default @name value.

The @name also permits the binding instance to be referenced from elsewhere – particularly useful for some types of binding, which can be declared in a definitions document as a template and referenced from other binding instances, simplifying the definition of more complex binding instances (see the [JMS Binding specification \[44\]SCA-JMSBINDING](#) for examples of this referencing).

- **requires (0..1)** - a list of policy intents. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute.
- **policySets (0..1)** – a list of policy sets. See the [Policy Framework specification \[40\]SCA-POLICY](#) for a description of this attribute.

A **binding** element has the **following** child elements:

3478 • **wireFormat (0..1)** - a wireFormat to apply to the data flowing using the binding. See [the wireFormat](#)
3479 [section](#) for details.

3480 • **operationSelector(0..1)** - an operationSelector element that is used to match a particular message to
3481 a particular operation in the interface. See [the operationSelector section](#) for details

3482 • **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the
3483 [Policy Framework specification \[SCA-POLICY\]](#) for a description of this element.

3484 • **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more**
3485 **policySetAttachment subelements**. See the [Policy Framework specification \[SCA-POLICY\]](#) for a
3486 [description of this element](#).

3487 When multiple bindings exist for a service, it means that the service is available through any of the
3488 specified bindings. The technique that the SCA runtime uses to choose among available bindings is left
3489 to the implementation and it might include additional (nonstandard) configuration. Whatever technique is
3490 used needs to be documented by the runtime.

3491 Services and References can always have their bindings overridden at the SCA Domain level, unless
3492 restricted by Intents applied to them.

3493 **If a reference has any bindings, they MUST be resolved, which means that each binding MUST include a**
3494 **value for the @uri attribute or MUST otherwise specify an endpoint. The reference MUST NOT be wired**
3495 **using other SCA mechanisms.**~~If a reference has any bindings, they MUST be resolved, which means that~~
3496 ~~each binding MUST include a value for the @uri attribute or MUST otherwise specify an endpoint. The~~
3497 ~~reference MUST NOT be wired using other SCA mechanisms.~~ [ASM90003] To specify constraints on the
3498 kinds of bindings that are acceptable for use with a reference, the user specifies either policy intents or
3499 policy sets.

3500
3501 Users can also specifically wire, not just to a component service, but to a specific binding offered by that
3502 target service. ~~To do so, a~~ **To wire to a specific binding of a target MAY be specified with a service the**
3503 **syntax of "componentName/serviceName/bindingName" MUST be used.**~~To wire to a specific binding of~~
3504 ~~a target service the syntax "componentName/serviceName/bindingName" MUST be used.~~ [ASM90004]

3505

3506 The following sections describe the SCA and Web service binding type in detail.

3507 **8-17.1 Messages containing Data not defined in the Service Interface**

3508 It is possible for a message to include information that is not defined in the interface used to define the
3509 service, for instance information can be contained in SOAP headers or as MIME attachments.

3510 Implementation types can make this information available to component implementations in their
3511 execution context. The specifications for these implementation types describe how this information is
3512 accessed and in what form it is presented.

3513 **8-27.2 WireFormat**

3514 A wireFormat is the form that a data structure takes when it is transmitted using some communication
3515 binding. Another way to describe this is "the form that the data takes on the wire". A wireFormat can be
3516 specific to a given communication method, or it can be general, applying to many different communication
3517 methods. An example of a general wireFormat is XML text format.

3518 Where a particular SCA binding can accommodate transmitting data in more than one format, the
3519 configuration of the binding can include a definition of the wireFormat to use. This is done using an
3520 <sca:wireFormat/> subelement of the <binding/> element.

3521 Where a binding supports more than one wireFormat, the binding defines one of the wireFormats to be
3522 the default wireFormat which applies if no <wireFormat/> subelement is present.

3523 The base sca:wireFormat element is abstract and it has no attributes and no child elements. For a
3524 particular wireFormat, an extension subtype is defined, using substitution groups, for example:

- 3525 • <sca:wireFormat.xml/>
3526 A wireFormat that transmits the data as an XML text datastructure
- 3527 • <sca:wireFormat.jms/>
3528 The "default JMS wireFormat" as described in the JMS Binding specification

3529

3530 Specific wireFormats can have elements that include either attributes or subelements or both.

3531 For details about specific wireFormats, see the related SCA Binding specifications.

3532 **8.37.3 OperationSelector**

3533 An operationSelector is necessary for some types of transport binding where messages are transmitted
3534 across the transport without any explicit relationship between the message and the interface operation to
3535 which it relates. SOAP is an example of a protocol where the messages do contain explicit information
3536 that relates each message to the operation it targets. However, other transport bindings have messages
3537 where this relationship is not expressed in the message or in any related headers (pure JMS messages,
3538 for example). In cases where the messages arrive at a service without any explicit information that maps
3539 them to specific operations, it is necessary for the metadata attached to the service binding to contain the
3540 mapping information. The information is held in an operationSelector element which is a child element of
3541 the binding element.

3542 The base sca:operationSelector element is abstract and it has no attributes and no child elements. For a
3543 particular operationSelector, an extension subtype is defined, using substitution groups, for example:

- 3544 • <sca:operationSelector.XPath/>
3545 An operation selector that uses XPath to filter out specific messages and target them to
3546 particular named operations.

3547

3548 Specific operationSelectors can have elements that include either attributes or subelements or both.

3549 For details about specific operationSelectors, see the related SCA Binding specifications.

3550 **8.47.4 Form of the URI of a Deployed Binding**

3551 SCA Bindings specifications can choose to use the **structural URI** defined in the section "[Structural URI](#)
3552 [of Components](#)" above to derive a binding specific URI according to some Binding-related scheme. The
3553 relevant binding specification describes this.

3554 Alternatively, <binding/> elements have a @uri attribute, which is termed a bindingURI.

3555 If the bindingURI is specified on a given <binding/> element, the binding can use it to derive an endpoint
3556 URI relevant to the binding. The derivation is binding specific and is described by the relevant binding
3557 specification.

3558 For binding.sca, which is described in the SCA Assembly specification, this is as follows:

- 3559 • If the binding @uri attribute is specified on a reference, it identifies the target service in the
3560 SCA Domain by specifying the service's structural URI.
- 3561 • If the binding @uri attribute is specified on a service, it is ignored.

3562 **8.4.17.4.1 Non-hierarchical URIs**

3563 Bindings that use non-hierarchical URI schemes (such as jms: or mailto:) can make use of the @uri
3564 attribute, which is the complete representation of the URI for that service binding. Where the binding
3565 does not use the @uri attribute, the binding needs to offer a different mechanism for specifying the
3566 service address.

8.4.27.4.2 Determining the URI scheme of a deployed binding

One of the things that needs to be determined when building the effective URI of a deployed binding (i.e. endpoint) is the URI scheme. The process of determining the endpoint URI scheme is binding type specific.

If the binding type supports a single protocol then there is only one URI scheme associated with it. In this case, that URI scheme is used.

If the binding type supports multiple protocols, the binding type implementation determines the URI scheme by introspecting the binding configuration, which can include the policy sets associated with the binding.

A good example of a binding type that supports multiple protocols is binding.ws, which can be configured by referencing either an “abstract” WSDL element (i.e. portType or interface) or a “concrete” WSDL element (i.e. binding, or port or endpoint). When the binding references a PortType or Interface, the protocol and therefore the URI scheme is derived from the intents/policy sets attached to the binding. When the binding references a “concrete” WSDL element, there are two cases:

- 1) The referenced WSDL binding element uniquely identifies a URI scheme. This is the most common case. In this case, the URI scheme is given by the protocol/transport specified in the WSDL binding element.
- 2) The referenced WSDL binding element doesn't uniquely identify a URI scheme. For example, when HTTP is specified in the @transport attribute of the SOAP binding element, both “http” and “https” could be used as valid URI schemes. In this case, the URI scheme is determined by looking at the policy sets attached to the binding.

It is worth noting that an intent supported by a binding type can completely change the behavior of the binding. For example, when the intent “confidentiality/transport” is attached to an HTTP binding, SSL is turned on. This basically changes the URI scheme of the binding from “http” to “https”.

8.57.5 SCA Binding

The SCA binding element is defined by the following pseudo-schema.

```
<binding.sca uri=“xs:anyURI”?  
  name=“xs:NCName”?  
  requires=“list of xs:QName”?  
  policySets=“list of xs:QName”?>  
  <wireFormat/>?  
  <operationSelector/>?  
  <requires/>*  
  <policySetAttachment/>*  
</binding.sca>
```

Snippet 7-2: binding.sca pseudo-schema

A **binding.sca** element has the attributes:

- **uri (0..1)** - has the semantic:

- The @uri attribute can be omitted.

- If a <binding.sca/> element of a component reference specifies a URI via its @uri attribute, then this provides a wire to a target service provided by another component. The form of the URI which points to the service of a component that is in the same composite as the source component is as follows:

 <component-name>/<service-name>
or
 <component-name>/<service-name>/<binding-name>

in cases where the service has multiple bindings present.

- The circumstances under which the @uri attribute can be used are defined in the section "Specifying the Target Service(s) for a Reference."
- For a binding.sca of a component service, the @uri attribute MUST NOT be present. For a binding.sca of a component service, the @uri attribute MUST NOT be present. [ASM90005]

- **name (0..1)** – a name for the binding instance (an NCName), as defined for the base <binding/> element type.
- **requires (0..1)** - a list of policy intents. See the Policy Framework specification [SCA-POLICY] for a description of this attribute.
- **policySets (0..1)** – a list of policy sets. See the Policy Framework specification [SCA-POLICY] for a description of this attribute.

A **binding.sca** element has the child elements:

- **wireFormat (0..1)** - a wireFormat to apply to the data flowing using the binding. binding.sca does not define any specific wireFormat elements.
- **operationSelector(0..1)** - an operationSelector element that is used to match a particular message to a particular operation in the interface. binding.sca does not define any specific operationSelector elements.
- **requires : requires (0..n)** - A service element has **zero or more requires subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.
- **policySetAttachment : policySetAttachment (0..n)** - A service element has **zero or more policySetAttachment subelements**. See the Policy Framework specification [SCA-POLICY] for a description of this element.

The SCA binding can be used for service interactions between references and services contained within the SCA Domain. The way in which this binding type is implemented is not defined by the SCA specification and it can be implemented in different ways by different SCA runtimes. The only requirement is that any specified qualities of service are implemented for the SCA binding type. Qualities of service for <binding.sca/> are expressed using intents and/or policy sets following the rules defined in the SCA Policy specification [SCA-POLICY].

The SCA binding type is not intended to be an interoperable binding type. For interoperability, an interoperable binding type such as the Web service binding is used.

An SCA runtime has to support the binding.sca binding type. See the section on SCA Runtime conformance.

A service definition with no binding element specified uses the SCA binding. (see ASM50005 in section 4.2 on Component Service). <binding.sca/> ~~would~~ only ~~have~~ **has** to be specified **explicitly** in override cases, or when ~~you specify~~ a set of bindings **is specified** on a service definition and the SCA binding needs to be one of them.

If a reference does not have a binding **subelement specified**, then the binding used ~~can be any~~ **is one** of the bindings specified by the service provider, as long as the intents attached to the reference and the service are all honoured.

, as described in the section on Component References.

If the interface of the service or reference is local, then the local variant of the SCA binding will be used. If the interface of the service or reference is remotable, then either the local or remote variant of the SCA binding will be used depending on whether source and target are co-located or not.

If a <binding.sca/> element of a <component/> <reference/> specifies a URI via its @uri attribute, then this provides ~~the default~~ wire to a **target** service provided by another ~~Domain-level~~ component.

The **valueform** of the URI ~~has which points to~~ **be the service of a component that is in the same composite as the source component is** as follows:

- <domain-component-name>/<service-name>

8.5.17.5.1 Example SCA Binding

The following snippet [Snippet 7-3](#) shows the MyValueComposite.composite file for the MyValueComposite containing the service element for the MyValueService and a reference element for the StockQuoteService. Both the service and the reference use an SCA binding. The target for the reference is left undefined in this binding and would have to be supplied by the composite in which this composite is used.

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Binding SCA example -->
<composite xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://foo.com"
  name="MyValueComposite" >

  <service name="MyValueService" promote="MyValueComponent">
    <interface.java interface="services.myvalue.MyValueService"/>
    <binding.sca/>
    ...
  </service>

  ...

  <reference name="StockQuoteService"
    promote="MyValueComponent/StockQuoteReference">
    <interface.java interface="services.stockquote.StockQuoteService"/>
    <binding.sca/>
  </reference>

</composite>
```

[Snippet 7-3: Example binding.sca](#)

8.67.6 Web Service Binding

SCA defines a Web services binding. This is described in [a separate specification document \[9\]SCA-WSBINDING](#).

8.77.7 JMS Binding

SCA defines a JMS binding. This is described in [a separate specification document \[44\]SCA-JMSBINDING](#).

98 SCA Definitions

There are a variety of SCA artifacts which are generally useful and which are not specific to a particular composite or a particular component. These shared artifacts include intents, policy sets, bindings, binding type definitions and implementation type definitions.

All of these artifacts within an SCA Domain are defined in SCA contributions in files called META-INF/definitions.xml (relative to the contribution base URI). **An SCA runtime MUST make available to the Domain all the artifacts contained within the definitions.xml files in the Domain. An SCA runtime MUST make available to the Domain all the artifacts contained within the definitions.xml files in the Domain. [ASM10002] An SCA runtime MUST reject a definitions.xml file that does not conform to the sca-definitions.xsd schema. An SCA runtime MUST reject a definitions.xml file that does not conform to the sca-definitions.xsd schema. [ASM10003]**

Although the definitions are specified within a single SCA contribution, the definitions are visible throughout the Domain. Because of this, **all of the QNames for the definitions contained in definitions.xml files MUST be unique within the Domain. all of the QNames for the definitions contained in definitions.xml files MUST be unique within the Domain. [ASM10001]** The definitions.xml file contains a definitions element that conforms to the following pseudo-schema **snippetshown in Snippet 8-1:**

```
<?xml version="1.0" encoding="ASCII"?>
<!-- Composite schema snippet -->
<definitions      xmlns="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
                  targetNamespace="xs:anyURI">

    <sca:intent/>*

    <sca:policySet/>*

    <sca:binding/>*

    <sca:bindingType/>*

    <sca:implementationType/>*

</definitions>
```

Snippet 8-1: definitions Pseudo-Schema

The definitions element has the following attribute:

- **targetNamespace (1..1)** – the namespace into which the child elements of this definitions element are placed (used for artifact resolution)

The definitions element contains child elements – intent, policySet, binding, **bindingType** and implementationType. These elements are described elsewhere in this specification or in **the SCA Policy Framework specification [40]SCA-POLICY**. The use of the elements declared within a definitions element is described in the **SCA Policy Framework specification [40]SCA-POLICY** and in the **JMS Binding specification [11]**.

109 Extension Model

The assembly model can be extended with support for new interface types, implementation types and binding types. The extension model is based on XML schema substitution groups. There are three XML Schema substitution group heads defined in the SCA namespace: **interface**, **implementation** and **binding**, for interface types, implementation types and binding types, respectively.

The SCA Client and Implementation specifications and the SCA Bindings specifications (see [1], [9]SCA-WSBINDING, [11]) use these XML Schema substitution groups to define some basic types of interfaces, implementations and bindings, but additional types can be defined as needed, where support for these extra ones is available from the runtime. The interface type elements, implementation type elements, and binding type elements defined by the SCA specifications are all part of the SCA namespace ("http://docs.oasis-open.org/ns/opencsa/sca/200903200912"), as indicated in their respective schemas. New interface types, implementation types and binding types that are defined using this extensibility model, which are not part of these SCA specifications are defined in namespaces other than the SCA namespace.

The "." notation is used in naming elements defined by the SCA specifications (e.g. <implementation.java ... />, <interface.wsdl ... />, <binding.ws ... />), not as a parallel extensibility approach but as a naming convention that improves usability of the SCA assembly language.

Note: How to contribute SCA model extensions and their runtime function to an SCA runtime will be defined by a future version of the specification.

10.19.1 Defining an Interface Type

The following snippet Snippet 9-1 shows the base definition for the **interface** element and **Interface** type contained in **sca-core.xsd**; see **appendixsca-core.xsd** for the complete schema.

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- (c) Copyright SCA Collaboration 2006 -->
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  elementFormDefault="qualified">

  ...

  <element name="interface" type="sca:Interface" abstract="true"/>

<complexType name="Interface"/>
  <complexType name="Interface" abstract="true">
    <choice minOccurs="0" maxOccurs="unbounded">
      <element ref="sca:requires"/>
      <element ref="sca:policySetAttachment"/>
    </choice>
    <attribute name="remotable" type="boolean" use="optional"/>
    <attribute name="requires" type="sca:listOfQNames" use="optional"/>
    <attribute name="policySets" type="sca:listOfQNames" use="optional"/>
  </complexType>

  ...

</schema>
```

In the following snippet Snippet 9-1: interface and Interface Schema

[Snippet 9-2](#) is an example of how the base definition is extended to support Java interfaces. The snippet shows the definition of the **interface.java** element and the **JavaInterface** type contained in **sca-interface-java.xsd**.

```
<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912">

  <element name="interface.java" type="sca:JavaInterface"
    substitutionGroup="sca:interface"/>
  <complexType name="JavaInterface">
    <complexContent>
      <extension base="sca:Interface">
        <attribute name="interface" type="NCName"
          use="required"/>
      </extension>
    </complexContent>
  </complexType>
</schema>
```

In the following snippet [Snippet 9-2: Extending interface to interface.java](#)

[Snippet 9-3](#) is an example of how the base definition can be extended by other specifications to support a new interface not defined in the SCA specifications. The snippet shows the definition of the **my-interface-extension** element and the **my-interface-extension-type** type.

```
<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://www.example.org/myextension"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  xmlns:tns="http://www.example.org/myextension">

  <element name="my-interface-extension"
    type="tns:my-interface-extension-type"
    substitutionGroup="sca:interface"/>
  <complexType name="my-interface-extension-type">
    <complexContent>
      <extension base="sca:Interface">
        ...
      </extension>
    </complexContent>
  </complexType>
</schema>
```

[Snippet 9-3: Example interface extension](#)

10.29.2 Defining an Implementation Type

The following snippet [Snippet 9-4](#) shows the base definition for the **implementation** element and **Implementation** type contained in **sca-core.xsd**; see [appendix-sca-core.xsd](#) for complete schema.

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- (c) Copyright SCA Collaboration 2006 -->
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912">
```

```

xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
elementFormDefault="qualified">

...

<element name="implementation" type="sca:Implementation"
  abstract="true"/>
<complexType name="Implementation" abstract="true">
  <complexContent>
    <extension base="sca:CommonExtensionBase">
      <choice minOccurs="0" maxOccurs="unbounded">
        <element ref="sca:requires"/>
        <element ref="sca:policySetAttachment"/>
      </choice>
      <attribute name="requires" type="sca:listOfQNames"
        use="optional"/>
      <attribute name="policySets" type="sca:listOfQNames"
        use="optional"/>
    </extension>
  </complexContent>
</complexType>

...

</schema>

```

In the following snippet we show [Snippet 9-4: implementation and Implementation Schema](#)

[Snippet 9-5](#) shows how the base definition is extended to support Java implementation. The snippet shows the definition of the **implementation.java** element and the **JavaImplementation** type contained in **sca-implementation-java.xsd**.

```

<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912">

<element name="implementation.java" type="sca:JavaImplementation"
  substitutionGroup="sca:implementation"/>
<complexType name="JavaImplementation">
  <complexContent>
    <extension base="sca:Implementation">
      <attribute name="class" type="NCName"
        use="required"/>
    </extension>
  </complexContent>
</complexType>
</schema>

```

In the following snippet [Snippet 9-5: Extending implementation to implementation.java](#)

[Snippet 9-6](#) is an example of how the base definition can be extended by other specifications to support a new implementation type not defined in the SCA specifications. The snippet shows the definition of the **my-impl-extension** element and the **my-impl-extension-type** type.

```

<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"

```

```

    targetNamespace="http://www.example.org/myextension"
    xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
    xmlns:tns="http://www.example.org/myextension">

    <element name="my-impl-extension" type="tns:my-impl-extension-type"
      substitutionGroup="sca:implementation"/>
    <complexType name="my-impl-extension-type">
      <complexContent>
        <extension base="sca:Implementation">
          ...
        </extension>
      </complexContent>
    </complexType>
  </schema>

```

[Snippet 9-6: Example implementation extension](#)

In addition to the definition for the new implementation instance element, there needs to be an associated `implementationType` element which provides metadata about the new implementation type. The pseudo schema for the `implementationType` element is shown in [the following snippet Snippet 9-7](#):

```

<implementationType type="xs:QName"
  alwaysProvides="list of intent xs:QName"
  mayProvide="list of intent xs:QName"/>

```

[Snippet 9-7: implementationType Pseudo-Schema](#)

The implementation type has the ~~following~~ attributes:

- **type (1..1)** – the type of the implementation to which this `implementationType` element applies. This is intended to be the QName of the implementation element for the implementation type, such as `"sca:implementation.java"`
- **alwaysProvides (0..1)** – a set of intents which the implementation type always provides. See [the Policy Framework specification \[40\]SCA-POLICY](#) for details.
- **mayProvide (0..1)** – a set of intents which the implementation type provides only when the intent is attached to the implementation element. See [the Policy Framework specification \[40\]SCA-POLICY](#) for details.

10.39.3 Defining a Binding Type

~~The following snippet~~[Snippet 9-8](#) shows the base definition for the **binding** element and **Binding** type contained in **sca-core.xsd**; see [appendix-sca-core.xsd](#) for complete schema.

```

<?xml version="1.0" encoding="UTF-8"?>
<!-- binding type schema snippet -->
<!-- (c) Copyright SCA Collaboration 2006, 2009 -->
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  elementFormDefault="qualified">
  ...

  <element name="binding" type="sca:Binding" abstract="true"/>
  <complexType name="Binding">
    <attribute name="uri" type="anyURI" use="optional"/>

```

```

    <attribute name="name" type="NCName" use="optional"/>
    <attribute name="requires" type="sca:listOfQNames"
      use="optional"/>
    <attribute name="policySets" type="sca:listOfQNames"
      use="optional"/>
  </complexType>
  ...
</schema>

```

~~In the following snippet~~ [Snippet 9-8: binding and Binding Schema](#)

[Snippet 9-9](#) is an example of how the base definition is extended to support Web service binding. The snippet shows the definition of the **binding.ws** element and the **WebServiceBinding** type contained in **sca-binding-webservice.xsd**.

```

<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912">

  <element name="binding.ws" type="sca:WebServiceBinding"
    substitutionGroup="sca:binding"/>
  <complexType name="WebServiceBinding">
    <complexContent>
      <extension base="sca:Binding">
        <attribute name="port" type="anyURI" use="required"/>
      </extension>
    </complexContent>
  </complexType>
</schema>

```

~~In the following snippet~~ [Snippet 9-9: Extending binding to binding.ws](#)

[Snippet 9-10](#) is an example of how the base definition can be extended by other specifications to support a new binding not defined in the SCA specifications. The snippet shows the definition of the **my-binding-extension** element and the **my-binding-extension-type** type.

```

<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://www.example.org/myextension"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  xmlns:tns="http://www.example.org/myextension">

  <element name="my-binding-extension"
    type="tns:my-binding-extension-type"
    substitutionGroup="sca:binding"/>
  <complexType name="my-binding-extension-type">
    <complexContent>
      <extension base="sca:Binding">
        ...
      </extension>
    </complexContent>
  </complexType>
</schema>

```

[Snippet 9-10: Example binding extension](#)

In addition to the definition for the new binding instance element, there needs to be an associated bindingType element which provides metadata about the new binding type. The pseudo schema for the bindingType element is shown in [the following snippet Snippet 9-11](#):

```
<bindingType type="xs:QName"
  alwaysProvides="list of intent QNames"?
  mayProvide = "list of intent QNames"?/>
```

[Snippet 9-11: bindingType Pseudo-Schema](#)

The binding type has the following attributes:

- **type (1..1)** – the type of the binding to which this bindingType element applies. This is intended to be the QName of the binding element for the binding type, such as "sca:binding.ws"
- **alwaysProvides (0..1)** – a set of intents which the binding type always provides. See [the Policy Framework specification \[40\]SCA-POLICY](#) for details.
- **mayProvide (0..1)** – a set of intents which the binding type provides only when the intent is attached to the binding element. See [the Policy Framework specification \[40\]SCA-POLICY](#) for details.

10.49.4 Defining an Import Type

The following snippet [Snippet 9-12](#) shows the base definition for the **import** element and **Import** type contained in **sca-core.xsd**; see [appendix sca-core.xsd](#) for complete schema.

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved. OASIS trademark,
IPR and other policies apply. -->
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  elementFormDefault="qualified">
...
  <!-- Import -->
  <element name="importBase" type="sca:Import" abstract="true" />
  <complexType name="Import" abstract="true">
    <complexContent>
      <extension base="sca:CommonExtensionBase">
        <sequence>
          <any namespace="##other" processContents="lax" minOccurs="0"
            maxOccurs="unbounded" />
        </sequence>
      </extension>
    </complexContent>
  </complexType>

  <element name="import" type="sca:ImportType"
    substitutionGroup="sca:importBase"/>
  <complexType name="ImportType">
    <complexContent>
      <extension base="sca:Import">
        <attribute name="namespace" type="string" use="required"/>
        <attribute name="location" type="anyURI" use="required"/>
      </extension>
    </complexContent>
  </complexType>
```

```

    </complexType>
    ...
</schema>

```

In the following snippet we show [Snippet 9-12: import and Import Schema](#)

[Snippet 9-13 shows](#) how the base import definition is extended to support Java imports. In the import element, the namespace is expected to be an XML namespace, an import.java element uses a Java package name instead. The snippet shows the definition of the **import.java** element and the **JavaImportType** type contained in **sca-import-java.xsd**.

```

<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912">

  <element name="import.java" type="sca:JavaImportType"
    substitutionGroup="sca:importBase"/>
  <complexType name="JavaImportType">
    <complexContent>
      <extension base="sca:Import">
        <attribute name="package" type="xs:String" use="required"/>
        <attribute name="location" type="xs:AnyURI" use="optional"/>
      </extension>
    </complexContent>
  </complexType>
</schema>

```

In the following snippet we show [Snippet 9-13: Extending import to import.java](#)

[Snippet 9-14 shows](#) an example of how the base definition can be extended by other specifications to support a new interface not defined in the SCA specifications. The snippet shows the definition of the **my-import-extension** element and the **my-import-extension-type** type.

```

<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://www.example.org/myextension"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  xmlns:tns="http://www.example.org/myextension">

  <element name="my-import-extension"
    type="tns:my-import-extension-type"
    substitutionGroup="sca:importBase"/>
  <complexType name="my-import-extension-type">
    <complexContent>
      <extension base="sca:Import">
        ...
      </extension>
    </complexContent>
  </complexType>
</schema>

```

[Snippet 9-14: Example import extension](#)

For a complete example using this extension point, see the definition of *import.java* in the SCA Java Common Annotations and APIs Specification [SCA-Java].

10.59.5 Defining an Export Type

The following snippet [Snippet 9-15](#) shows the base definition for the **export** element and **ExportType** type contained in **sca-core.xsd**; see appendix for complete schema.

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved. OASIS trademark,
IPR and other policies apply. -->
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
  elementFormDefault="qualified">

  ...
  <!-- Export -->
  <element name="exportBase" type="sca:Export" abstract="true" />
  <complexType name="Export" abstract="true">
    <complexContent>
      <extension base="sca:CommonExtensionBase">
        <sequence>
          <any namespace="##other" processContents="lax" minOccurs="0"
            maxOccurs="unbounded" />
        </sequence>
      </extension>
    </complexContent>
  </complexType>

  <element name="export" type="sca:ExportType"
    substitutionGroup="sca:exportBase"/>
  <complexType name="ExportType">
    <complexContent>
      <extension base="sca:Export">
        <attribute name="namespace" type="string" use="required"/>
      </extension>
    </complexContent>
  </complexType>

  ...
</schema>
```

The following snippet [Snippet 9-15: export and Export Schema](#)

[Snippet 9-16](#) shows how the base definition is extended to support Java exports. In a base *export* element, the *@namespace* attribute specifies XML namespace being exported. An *export.java* element uses a *@package* attribute to specify the Java package to be exported. The snippet shows the definition of the **export.java** element and the **JavaExportType** type contained in **sca-export-java.xsd**.

```
<?xml version="1.0" encoding="UTF-8"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-
open.org/ns/opencsa/sca/200903200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912">

  <element name="export.java" type="sca:JavaExportType"
    substitutionGroup="sca:exportBase"/>
```

```

4176     <complexType name="JavaExportType">
4177         <complexContent>
4178             <extension base="sca:Export">
4179                 <attribute name="package" type="xs:String" use="required"/>
4180             </extension>
4181         </complexContent>
4182     </complexType>
4183 </schema>

```

~~In the following snippet~~ [Snippet 9-16: Extending export to export.java](#)

[Snippet 9-17](#) we ~~show~~ [shows](#) an example of how the base definition can be extended by other specifications to support a new interface not defined in the SCA specifications. The snippet shows the definition of the **my-export-extension** element and the **my-export-extension-type** type.

```

4191 <?xml version="1.0" encoding="UTF-8"?>
4192 <schema xmlns="http://www.w3.org/2001/XMLSchema"
4193     targetNamespace="http://www.example.org/myextension"
4194     xmlns:sca="http:// docs.oasis-open.org/ns/opencsa/sca/200903"
4195     xmlns:tns="http://www.example.org/myextension">
4196
4197     <element name="my-export-extension"
4198         type="tns:my-export-extension-type"
4199         substitutionGroup="sca:exportBase"/>
4200     <complexType name="my-export-extension-type">
4201         <complexContent>
4202             <extension base="sca:Export">
4203                 ...
4204             </extension>
4205         </complexContent>
4206     </complexType>
4207 </schema>

```

[Snippet 9-17: Example export extension](#)

For a complete example using this extension point, see the definition of **export.java** in the SCA Java Common Annotations and APIs Specification [SCA-Java].

4212 **11.10 Packaging and Deployment**

4213 This section describes the SCA Domain and the packaging and deployment of artifacts contributed to the
4214 Domain.

4215 **11.110.1 Domains**

4216 An **SCA Domain** represents a complete runtime configuration, potentially distributed over a series of
4217 interconnected runtime nodes.

4218 A single SCA Domain defines the boundary of visibility for all SCA mechanisms. For example, SCA wires
4219 can only be used to connect components within a single SCA Domain. Connections to services outside
4220 the Domain use binding specific mechanisms for addressing services (such as WSDL endpoint URIs).
4221 Also, SCA mechanisms such as intents and policySets can only be used in the context of a single
4222 Domain. In general, external clients of a service that is developed and deployed using SCA are not able
4223 to tell that SCA is used to implement the service – it is an implementation detail.

4224 The size and configuration of an SCA Domain is not constrained by the SCA Assembly specification and
4225 is expected to be highly variable. An SCA Domain typically represents an area of business functionality
4226 controlled by a single organization. For example, an SCA Domain might be the whole of a business, or it
4227 might be a department within a business.

4228 As an example, for the accounts department in a business, the SCA Domain might cover all finance-
4229 related functions, and it might contain a series of composites dealing with specific areas of accounting,
4230 with one for Customer accounts and another dealing with Accounts Payable.

4231 An SCA Domain has the following:

- 4232 • A virtual domain-level composite whose components are deployed and running
- 4233 • A set of *installed contributions* that contain implementations, interfaces and other artifacts necessary
4234 to execute components
- 4235 • A set of logical services for manipulating the set of contributions and the virtual domain-level
4236 composite.

4237 The information associated with an SCA Domain can be stored in many ways, including but not limited to
4238 a specific filesystem structure or a repository.

4239 **11.210.2 Contributions**

4240 An SCA Domain might need a large number of different artifacts in order to work. These artifacts include
4241 artifacts defined by SCA and other artifacts such as object code files and interface definition files. The
4242 SCA-defined artifact types are all XML documents. The root elements of the different SCA definition
4243 documents are: composite, componentType, ~~constrainingType~~ and definitions. XML artifacts that are not
4244 defined by SCA but which are needed by an SCA Domain include XML Schema documents, WSDL
4245 documents, and BPEL documents. SCA constructs, like other XML-defined constructs, use XML qualified
4246 names for their identity (i.e. namespace + local name).

4247 Non-XML artifacts are also needed within an SCA Domain. The most obvious examples of such non-
4248 XML artifacts are Java, C++ and other programming language files necessary for component
4249 implementations. Since SCA is extensible, other XML and non-XML artifacts might also be needed.

4250 SCA defines an interoperable packaging format for contributions (ZIP), as specified below. This format is
4251 not the only packaging format that an SCA runtime can use. SCA allows many different packaging
4252 formats, but it is necessary for an SCA runtime to support the ZIP contribution format. When using the
4253 ZIP format for deploying a contribution, this specification does not specify whether that format is retained
4254 after deployment. For example, a Java EE based SCA runtime could convert the ZIP package to an EAR
4255 package. SCA expects certain characteristics of any packaging:

- For any contribution packaging it MUST be possible to present the artifacts of the packaging to SCA as a hierarchy of resources based off of a single root. For any contribution packaging it MUST be possible to present the artifacts of the packaging to SCA as a hierarchy of resources based off of a single root [ASM12001]
- Within any contribution packaging A directory resource SHOULD exist at the root of the hierarchy named META-INF [ASM12002]
- Within any contribution packaging a document SHOULD exist directly under the META-INF directory named sca-contribution.xml which lists the SCA Composites within the contribution that are runnable. [ASM12003]

The same document can also list namespaces of constructs that are defined within the contribution and which are available for use by other contributions, through export elements.

~~Error! Reference source not found.~~

These additional elements might not be physically present in the packaging, but might be generated based on the definitions and references that are present, or they might not exist at all if there are no unresolved references.

See the section "[SCA Contribution Metadata Document](#)" for details of the format of this file.

To illustrate that a variety of packaging formats can be used with SCA, the following are examples of formats that might be used to package SCA artifacts and metadata (as well as other artifacts) as a contribution:

- A filesystem directory
- An OSGi bundle
- A compressed directory (zip, gzip, etc)
- A JAR file (or its variants – WAR, EAR, etc)

Contributions do not contain other contributions. If the packaging format is a JAR file that contains other JAR files (or any similar nesting of other technologies), the internal files are not treated as separate SCA contributions. It is up to the implementation to determine whether the internal JAR file is represented as a single artifact in the contribution hierarchy or whether all of the contents are represented as separate artifacts.

A goal of SCA's approach to deployment is that the contents of a contribution do not need to be modified in order to install and use the contents of the contribution in a Domain.

~~11.2.1~~10.2.1 SCA Artifact Resolution

Contributions can be self-contained, in that all of the artifacts necessary to run the contents of the contribution are found within the contribution itself. However, it can also be the case that the contents of the contribution make one or many references to artifacts that are not contained within the contribution. These references can be to SCA artifacts such as composites or they can be to other artifacts such as WSDL files, XSD files or to code artifacts such as Java class files and BPEL process files. Note: This form of artifact resolution does not apply to imports of composite files, as described in Section 6.6.

A contribution can use some artifact-related or packaging-related means to resolve artifact references. Examples of such mechanisms include:

- @wsdlLocation and @schemaLocation attributes in references to WSDL and XSD schema artifacts respectively
- OSGi bundle mechanisms for resolving Java class and related resource dependencies

Where present, artifact-related or packaging-related artifact resolution mechanisms MUST be used by the SCA runtime to resolve artifact dependencies. Where present, artifact-related or packaging-related artifact

4305 resolution mechanisms MUST be used by the SCA runtime to resolve artifact dependencies. [ASM12005]
4306 The SCA runtime MUST raise an error if an artifact cannot be resolved using these mechanisms, if
4307 present. The SCA runtime MUST raise an error if an artifact cannot be resolved using these mechanisms,
4308 if present. [ASM12021]

4309

4310 SCA also provides an artifact resolution mechanism. The SCA artifact resolution mechanism is can be
4311 used where no other mechanisms are available, for example in cases where the mechanisms used by the
4312 various contributions in the same SCA Domain are different. An example of this is where an OSGi
4313 Bundle is used for one contribution but where a second contribution used by the first one is not
4314 implemented using OSGi - e.g. the second contribution relates to a mainframe COBOL service whose
4315 interfaces are declared using a WSDL which is accessed by the first contribution.

4316 The SCA artifact resolution is likely to be most useful for SCA Domains containing heterogeneous
4317 mixtures of contribution, where artifact-related or packaging-related mechanisms are unlikely to work
4318 across different kinds of contribution.

4319 SCA artifact resolution works on the principle that a contribution which needs to use artifacts defined
4320 elsewhere expresses these dependencies using **import** statements in metadata belonging to the
4321 contribution. A contribution controls which artifacts it makes available to other contributions through
4322 **export** statements in metadata attached to the contribution. SCA artifact resolution is a general
4323 mechanism that can be extended for the handling of specific types of artifact. The general mechanism
4324 that is described in the following paragraphs is mainly intended for the handling of XML artifacts. Other
4325 types of artifacts, for example Java classes, use an extended version of artifact resolution that is
4326 specialized to their nature (eg. instead of "namespaces", Java uses "packages"). Descriptions of these
4327 more specialized forms of artifact resolution are contained in the SCA specifications that deal with those
4328 artifact types.

4329 Import and export statements for XML artifacts work at the level of namespaces - so that an import
4330 statement declares that artifacts from a specified namespace are found in other contributions, while an
4331 export statement makes all the artifacts from a specified namespace available to other contributions.

4332 An import declaration can simply specify the namespace to import. In this case, the locations which are
4333 searched for artifacts in that namespace are the contribution(s) in the Domain which have export
4334 declarations for the same namespace, if any. Alternatively an import declaration can specify a location
4335 from which artifacts for the namespace are obtained, in which case, that specific location is searched.

4336 There can be multiple import declarations for a given namespace. Where multiple import declarations
4337 are made for the same namespace, all the locations specified MUST be searched in lexical order. There
4338 can be multiple import declarations for a given namespace. Where multiple import declarations are
4339 made for the same namespace, all the locations specified MUST be searched in lexical order.
4340 [ASM12022]

4341 For an XML namespace, artifacts can be declared in multiple locations - for example a given namespace
4342 can have a WSDL declared in one contribution and have an XSD defining XML data types in a second
4343 contribution.

4344 If the same artifact is declared in multiple locations, this is not an error. The first location as defined by
4345 lexical order is chosen. If no locations are specified no order exists and the one chosen is implementation
4346 dependent.

4347 When a contribution contains a reference to an artifact from a namespace that is declared in an import
4348 statement of the contribution, if the SCA artifact resolution mechanism is used to resolve the artifact, the
4349 SCA runtime MUST resolve artifacts in the following order:

4350 1. 1. from the locations identified by the import statement(s) for the namespace.
4351 Locations MUST NOT be searched recursively in order to locate artifacts (i.e. only
4352 a one-level search is performed).

4353 —2. from the contents of the contribution itself. When a contribution contains a
4354 reference to an artifact from a namespace that is declared in an import statement
4355 of the contribution, if the SCA artifact resolution mechanism is used to resolve
4356 the artifact, the SCA runtime MUST resolve artifacts in the following order:

1. from the locations identified by the import statement(s) for the namespace. Locations MUST NOT be searched recursively in order to locate artifacts (i.e. only a one-level search is performed).

2. from the contents of the contribution itself. When a contribution contains a reference to an artifact from a namespace that is declared in an import statement of the contribution, if the SCA artifact resolution mechanism is used to resolve the artifact, the SCA runtime MUST resolve artifacts in the following order:

1. from the locations identified by the import statement(s) for the namespace. Locations MUST NOT be searched recursively in order to locate artifacts (i.e. only a one-level search is performed).

2. from the contents of the contribution itself. [ASM12023]

When a contribution uses an artifact contained in another contribution through SCA artifact resolution, if that artifact itself has dependencies on other artifacts, the SCA runtime MUST resolve these dependencies in the context of the contribution containing the artifact, not in the context of the original contribution. Checking for errors in artifacts MUST NOT be done for artifacts in the Installed state (ie where the artifacts are simply part of installed contributions). Checking for errors in artifacts MUST NOT be done for artifacts in the Installed state (ie where the artifacts are simply part of installed contributions). [ASM12031]

For example:

- a first contribution "C1" references an artifact "A1" in the namespace "n1" and imports the "n1" namespace from a second contribution "C2".
- in contribution "C2" the artifact "A1" in the "n1" namespace references an artifact "A2" also in the "n1" namespace, which is resolved through an import of the "n1" namespace in "C2" which specifies the location "C3".

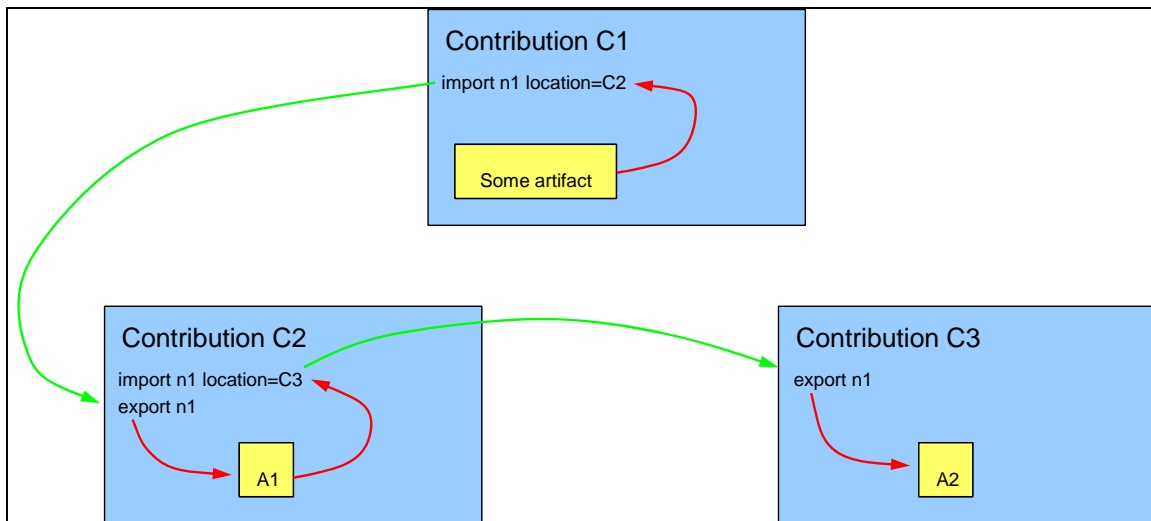


Figure 10-1: Example of SCA Artifact Resolution between Contributions

The "A2" artifact is contained within the third contribution "C3" from which it is resolved by the contribution "C2". The "C3" contribution is never used to resolve artifacts directly for the "C1" contribution, since "C3" is not declared as an import location for "C1".

For example, if for a contribution "C1", an import is used to resolve a composite "X1" contained in contribution "C2", and composite "X1" contains references to other artifacts such as WSDL files or XSDs, those references in "X1" are resolved in the context of contribution "C2" and not in the context of contribution "C1".

The SCA runtime MUST ignore local definitions of an artifact if the artifact is found through resolving an import statement. The SCA runtime MUST ignore local definitions of an artifact if the artifact is found through resolving an import statement. [ASM12024]

The SCA runtime MUST raise an error if an artifact cannot be resolved by using artifact-related or packaging-related artifact resolution mechanisms, if present, by searching locations identified by the import statements of the contribution, if present, and by searching the contents of the contribution. The SCA runtime MUST raise an error if an artifact cannot be resolved by using artifact-related or packaging-related artifact resolution mechanisms, if present, by searching locations identified by the import statements of the contribution, if present, and by searching the contents of the contribution. [ASM12025]

11.2.210.2.2 SCA Contribution Metadata Document

The contribution can contain a document that declares runnable composites, exported definitions and imported definitions. The document is found at the path of META-INF/sca-contribution.xml relative to the root of the contribution. Frequently some SCA metadata needs to be specified by hand while other metadata is generated by tools (such as the <import> elements described below). To accommodate this, it is also possible to have an identically structured document at META-INF/sca-contribution-generated.xml. If this document exists (or is generated on an as-needed basis), it will be merged into the contents of sca-contribution.xml, with the entries in sca-contribution.xml taking priority if there are any conflicting declarations.

An SCA runtime MUST make the <import/> and <export/> elements found in the META-INF/sca-contribution.xml and META-INF/sca-contribution-generated.xml files available for the SCA artifact resolution process. An SCA runtime MUST make the <import/> and <export/> elements found in the META-INF/sca-contribution.xml and META-INF/sca-contribution-generated.xml files available for the SCA artifact resolution process. [ASM12026] An SCA runtime MUST reject files that do not conform to the schema declared in sca-contribution.xsd. An SCA runtime MUST reject files that do not conform to the schema declared in sca-contribution.xsd. [ASM12027] An SCA runtime MUST merge the contents of sca-contribution-generated.xml into the contents of sca-contribution.xml, with the entries in sca-contribution.xml taking priority if there are any conflicting declarations. An SCA runtime MUST merge the contents of sca-contribution-generated.xml into the contents of sca-contribution.xml, with the entries in sca-contribution.xml taking priority if there are any conflicting declarations. [ASM12028]

The format of the document is:

```
<?xml version="1.0" encoding="ASCII"?>
<!-- sca-contribution pseudo-schema -->
<contribution xmlns=http://docs.oasis-open.org/ns/opencsa/sca/200903200912>

  <deployable composite="xs:QName"/>*
  <import namespace="xs:String" location="xs:AnyURI"?/>*
  <export namespace="xs:String"/>*

</contribution>
```

Snippet 10-1: contribution Pseudo-Schema

deployable element: Identifies a composite which is a composite within the contribution that is a composite intended for potential inclusion into the virtual domain-level composite. Other composites in the contribution are not intended for inclusion but only for use by other composites. New composites can be created for a contribution after it is installed, by using the [add Deployment Composite](#) capability and the add To Domain Level Composite capability. An SCA runtime MAY deploy the composites in <deployable/> elements found in the META-INF/sca-contribution.xml and META-INF/sca-contribution-generated.xml files. An SCA runtime MAY deploy the composites in <deployable/> elements found in the META-INF/sca-contribution.xml and META-INF/sca-contribution-generated.xml files. [ASM12029]

Attributes of the deployable element:

- **composite (1..1)** – The QName of a composite within the contribution.

4443

4444 **Export element:** A declaration that artifacts belonging to a particular namespace are exported and are

4445 available for use within other contributions. An export declaration in a contribution specifies a

4446 namespace, all of whose definitions are considered to be exported. By default, definitions are not

4447 exported.

4448 The SCA artifact export is useful for SCA Domains containing heterogeneous mixtures of contribution

4449 packagings and technologies, where artifact-related or packaging-related mechanisms are unlikely to

4450 work across different kinds of contribution.

4451 Attributes of the export element:

4452 • **namespace (1..1)** – For XML definitions, which are identified by QNames, the @namespace attribute

4453 of the export element SHOULD be the namespace URI for the exported definitions. For XML

4454 definitions, which are identified by QNames, the @namespace attribute of the export element

4455 SHOULD be the namespace URI for the exported definitions. [ASM12030] For XML technologies that

4456 define multiple *symbol spaces* that can be used within one namespace (e.g. WSDL ~~port~~

4457 ~~typesportTypes~~ are a different symbol space from WSDL bindings), all definitions from all symbol

4458 spaces are exported.

4459

4460

4461 Technologies that use naming schemes other than QNames use a different export element from

4462 the same substitution group as the the SCA <export> element. The element used identifies the

4463 technology, and can use any value for the namespace that is appropriate for that technology. For

4464 example, <export.java> can be used to export java definitions, in which case the namespace is a fully

4465 qualified package name.

4466

4467 **Import element:** Import declarations specify namespaces of definitions that are needed by the definitions

4468 and implementations within the contribution, but which are not present in the contribution. It is expected

4469 that in most cases import declarations will be generated based on introspection of the contents of the

4470 contribution. In this case, the import declarations would be found in the META-INF/ sca-contribution-

4471 generated.xml document.

4472 Attributes of the import element:

4473 • **namespace (1..1)** – For XML definitions, which are identified by QNames, the namespace is the

4474 namespace URI for the imported definitions. For XML technologies that define multiple *symbol*

4475 *spaces* that can be used within one namespace (e.g. WSDL ~~port~~ ~~typesportTypes~~ are a different

4476 symbol space from WSDL bindings), all definitions from all symbol spaces are imported.

4477

4478

4479 Technologies that use naming schemes other than QNames use a different import element from

4480 the same substitution group as the the SCA <import> element. The element used identifies the

4481 technology, and can use any value for the namespace that is appropriate for that technology. For

4482 example, <import.java> can be used to import java definitions, in which case the namespace is a fully

4483 qualified package name.

4484 • **location (0..1)** – a URI to resolve the definitions for this import. SCA makes no specific

4485 requirements for the form of this URI, nor the means by which it is resolved. It can point to

4486 another contribution (through its URI) or it can point to some location entirely outside the SCA

4487 Domain.

4488

4489 • It is expected that SCA runtimes can define implementation specific ways of resolving location

4490 information for artifact resolution between contributions. These mechanisms will however usually be

4491 limited to sets of contributions of one runtime technology and one hosting environment.

4492 In order to accommodate imports of artifacts between contributions of disparate runtime technologies, it is

4493 strongly suggested that SCA runtimes honor SCA contribution URIs as location specification.

4494 | SCA runtimes that support contribution URIs for cross-contribution resolution of SCA artifacts are
4495 | expected to do so similarly when used as @schemaLocation and @wsdlLocation and other artifact
4496 | location specifications.

4497 | The order in which the import statements are specified can play a role in this mechanism. Since
4498 | definitions of one namespace can be distributed across several artifacts, multiple import declarations can
4499 | be made for one namespace.

4500 | The location value is only a default, and dependent contributions listed in the call to installContribution
4501 | can override the value if there is a conflict. However, the specific mechanism for resolving conflicts
4502 | between contributions that define conflicting definitions is implementation specific.

4503 | If the value of the @location attribute is an SCA contribution URI, then the contribution packaging can
4504 | become dependent on the deployment environment. In order to avoid such a dependency, it is
4505 | recommended that dependent contributions are specified only when deploying or updating contributions
4506 | as specified in the section 'Operations for Contributions' below.

4507 | **11.2.310.2.3 Contribution Packaging using ZIP**

4508 | SCA allows many different packaging formats that SCA runtimes can support, but **SCA requires that all**
4509 | **runtimes MUST support the ZIP packaging format for contributions.** **SCA requires that all runtimes MUST**
4510 | **support the ZIP packaging format for contributions.** [ASM12006] This format allows that metadata
4511 | specified by the section 'SCA Contribution Metadata Document' be present. Specifically, it can contain a
4512 | top-level "META-INF" directory and a "META-INF/sca-contribution.xml" file and there can also be a
4513 | "META-INF/sca-contribution-generated.xml" file in the package. SCA defined artifacts as well as non-SCA
4514 | defined artifacts such as object files, WSDL definition, Java classes can be present anywhere in the ZIP
4515 | archive,

4516 | A definition of the ZIP file format is published by PKWARE in an [Application Note on the .ZIP file format](#)
4517 | [\[42ZIP-FORMAT\]](#).

4518 | **10.3 States of Artifacts in the Domain**

4519 | Artifacts in the SCA domain are in one of 3 states:

- 4520 |
- 4521 | 1. Installed
 - 4522 | 2. Deployed
 - 4523 | 3. Running
- 4524 |

4525 | Installed artifacts are artifacts that are part of a Contribution that is installed into the Domain. Installed
4526 | artifacts are available for use by other artifacts that are deployed. See "install Contribution" and "remove
4527 | Contribution" to understand how artifacts are installed and uninstalled.

4528 | Deployed artifacts are artifacts that are available to the SCA runtime to be run.. Artifacts are deployed
4529 | either through explicit deployment actions or through the presence of <deployable/> elements in sca-
4530 | contribution.xml files within a Contribution. If an artifact is deployed which has dependencies on other
4531 | artifacts, then those dependent artifacts are also deployed.

4532 | When the SCA runtime has one or more deployable artifacts, the runtime attempts to put those artifacts
4533 | and any artifacts they depend on into the Running state. This can fail due to errors in one or more of the
4534 | artifacts or the process can be delayed until all dependencies are available.

4535 | **Checking for errors in artifacts MUST NOT be done for artifacts in the Installed state (ie where the**
4536 | **artifacts are simply part of installed contributions)** **Checking for errors in artifacts MUST NOT be done for**
4537 | **artifacts in the Installed state (ie where the artifacts are simply part of installed contributions)** [ASM12032]

4538 | **Errors in artifacts MUST be detected either during the Deployment of the artifacts, or during the process**
4539 | **of putting the artifacts into the Running state.** **Errors in artifacts MUST be detected either during the**
4540 | **Deployment of the artifacts, or during the process of putting the artifacts into the Running state.**
4541 | **[ASM12033]**

11.3.10.4 Installed Contribution

As noted in the section above, the contents of a contribution do not need to be modified in order to install and use it within a Domain. An *installed contribution* is a contribution with all of the associated information necessary in order to execute *deployable composites* within the contribution.

An installed contribution is made up of the following things:

- Contribution Packaging – the contribution that will be used as the starting point for resolving all references
- Contribution base URI
- Dependent contributions: a set of snapshots of other contributions that are used to resolve the import statements from the root composite and from other dependent contributions
 - Dependent contributions might or might not be shared with other installed contributions.
 - When the snapshot of any contribution is taken is implementation defined, ranging from the time the contribution is installed to the time of execution
- Deployment-time composites.
These are composites that are added into an installed contribution after it has been deployed. This makes it possible to provide final configuration and access to implementations within a contribution without having to modify the contribution. These do not have to be provided as composites that already exist within the contribution can also be used for deployment.

Installed contributions provide a context in which to resolve qualified names (e.g. QNames in XML, fully qualified class names in Java).

If multiple dependent contributions have exported definitions with conflicting qualified names, the algorithm used to determine the qualified name to use is implementation dependent. Implementations of SCA MAY also raise an error if there are conflicting names exported from multiple contributions. [ASM12007]

11.3.410.4.1 Installed Artifact URIs

When a contribution is installed, all artifacts within the contribution are assigned URIs, which are constructed by starting with the base URI of the contribution and adding the relative URI of each artifact (recalling that SCA demands that any packaging format be able to offer up its artifacts in a single hierarchy).

11.410.5 Operations for Contributions

SCA Runtimes provide the following conceptual functionality associated with contributions to the Domain (meaning the function might not be represented as addressable services and also meaning that equivalent functionality might be provided in other ways). An SCA runtime MAY provide the contribution operation functions (install Contribution, update Contribution, add Deployment Composite, update Deployment Composite, remove Contribution). [ASM12008]

11.4.410.5.1 install Contribution & update Contribution

Creates or updates an installed contribution with a supplied root contribution, and installed at a supplied base URI. A supplied dependent contribution list (<export/> elements) specifies the contributions that are used to resolve the dependencies of the root contribution and other dependent contributions. These override any dependent contributions explicitly listed via the @location attribute in the import statements of the contribution.

SCA follows the simplifying assumption that the use of a contribution for resolving anything also means that all other exported artifacts can be used from that contribution. Because of this, the dependent contribution list is just a list of installed contribution URIs. There is no need to specify what is being used from each one.

Each dependent contribution is also an installed contribution, with its own dependent contributions. By default these dependent contributions of the dependent contributions (which we will call *indirect dependent contributions*) are included as dependent contributions of the installed contribution. However, if a contribution in the dependent contribution list exports any conflicting definitions with an indirect dependent contribution, then the indirect dependent contribution is not included (i.e. the explicit list overrides the default inclusion of indirect dependent contributions). Also, **if there is ever a conflict between two indirect dependent contributions, then the conflict MUST be resolved by an explicit entry in the dependent contribution list.** ~~if there is ever a conflict between two indirect dependent contributions, then the conflict MUST be resolved by an explicit entry in the dependent contribution list.~~ [ASM12009]

Note that in many cases, the dependent contribution list can be generated. In particular, if the creator of a Domain is careful to avoid creating duplicate definitions for the same qualified name, then it is easy for this list to be generated by tooling.

11.4.210.5.2 add Deployment Composite & update Deployment Composite

Adds or updates a deployment composite using a supplied composite ("composite by value" – a data structure, not an existing resource in the Domain) to the contribution identified by a supplied contribution URI. The added or updated deployment composite is given a relative URI that matches the @name attribute of the composite, with a ".composite" suffix. Since all composites run within the context of a installed contribution (any component implementations or other definitions are resolved within that contribution), this functionality makes it possible for the deployer to create a composite with final configuration and wiring decisions and add it to an installed contribution without having to modify the contents of the root contribution.

Also, in some use cases, a contribution might include only implementation code (e.g. PHP scripts). It is then possible for those to be given component names by a (possibly generated) composite that is added into the installed contribution, without having to modify the packaging.

11.4.310.5.3 remove Contribution

Removes the deployed contribution identified by a supplied contribution URI.

11.510.6 Use of Existing (non-SCA) Mechanisms for Resolving Artifacts

For certain types of artifact, there are existing and commonly used mechanisms for referencing a specific concrete location where the artifact can be resolved.

Examples of these mechanisms include:

- For WSDL files, the **@wsdlLocation** attribute is a hint that has a URI value pointing to the place holding the WSDL itself.
- For XSDs, the **@schemaLocation** attribute is a hint which matches the namespace to a URI where the XSD is found.

Note: In neither of these cases is the runtime obliged to use the location hint and the URI does not have to be dereferenced.

SCA permits the use of these mechanisms **Where present, non-SCA artifact resolution mechanisms MUST be used by the SCA runtime in precedence to the SCA mechanisms.** ~~Where present, non-SCA artifact resolution mechanisms MUST be used by the SCA runtime in precedence to the SCA mechanisms.~~ [ASM12010] However, use of these mechanisms is discouraged because tying assemblies to addresses in this way makes the assemblies less flexible and prone to errors when changes are made to the overall SCA Domain.

Note: **If one of the non-SCA artifact resolution mechanisms is present, but there is a failure to find the resource indicated when using the mechanism (e.g. the URI is incorrect or invalid, say) the SCA runtime MUST raise an error and MUST NOT attempt to use SCA resolution mechanisms as an alternative.** ~~If one of the non-SCA artifact resolution mechanisms is present, but there is a failure to find the resource~~

indicated when using the mechanism (e.g. the URI is incorrect or invalid, say) the SCA runtime MUST raise an error and MUST NOT attempt to use SCA resolution mechanisms as an alternative. [ASM12011]

11.6.10.7 Domain-Level Composite

The domain-level composite is a virtual composite, in that it is not defined by a composite definition document. Rather, it is built up and modified through operations on the Domain. However, in other respects it is very much like a composite, since it contains components, wires, services and references.

The value of @autowire for the logical Domain composite MUST be autowire="false". The value of @autowire for the logical Domain composite MUST be autowire="false". [ASM12012]

For components at the Domain level, with References references for which @autowire="true" applies, the behaviour of the SCA runtime for a given Domain MUST take ONE of the 3 following forms:

1) The SCA runtime MAY disallow deployment of any components with autowire References references. In this case, the SCA runtime MUST raise an exception at the point where the component is deployed.

2) The SCA runtime MAY evaluate evaluates the target(s) for the reference at the time that the component is deployed and does not update those targets when later deployment actions occur.

3) The SCA runtime MAY re-evaluate evaluates the target(s) for the reference dynamically as later deployment actions occur resulting in updated reference targets which match the new Domain configuration. How the new reconfiguration of the reference takes place is described by the relevant client and implementation specifications. For components at the Domain level, with References references for which @autowire="true" applies, the behaviour of the SCA runtime for a given Domain MUST take ONE of the 3 following forms:

1) The SCA runtime MAY disallow deployment of any components with autowire References references. In this case, the SCA runtime MUST raise an exception at the point where the component is deployed.

2) The SCA runtime MAY evaluate evaluates the target(s) for the reference at the time that the component is deployed and does not update those targets when later deployment actions occur.

3) The SCA runtime MAY re-evaluate evaluates the target(s) for the reference dynamically as later deployment actions occur resulting in updated reference targets which match the new Domain configuration. How the new configuration of the reference takes place is described by the relevant client and implementation specifications. For components at the Domain level, with References references for which @autowire="true" applies, the behaviour of the SCA runtime for a given Domain MUST take ONE of the 3 following forms:

1) The SCA runtime MAY disallow deployment of any components with autowire References. In this case, the SCA runtime MUST raise an exception at the point where the component is deployed.

2) The SCA runtime MAY evaluate the target(s) for the reference at the time that the component is deployed and not update those targets when later deployment actions occur.

3) The SCA runtime MAY re-evaluate the target(s) for the reference dynamically as later deployment actions occur resulting in updated reference targets which match the new Domain configuration. How the new configuration of the reference takes place is described by the relevant client and implementation specifications.

[ASM12013]

The abstract domain-level functionality for modifying the domain-level composite is as follows, although a runtime can supply equivalent functionality in a different form:

11.6.10.7.1 add To Domain-Level Composite

This functionality adds the composite identified by a supplied URI to the Domain Level Composite. The supplied composite URI refers to a composite within an installed contribution. The composite's installed contribution determines how the composite's artifacts are resolved (directly and indirectly). The supplied composite is added to the domain composite with semantics that correspond to the domain-level

4682 composite having an <include> statement that references the supplied composite. All of the composites
4683 components become top-level components and the component services become externally visible
4684 services (eg. they would be present in a WSDL description of the Domain). The meaning of any promoted
4685 services and references in the supplied composite is not defined; since there is no composite scope
4686 outside the domain composite, the usual idea of promotion has no utility.

4687 **11.6.210.7.2 remove From Domain-Level Composite**

4688 Removes from the Domain Level composite the elements corresponding to the composite identified by a
4689 supplied composite URI. This means that the removal of the components, wires, services and references
4690 originally added to the domain level composite by the identified composite.

4691 **11.6.310.7.3 get Domain-Level Composite**

4692 Returns a <composite> definition that has an <include> line for each composite that had been added to
4693 the domain level composite. It is important to note that, in dereferencing the included composites, any
4694 referenced artifacts are resolved in terms of that installed composite.

4695 **11.6.410.7.4 get QName Definition**

4696 In order to make sense of the domain-level composite (as returned by get Domain-Level Composite), it
4697 needs to be possible to get the definitions for named artifacts in the included composites. This
4698 functionality takes the supplied URI of an installed contribution (which provides the context), a supplied
4699 qualified name of a definition to look up, and a supplied symbol space (as a QName, e.g.
4700 wsdl:PortTypeportType). The result is a single definition, in whatever form is appropriate for that
4701 definition type.

4702 Note that this, like all the other domain-level operations, is a conceptual operation. Its capabilities need to
4703 exist in some form, but not necessarily as a service operation with exactly this signature.

4704 **11.710.8 Dynamic Behaviour of Wires in the SCA Domain**

4705 For components with references which are at the Domain level, there is the potential for dynamic
4706 behaviour when the wires for a component reference change (this can only apply to component
4707 references at the Domain level and not to components within composites used as implementations):

4708 The configuration of the wires for a component reference of a component at the Domain level can change
4709 by means of deployment actions:

- 4710 1. <wire/> elements can be added, removed or replaced by deployment actions
- 4711 2. Components can be updated by deployment actions (i.e. this can change the
4712 component reference configuration)
- 4713 3. Components which are the targets of reference wires can be updated or removed
- 4714 4. Components can be added that are potential targets for references which are
4715 marked with @autowire=true

4716

4717 Where <wire/> elements are added, removed or replaced by deployment actions, the components whose
4718 references are affected by those deployment actions MAY have their references updated by the SCA
4719 runtime dynamically without the need to stop and start those components. [ASM12014]

4720 Where components are updated by deployment actions (their configuration is changed in some way,
4721 which includes changing the wires of component references), the new configuration MUST apply to all
4722 new instances of those components once the update is complete. Where components are updated by
4723 deployment actions (their configuration is changed in some way, which includes changing the wires of
4724 component references), the new configuration MUST apply to all new instances of those components
4725 once the update is complete. [ASM12015] An SCA runtime MAY choose to maintain existing instances

with the old configuration of components updated by deployment actions, but an SCA runtime MAY choose to stop and discard existing instances of those components. [ASM12016]

Where a component that is the target of a wire is removed, without the wire being changed, then future invocations of the reference that use that wire SHOULD fail with a ServiceUnavailable fault. If the wire is the result of the autowire process, the SCA runtime MUST:

- either cause future invocation of the target component's services to fail with a ServiceUnavailable fault

—or alternatively, if an alternative target component is available that satisfies the autowire process, update the reference of the source component Where a component that is the target of a wire is removed, without the wire being changed, then future invocations of the reference that use that wire SHOULD fail with a ServiceUnavailable fault. If the wire is the result of the autowire process, the SCA runtime MUST:

either cause future invocation of the target component's services to fail with a ServiceUnavailable fault or alternatively, if an alternative target component is available that satisfies the autowire process, update the reference of the source component Where a component that is the target of a wire is removed, without the wire being changed, then future invocations of the reference that use that wire SHOULD fail with a ServiceUnavailable fault. If the wire is the result of the autowire process, the SCA runtime MUST:

- either cause future invocation of the target component's services to fail with a ServiceUnavailable fault
- or alternatively, if an alternative target component is available that satisfies the autowire process, update the reference of the source component [ASM12017]

Where a component that is the target of a wire is updated, future invocations of that reference SHOULD use the updated component. [ASM12018]

Where a component is added to the Domain that is a potential target for a domain level component reference where that reference is marked as @autowire=true, the SCA runtime MUST:

- either update the references for the source component once the new component is running.
- or alternatively, defer the updating of the references of the source component until the source component is stopped and restarted. Where a component is added to the Domain that is a potential target for a domain level component reference where that reference is marked as @autowire=true, the SCA runtime MUST:

either update the references for the source component once the new component is running; or alternatively, defer the updating of the references of the source component until the source component is stopped and restarted. Where a component is added to the Domain that is a potential target for a domain level component reference where that reference is marked as @autowire=true, the SCA runtime MUST:

- either update the references for the source component once the new component is running;
- or alternatively, defer the updating of the references of the source component until the source component is stopped and restarted. [ASM12020]

11.810.9 Dynamic Behaviour of Component Property Values

For a domain level component with a Property whose value is obtained from a Domain level Property through the use of the @source attribute, if the domain level property is updated by means of deployment actions, the SCA runtime MUST

- either update the property value of the domain level component once the update of the domain property is complete
- or defer the updating of the component property value until the component is stopped and restarted

4772 For a domain level component with a Property whose value is obtained from a Domain-level Property
4773 through the use of the @source attribute, if the domain level property is updated by means of deployment
4774 actions, the SCA runtime MUST

- 4775 • either update the property value of the domain level component once the update of the domain
4776 property is complete
- 4777 • or defer the updating of the component property value until the component is stopped and
4778 restartedFor a domain level component with a Property whose value is obtained from a Domain-level
4779 Property through the use of the @source attribute, if the domain level property is updated by means of
4780 deployment actions, the SCA runtime MUST
- 4781 • either update the property value of the domain level component once the update of the domain
4782 property is complete
- 4783 • or defer the updating of the component property value until the component is stopped and
4784 restarted

4785 [ASM12034]

1211 SCA Runtime Considerations

This section describes aspects of an SCA Runtime that are defined by this specification.

12.111.1 Error Handling

The SCA Assembly specification identifies situations where the configuration of the SCA Domain and its contents are in error. When one of these situations occurs, the specification requires that the SCA Runtime that is interacting with the SCA Domain and the artifacts it contains recognises that there is an error, raise the error in a suitable manner and also refuse to run components and services that are in error.

The SCA Assembly specification is not prescriptive about the functionality of an SCA Runtime and the specification recognizes that there can be a range of design points for an SCA runtime. As a result, the SCA Assembly specification describes a range of error handling approaches which can be adopted by an SCA runtime.

An SCA Runtime MUST raise an error for every situation where the configuration of the SCA Domain or its contents are in error. The error is either raised at deployment time or at runtime, depending on the nature of the error and the design of the SCA Runtime. An SCA Runtime MUST raise an error for every situation where the configuration of the SCA Domain or its contents are in error. The error is either raised at deployment time or at runtime, depending on the nature of the error and the design of the SCA Runtime. [ASM14005]

12.1.111.1.1 Errors which can be Detected at Deployment Time

Some error situations can be detected at the point that artifacts are deployed to the Domain. An example is a composite document that is invalid in a way that can be detected by static analysis, such as containing a component with two services with the same @name attribute.

An SCA runtime SHOULD detect errors at deployment time where those errors can be found through static analysis. ~~An SCA runtime SHOULD detect errors at deployment time where those errors can be found through static analysis.~~ [ASM14001] The SCA runtime SHOULD prevent deployment of contributions that are in error, and raise the error to the process performing the deployment (e.g. write a message to an interactive console or write a message to a log file). ~~The SCA runtime SHOULD prevent deployment of contributions that are in error, and raise the error to the process performing the deployment (e.g. write a message to an interactive console or write a message to a log file).~~ [ASM14002]

The SCA Assembly specification recognizes that there are reasons why a particular SCA runtime finds it desirable to deploy contributions that contain errors (e.g. to assist in the process of development and debugging) - and as a result also supports an error handling strategy that is based on detecting problems at runtime. However, it is wise to consider reporting problems at an early stage in the deployment process.

12.1.211.1.2 Errors which are Detected at Runtime

An SCA runtime can detect problems at runtime. These errors can include some which can be found from static analysis (e.g. the inability to wire a reference because the target service does not exist in the Domain) and others that can only be discovered dynamically (e.g. the inability to invoke some remote Web service because the remote endpoint is unavailable).

Where errors can be detected through static analysis, the principle is that components that are known to be in error are not run. So, for example, if there is a component with a required reference (multiplicity 1..1 or 1..n) which is not wired, best practice is that the component is not run. If an attempt is made to invoke a service operation of that component, a "ServiceUnavailable" fault is raised to the invoker. It is also regarded as best practice that errors of this kind are also raised through appropriate management interfaces, for example to the deployer or to the operator of the system.

4831 | ~~Where errors are only detected at runtime, when the error is detected an error MUST be raised to the~~
4832 | ~~component that is attempting the activity concerned with the error.~~~~Where errors are only detected at~~
4833 | ~~runtime, when the error is detected an error MUST be raised to the component that is attempting the~~
4834 | ~~activity concerned with the error. [ASM14003]~~ For example, if a component invokes an operation on a
4835 | reference, but the target service is unavailable, a "ServiceUnavailable" fault is raised to the component.
4836 | ~~When an error that could have been detected through static analysis is detected and raised at runtime for~~
4837 | ~~a component, the component SHOULD NOT be run until the error is fixed.~~~~When an error that could have~~
4838 | ~~been detected through static analysis is detected and raised at runtime for a component, the component~~
4839 | ~~SHOULD NOT be run until the error is fixed. [ASM14004]~~ Such errors can be fixed by redeployment or
4840 | deployment of other components in the domain.

1312 Conformance

The XML schema pointed to by the RDDL document at the namespace URI, defined by this specification, are considered to be authoritative and take precedence over the XML schema defined in the appendix of this document.

~~An SCA runtime MUST reject a composite file that does not conform to the sca-core.xsd, sca-interface-wsdl.xsd, sca-implementation-composite.xsd and sca-binding-sca.xsd schema. An SCA runtime MUST reject a composite file that does not conform to the sca-core.xsd, sca-interface-wsdl.xsd, sca-implementation-composite.xsd and sca-binding-sca.xsd schema. [ASM13001]~~

~~An SCA runtime MUST reject a contribution file that does not conform to the sca-contribution.xsd schema. An SCA runtime MUST reject a contribution file that does not conform to the sca-contribution.xsd schema. [ASM13002]~~

~~An SCA runtime MUST reject a definitions file that does not conform to the sca-definitions.xsd schema. An SCA runtime MUST reject a definitions file that does not conform to the sca-definitions.xsd schema. [ASM13003]~~

There are two categories of artifacts that this specification defines conformance for: SCA Documents and SCA Runtimes.

13.12.1 SCA Documents

For a document to be a valid SCA Document, it MUST comply with one of the SCA document types below:

SCA Composite Document:

An SCA Composite Document is a file that MUST have an SCA <composite/> element as its root element and MUST conform to the sca-core-1.1.xsd schema and MUST comply with the additional constraints on the document contents as defined in Appendix C.

SCA ComponentType Document:

An SCA ComponentType Document is a file that MUST have an SCA <componentType/> element as its root element and MUST conform to the sca-core-1.1.xsd schema and MUST comply with the additional constraints on the document contents as defined in Appendix C.

~~SCA ConstrainingType Document:~~

~~An SCA ConstrainingType Document is a file that MUST have an SCA <constrainingType/> element as its root element and MUST conform to the sca-core-1.1.xsd schema and MUST comply with the additional constraints on the document contents as defined in Appendix C.~~

SCA Definitions Document:

An SCA Definitions Document is a file that MUST have an SCA <definitions/> element as its root and MUST conform to the sca-definition-1.1.xsd schema and MUST comply with the additional constraints on the document contents as defined in Appendix C.

SCA Contribution Document:

An SCA Contribution Document is a file that MUST have an SCA <contribution/> element as its root element and MUST conform to the sca-contribution-1.1.xsd schema and MUST comply with the additional constraints on the document contents as defined in Appendix C.

SCA Interoperable Packaging Document:

A ZIP file containing SCA Documents and other related artifacts. The ZIP file SHOULD contain a top-level "META-INF" directory, and SHOULD contain a "META-INF/sca-contribution.xml" file, and MAY contain a "META-INF/sca-contribution-generated.xml" file.

4886
4887

4888 **13.212.2 SCA Runtime**

4889 An implementation that claims to conform to the requirements of an SCA Runtime defined in this
4890 specification MUST meet the following conditions:

- 4891 1. The implementation MUST comply with all mandatory statements listed in table
4892 ~~Appendix C~~Mandatory Items in Appendix C: Conformance Items, related to an SCA
4893 Runtime, ~~notably all MUST statements have to be implemented.~~
- 4894 2. The implementation MUST conform to the SCA Policy Framework v 1.1 Specification [Policy].
- 4895 3. The implementation MUST support and comply with at least one of the OpenCSA Member
4896 Section adopted implementation types.
- 4897 4. The implementation MUST support binding.sca and MUST support and conform to the SCA
4898 Web Service Binding Specification v 1.1.

4899 **12.2.1 Optional Items**

4900 In addition to mandatory items, Appendix C: Conformance Items lists a number of non-mandatory items
4901 that can be implemented SCA Runtimes. These items are categorized into functionally related classes as
4902 follows:

- 4903 • Development – items to improve the development of SCA contributions, debugging, etc.
- 4904 • Enhancement – items that add functionality and features to the SCA Runtime.
- 4905 • Interoperation – items that improve interoperability of SCA contributions and Runtimes

4906 These classifications are not rigid and some may overlap; items are classified according to their primary
4907 intent.

4908

A. XML Schemas

A.1 sca.xsd

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Copyright(C) OASIS(R) 2005,2010. All Rights Reserved.
      OASIS trademark, IPR and other policies apply. -->
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200912"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200912">

  <include schemaLocation="sca-core-1.1-cd05.xsd"/>

  <include schemaLocation="sca-interface-java-1.1-cd04.xsd"/>
  <include schemaLocation="sca-interface-wsdl-1.1-cd05.xsd"/>
  <include schemaLocation="sca-interface-cpp-1.1-cd04.xsd"/>
  <include schemaLocation="sca-interface-c-1.1-cd04.xsd"/>

  <include schemaLocation="sca-implementation-java-1.1-cd02.xsd"/>
  <include schemaLocation="sca-implementation-composite-1.1-cd05.xsd"/>
  <include schemaLocation="sca-implementation-cpp-1.1-cd04.xsd"/>
  <include schemaLocation="sca-implementation-c-1.1-cd04.xsd"/>
  <include schemaLocation="sca-implementation-bpel-1.1-cd03.xsd"/>
  <include schemaLocation="sca-implementation-spring-1.1-cd01.xsd"/>

  <include schemaLocation="sca-binding-ws-1.1-cd04.xsd"/>
  <include schemaLocation="sca-binding-ws-callback-1.1-cd04.xsd"/>
  <include schemaLocation="sca-binding-jms-1.1-cd04.xsd"/>
  <include schemaLocation="sca-binding-jca-1.1-cd04.xsd"/>
  <include schemaLocation="sca-binding-sca-1.1-cd05.xsd"/>
  <include schemaLocation="sca-binding-ejb-1.1-cd01.xsd"/>

  <include schemaLocation="sca-definitions-1.1-cd05.xsd"/>
  <include schemaLocation="sca-policy-1.1-cd03.xsd"/>

  <include schemaLocation="sca-contribution-1.1-cd05.xsd"/>
  <include schemaLocation="sca-contribution-cpp-1.1-cd04.xsd"/>
  <include schemaLocation="sca-contribution-c-1.1-cd04.xsd"/>
  <include schemaLocation="sca-contribution-java-1.1-cd02.xsd"/>
</schema>
```

A.2 sca-core.xsd

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved.
      OASIS trademark, IPR and other policies apply. -->
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200912"
  targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200903"
  xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903">

<include schemaLocation="sca-core-1.1-cd03.xsd"/>

<include schemaLocation="sca-interface-java-1.1-cd03.xsd"/>
<include schemaLocation="sca-interface-wsdl-1.1-cd03.xsd"/>
<include schemaLocation="sca-interface-cpp-1.1-cd02.xsd"/>
<include schemaLocation="sca-interface-c-1.1-cd02.xsd"/>
```

```

4963 <include schemaLocation="sca-implementation-java-1.1-cd01.xsd"/>
4964 <include schemaLocation="sca-implementation-composite-1.1-cd03.xsd"/>
4965 <include schemaLocation="sca-implementation-cpp-1.1-cd02.xsd"/>
4966 <include schemaLocation="sca-implementation-c-1.1-cd02.xsd"/>
4967 <include schemaLocation="sca-implementation-bpel-1.1-cd02.xsd"/>
4968
4969 <include schemaLocation="sca-binding-ws-1.1-cd02.xsd"/>
4970 <include schemaLocation="sca-binding-jms-1.1-cd02.xsd"/>
4971 <include schemaLocation="sca-binding-jea-1.1-cd02.xsd"/>
4972 <include schemaLocation="sca-binding-sca-1.1-cd03.xsd"/>
4973
4974 <include schemaLocation="sca-definitions-1.1-cd03.xsd"/>
4975 <include schemaLocation="sca-policy-1.1-cd02.xsd"/>
4976
4977 <include schemaLocation="sca-contribution-1.1-cd03.xsd"/>
4978 <include schemaLocation="sca-contribution-cpp-1.1-cd02.xsd"/>
4979 <include schemaLocation="sca-contribution-c-1.1-cd02.xsd"/>
4980
4981 </schema>
4982

```

A.2sca-core.xsd

```

4983
4984
4985 <?xml version="1.0" encoding="UTF-8"?>
4986 <!-- Copyright (C) OASIS (R) 2005, 2009. All Rights Reserved.
4987 OASIS trademark, IPR and other policies apply. -->
4988 <schema xmlns="http://www.w3.org/2001/XMLSchema"
4989 xmlns:sca="http://docs.oasis-open.org/ns/openesa/sca/200903"
4990 targetNamespace="http://docs.oasis-
4991 open.org/ns/openesa/sca/200903200912"
4992 elementFormDefault="qualified">
4993
4994 <include schemaLocation="sca-policy-1.1-cd03.xsd"/>
4995 <import namespace="http://www.w3.org/XML/1998/namespace"
4996 schemaLocation="http://www.w3.org/2001/xml.xsd"/>
4997
4998 <!-- Common extension base for SCA definitions -->
4999 <complexType name="CommonExtensionBase">
5000 <sequence>
5001 <element ref="sca:documentation" minOccurs="0"
5002 maxOccurs="unbounded"/>
5003 </sequence>
5004 <anyAttribute namespace="##other" processContents="lax"/>
5005 </complexType>
5006
5007 <element name="documentation" type="sca:Documentation"/>
5008 <complexType name="Documentation" mixed="true">
5009 <sequence>
5010 <any namespace="##other" processContents="lax" minOccurs="0"
5011 maxOccurs="unbounded"/>
5012 </sequence>
5013 <attribute ref="xml:lang"/>
5014 </complexType>
5015
5016 <!-- Component Type -->
5017 <element name="componentType" type="sca:ComponentType"/>
5018 <complexType name="ComponentType">
5019 <complexContent>
5020 <extension base="sca:CommonExtensionBase">

```

```

5021         <sequence>
5022             <element ref="sca:implementation" minOccurs="0"/>
5023             <choice minOccurs="0" maxOccurs="unbounded">
5024                 <element name="service" type="sca:ComponentService"/>
5025                 <element name="reference"
5026                     type="sca:ComponentTypeReference"/>
5027                 <element name="property" type="sca:Property"/>
5028             </choice>
5029             <any namespace="##other" processContents="lax" minOccurs="0"
5030                 maxOccurs="unbounded"/>
5031         </sequence>
5032         <attribute name="constrainingType" type="QName" use="optional"/>
5033     </extension>
5034 </complexType>
5035 </complexType>
5036
5037 <!-- Composite -->
5038 <element name="composite" type="sca:Composite"/>
5039 <complexType name="Composite">
5040     <complexContent>
5041         <extension base="sca:CommonExtensionBase">
5042             <sequence>
5043                 <element name="ref"="sca:include" type="anyURI" minOccurs="0"
5044                     maxOccurs="unbounded"/>
5045                 <choice minOccurs="0" maxOccurs="unbounded">
5046                     <element ref="sca:requires"/>
5047                     <element ref="sca:policySetAttachment"/>
5048                     <element name="service" type="sca:Service"/>
5049                     <element name="property" type="sca:Property"/>
5050                     <element name="component" type="sca:Component"/>
5051                     <element name="reference" type="sca:Reference"/>
5052                     <element name="wire" type="sca:Wire"/>
5053                 </choice>
5054                 <any namespace="##other" processContents="lax" minOccurs="0"
5055                     maxOccurs="unbounded"/>
5056             </sequence>
5057             <attribute name="name" type="NCName" use="required"/>
5058             <attribute name="targetNamespace" type="anyURI" use="required"/>
5059             <attribute name="local" type="boolean" use="optional"
5060                 default="false"/>
5061             <attribute name="autowire" type="boolean" use="optional"
5062                 default="false"/>
5063         <attribute name="constrainingType" type="QName" use="optional"/>
5064         <attribute name="requires" type="sca:listOfQNames"
5065             use="optional"/>
5066         <attribute name="policySets" type="sca:listOfQNames"
5067             use="optional"/>
5068     </extension>
5069 </complexContent>
5070 </complexType>
5071
5072 <!-- Contract base type for Service, Reference -->
5073 <complexType name="Contract" abstract="true">
5074     <complexContent>
5075         <extension base="sca:CommonExtensionBase">
5076             <sequence>
5077                 <element ref="sca:interface" minOccurs="0" maxOccurs="1" />
5078                 <element ref="sca:binding" minOccurs="0"
5079                     maxOccurs="unbounded" />
5080                 <element ref="sca:callback" minOccurs="0" maxOccurs="1" />
5081                 <any namespace="##other" processContents="lax" element
5082 ref="sca:requires" minOccurs="0"
5083 maxOccurs="unbounded"/>

```

```

5084         <element ref="sca:policySetAttachment" minOccurs="0"
5085             maxOccurs="unbounded" />
5086         <element ref="sca:extensions" minOccurs="0" maxOccurs="1" />
5087     </sequence>
5088     <attribute name="name" type="NCName" use="required" />
5089     <attribute name="requires" type="sca:listOfQNames"
5090         use="optional" />
5091     <attribute name="policySets" type="sca:listOfQNames"
5092         use="optional" />
5093 </extension>
5094 </complexType>
5095 </complexType>
5096
5097 <!-- Service -->
5098 <complexType name="Service">
5099     <complexContent>
5100         <extension base="sca:Contract">
5101             <attribute name="promote" type="anyURI" use="required" />
5102         </extension>
5103     </complexContent>
5104 </complexType>
5105
5106 <!-- Interface -->
5107 <element name="interface" type="sca:Interface" abstract="true" />
5108 <complexType name="Interface" abstract="true">
5109     <complexContent>
5110         <extension base="sca:CommonExtensionBase">
5111             <choice minOccurs="0" maxOccurs="unbounded">
5112                 <element ref="sca:requires" />
5113                 <element ref="sca:policySetAttachment" />
5114             </choice>
5115             <attribute name="remotable" type="boolean" use="optional" />
5116             <attribute name="requires" type="sca:listOfQNames"
5117                 use="optional" />
5118             <attribute name="policySets" type="sca:listOfQNames"
5119                 use="optional" />
5120         </extension>
5121     </complexContent>
5122 </complexType>
5123
5124 <!-- Reference -->
5125 <complexType name="Reference">
5126     <complexContent>
5127         <extension base="sca:Contract">
5128             <attribute name="autowire" type="boolean" use="optional" />
5129             <attribute name="target" type="sca:listOfAnyURIs"
5130                 use="optional" />
5131             <attribute name="wiredByImpl" type="boolean" use="optional"
5132                 default="false" />
5133             <attribute name="multiplicity" type="sca:Multiplicity"
5134                 use="optional" default="1..1required" />
5135             <attribute name="promote" type="sca:listOfAnyURIs"
5136                 use="required" />
5137         </extension>
5138     </complexContent>
5139 </complexType>
5140
5141 <!-- Property -->
5142 <complexType name="SCAPropertyBase" mixed="true">
5143     <sequence>
5144         <any namespace="##any" processContents="lax" minOccurs="0"
5145             maxOccurs="unbounded" />
5146         <!-- NOT an extension point; This any exists to accept
5147             the element-based or complex type property

```

```

5148         i.e. no element-based extension point under "sca:property" -->
5149     </sequence>
5150     <!-- mixed="true" to handle simple type -->
5151     <attribute name="requiresName" type="sca:listOfQNamesNCName"
5152 use="required"/>
5153     <attribute name="type" type="QName" use="optional"/>
5154     <attribute name="policySetElement" type="sca:listOfQNamesQName"
5155 use="optional"/>
5156     <attribute name="many" type="boolean" use="optional" default="false"/>
5157     <attribute name="value" type="anySimpleType" use="optional"/>
5158     <anyAttribute namespace="##other" processContents="lax"/>
5159 </complexType>
5160
5161 <complexType name="Property" mixed="true">
5162 <complexContent mixed="true">
5163 <extension base="sca:SCAPropertyBase">
5164 <attribute name="name" type="NCName" use="required"/>
5165 <attribute name="type" type="QName" use="optional"/>
5166 <attribute name="element" type="QName" use="optional"/>
5167 <attribute name="many" type="boolean" use="optional"
5168 default="false"/>
5169 <attribute name="mustSupply" type="boolean" use="optional"
5170 default="false"/>
5171 <anyAttribute namespace="##any" processContents="lax"/>
5172 </extension>
5173 <!-- extension defines the place to hold default value -->
5174 <!-- an extension point ; attribute based only -->
5175 </complexContent>
5176 </complexType>
5177
5178 <!-- ConstrainingProperty is equivalent to the Property type but removes
5179 the capability to contain a value -->
5180 <complexType name="ConstrainingProperty" mixed="true">
5181 <complexContent mixed="true">
5182 <restriction base="sca:Property">
5183 <attribute name="name" type="NCName" use="required"/>
5184 <attribute name="type" type="QName" use="optional"/>
5185 <attribute name="element" type="QName" use="optional"/>
5186 <attribute name="many" type="boolean" use="optional"
5187 default="false"/>
5188 <attribute name="mustSupply" type="boolean" use="optional"
5189 default="false"/>
5190 <anyAttribute namespace="##any" processContents="lax"/>
5191 </restriction>
5192 </complexContent>
5193 </complexType>
5194
5195 <complexType name="PropertyValue" mixed="true">
5196 <complexContent mixed="true">
5197 <extension base="sca:SCAPropertyBase">
5198 <attribute name="name" type="NCName" use="required"/>
5199 <attribute name="type" type="QName" use="optional"/>
5200 <attribute name="element" type="QName" use="optional"/>
5201 <attribute name="many" type="boolean" use="optional"
5202 default="false"/>
5203 <attribute name="source" type="string" use="optional"/>
5204 <attribute name="file" type="anyURI" use="optional"/>
5205 <anyAttribute namespace="##any" processContents="lax"/>
5206 </extension>

```

```

5207 <!-- an extension point ; attribute based only -->
5208 </complexContent>
5209 </complexType>
5210
5211 <!-- Binding -->
5212 <element name="binding" type="sca:Binding" abstract="true"/>
5213 <complexType name="Binding" abstract="true">
5214   <complexContent>
5215     <extension base="sca:CommonExtensionBase">
5216       <sequence>
5217         <element ref="sca:wireFormat" minOccurs="0" maxOccurs="1" />
5218         <element ref="sca:operationSelector" minOccurs="0"
5219           maxOccurs="1" />
5220         <element ref="sca:requires" minOccurs="0"
5221           maxOccurs="unbounded"/>
5222         <element ref="sca:policySetAttachment" minOccurs="0"
5223           maxOccurs="unbounded"/>
5224       </sequence>
5225       <attribute name="uri" type="anyURI" use="optional"/>
5226       <attribute name="name" type="NCName" use="optional"/>
5227       <attribute name="requires" type="sca:listOfQNames"
5228         use="optional"/>
5229       <attribute name="policySets" type="sca:listOfQNames"
5230         use="optional"/>
5231     </extension>
5232   </complexContent>
5233 </complexType>
5234
5235 <!-- Binding Type -->
5236 <element name="bindingType" type="sca:BindingType"/>
5237 <complexType name="BindingType">
5238   <complexContent>
5239     <extension base="sca:CommonExtensionBase">
5240       <sequence>
5241         <any namespace="##other" processContents="lax" minOccurs="0"
5242           maxOccurs="unbounded"/>
5243       </sequence>
5244       <attribute name="type" type="QName" use="required"/>
5245       <attribute name="alwaysProvides" type="sca:listOfQNames"
5246         use="optional"/>
5247       <attribute name="mayProvide" type="sca:listOfQNames"
5248         use="optional"/>
5249     </extension>
5250   </complexContent>
5251 </complexType>
5252
5253 <!-- WireFormat Type -->
5254 <element name="wireFormat" type="sca:WireFormatType" abstract="true"/>
5255 <complexType name="WireFormatType" abstract="true">
5256   <sequence>
5257     <any namespace="##other" processContents="lax" minOccurs="0"
5258       maxOccurs="unbounded" />
5259   </sequence>
5260   <anyAttribute namespace="##other" processContents="lax"/>
5261 </complexType>
5262
5263 <!-- OperationSelector Type -->
5264 <element name="operationSelector" type="sca:OperationSelectorType"
5265   abstract="true"/>
5266 <complexType name="OperationSelectorType" abstract="true">
5267   <sequence>
5268     <any namespace="##other" processContents="lax" minOccurs="0"
5269       maxOccurs="unbounded" />
5270   </sequence>

```



```

5271     <anyAttribute namespace="##other" processContents="lax"/>
5272 </complexType>
5273
5274 <!-- Callback -->
5275 <element name="callback" type="sca:Callback"/>
5276 <complexType name="Callback">
5277     <complexContent>
5278         <extension base="sca:CommonExtensionBase">
5279             <choice minOccurs="0" maxOccurs="unbounded">
5280                 <element ref="sca:binding"/>
5281                 <element ref="sca:requires"/>
5282                 <element ref="sca:policySetAttachment"/>
5283             </choice>
5284             <any namespace="##other" processContents="lax"/>
5285             <attribute name="requires" type="sca:listOfQNames"
5286                 use="optional"/>
5287             <attribute name="policySets" type="sca:listOfQNames"
5288                 use="optional"/>
5289         </extension>
5290     </complexContent>
5291 </complexType>
5292
5293 <!-- Component -->
5294 <complexType name="Component">
5295     <complexContent>
5296         <extension base="sca:CommonExtensionBase">
5297             <sequence>
5298                 <element ref="sca:implementation" minOccurs="0"
5299                     maxOccurs="1"/>
5300                 <choice minOccurs="0" maxOccurs="unbounded">
5301                     <element name="service" type="sca:ComponentService"/>
5302                     <element name="reference" type="sca:ComponentReference"/>
5303                     <element name="property" type="sca:PropertyValue"/>
5304                     <element ref="sca:requires"/>
5305                     <element ref="sca:policySetAttachment"/>
5306                 </choice>
5307                 <any namespace="##other" processContents="lax" minOccurs="0"
5308                     maxOccurs="unbounded"/>
5309             </sequence>
5310             <attribute name="name" type="NCName" use="required"/>
5311             <attribute name="autowire" type="boolean" use="optional"/>
5312 <attribute name="constrainingType" type="QName" use="optional"/>
5313             <attribute name="requires" type="sca:listOfQNames"
5314                 use="optional"/>
5315             <attribute name="policySets" type="sca:listOfQNames"
5316                 use="optional"/>
5317         </extension>
5318     </complexContent>
5319 </complexType>
5320
5321 <!-- Component Service -->
5322 <complexType name="ComponentService">
5323     <complexContent>
5324         <extension base="sca:Contract">
5325             </extension>
5326         </complexContent>
5327 </complexType>
5328
5329 <!-- Constraining Service -->
5330 <complexType name="ConstrainingService">
5331 <complexContent>
5332 <restriction base="sca:ComponentService">
5333 <sequence>

```



```

5334 <element ref="sca:interface" minOccurs="0" maxOccurs="1" />
5335 <element ref="sca:callback" minOccurs="0" maxOccurs="1" />
5336 <any namespace="##other" processContents="lax" minOccurs="0"
5337 maxOccurs="unbounded" />
5338 </sequence>
5339 <attribute name="name" type="NCName" use="required" />
5340 </restriction>
5341 </complexContent>
5342 </complexType>

```

```

<!-- Component Reference -->
<complexType name="ComponentReference">
  <complexContent>
    <extension base="sca:Contract">
      <attribute name="autowire" type="boolean" use="optional"/>
      <attribute name="target" type="sca:listOfAnyURIs"
        use="optional"/>
      <attribute name="wiredByImpl" type="boolean" use="optional"
        default="false"/>
      <attribute name="multiplicity" type="sca:Multiplicity"
        use="optional" default="1..1"/>
      <attribute name="nonOverridable" type="boolean" use="optional"
        default="false"/>
    </extension>
  </complexContent>
</complexType>

```

```

5362 <!-- Constraining Reference -->
5363 <complexType name="ConstrainingReference">
5364 <complexContent>
5365 <restriction base="sca:ComponentReference">
5366 <sequence>
5367 <element ref="sca:interface" minOccurs="0" maxOccurs="1" />
5368 <element ref="sca:callback" minOccurs="0" maxOccurs="1" />
5369 <any namespace="##other" processContents="lax" minOccurs="0"
5370 maxOccurs="unbounded" />
5371 </sequence>
5372 <attribute name="name" type="NCName" use="required" />
5373 <attribute name="autowire" type="boolean" use="optional"/>
5374 <attribute name="wiredByImpl" type="boolean" use="optional"
5375 default="false"/>
5376 <attribute name="multiplicity" type="sca:Multiplicity"
5377 use="optional" default="1..1"/>
5378 </restriction>
5379 </complexContent>
5380 </complexType>

```

```

<!-- Component Type Reference -->
<complexType name="ComponentTypeReference">
  <complexContent>
    <restriction base="sca:ComponentReference">
      <sequence>
        <element ref="sca:documentation" minOccurs="0"
          maxOccurs="unbounded"/>
        <element ref="sca:interface" minOccurs="0"/>
        <element ref="sca:binding" minOccurs="0"
          maxOccurs="unbounded"/>
        <element ref="sca:callback" minOccurs="0"/>

```

```

5393         <any namespace="##other" processContents="lax" element
5394 ref="sca:requires" minOccurs="0"
5395         maxOccurs="unbounded"/>
5396         <element ref="sca:policySetAttachment" minOccurs="0"
5397         maxOccurs="unbounded"/>
5398         <element ref="sca:extensions" minOccurs="0" maxOccurs="1" />
5399     </sequence>
5400     <attribute name="name" type="NCName" use="required"/>
5401     <attribute name="autowire" type="boolean" use="optional"/>
5402     <attribute name="wiredByImpl" type="boolean" use="optional"
5403         default="false"/>
5404     <attribute name="multiplicity" type="sca:Multiplicity"
5405         use="optional" default="1..1"/>
5406     <attribute name="requires" type="sca:listOfQNames"
5407         use="optional"/>
5408     <attribute name="policySets" type="sca:listOfQNames"
5409         use="optional"/>
5410     <anyAttribute namespace="##other" processContents="lax"/>
5411 </restriction>
5412 </complexContent>
5413 </complexType>
5414
5415
5416 <!-- Implementation -->
5417 <element name="implementation" type="sca:Implementation" abstract="true"/>
5418 <complexType name="Implementation" abstract="true">
5419     <complexContent>
5420         <extension base="sca:CommonExtensionBase">
5421             <choice minOccurs="0" maxOccurs="unbounded">
5422             <element ref="sca:requires"/>
5423             <element ref="sca:policySetAttachment"/>
5424             </choice>
5425             <attribute name="requires" type="sca:listOfQNames"
5426                 use="optional"/>
5427             <attribute name="policySets" type="sca:listOfQNames"
5428                 use="optional"/>
5429         </extension>
5430     </complexContent>
5431 </complexType>
5432
5433 <!-- Implementation Type -->
5434 <element name="implementationType" type="sca:ImplementationType"/>
5435 <complexType name="ImplementationType">
5436     <complexContent>
5437         <extension base="sca:CommonExtensionBase">
5438             <sequence>
5439                 <any namespace="##other" processContents="lax" minOccurs="0"
5440                     maxOccurs="unbounded"/>
5441             </sequence>
5442             <attribute name="type" type="QName" use="required"/>
5443             <attribute name="alwaysProvides" type="sca:listOfQNames"
5444                 use="optional"/>
5445             <attribute name="mayProvide" type="sca:listOfQNames"
5446                 use="optional"/>
5447         </extension>
5448     </complexContent>
5449 </complexType>
5450
5451 <!-- Wire -->
5452 <complexType name="Wire">
5453     <complexContent>
5454         <extension base="sca:CommonExtensionBase">
5455             <sequence>
5456                 <any namespace="##other" processContents="lax" minOccurs="0"

```

```

5457         maxOccurs="unbounded"/>
5458     </sequence>
5459     <attribute name="source" type="anyURI" use="required"/>
5460     <attribute name="target" type="anyURI" use="required"/>
5461     <attribute name="replace" type="boolean" use="optional"
5462         default="false"/>
5463 </extension>
5464 </complexContent>
5465 </complexType>
5466
5467 <!-- Include -->
5468 <element name="include" type="sca:Include"/>
5469 <complexType name="Include">
5470     <complexContent>
5471         <extension base="sca:CommonExtensionBase">
5472             <attribute name="name" type="QName"/>
5473         </extension>
5474     </complexContent>
5475 </complexType>
5476
5477 <!-- Constraining Type
5478 <!-- Extensions element -->
5479 <element name="constrainingType" type="sca:ConstrainingType"/>
5480 <extensions>
5481     <complexType name="ConstrainingType">
5482 <complexContent>
5483     <extension base="sca:CommonExtensionBase">
5484         <sequence>
5485             <choice minOccurs="0" maxOccurs="unbounded">
5486                 <element name="service" type="sca:ConstrainingService"/>
5487                 <element name="reference"
5488                     type="sca:ConstrainingReference"/>
5489                 <element name="property" type="sca:ConstrainingProperty"/>
5490             </choice>
5491             <any namespace="##other" processContents="lax" minOccurs="0"
5492                 maxOccurs="1" maxOccurs="unbounded"/>
5493         </sequence>
5494         <attribute name="name" type="NCName" use="required"/>
5495         <attribute name="targetNamespace" type="anyURI"/>
5496     </extension>
5497 </complexContent>
5498 </complexType>
5499 </element>
5500
5501 <!-- Intents within WSDL documents -->
5502 <attribute name="requires" type="sca:listOfQNames"/>
5503
5504 <!-- Global attribute definition for @callback to mark a WSDL port type
5505 as having a callback interface defined in terms of a second port
5506 type. -->
5507 <attribute name="callback" type="anyURI"/>
5508
5509 <!-- Value type definition for property values -->
5510 <element name="value" type="sca:ValueType"/>
5511 <complexType name="ValueType" mixed="true">
5512     <sequence>
5513         <any namespace="##any" processContents="lax" minOccurs="0"
5514             maxOccurs="unbounded"/>
5515     </sequence>
5516     <!-- mixed="true" to handle simple type -->
5517     <anyAttribute namespace="##any" processContents="lax"/>

```

```

5518 </complexType>
5519
5520 <!-- Miscellaneous simple type definitions -->
5521 <simpleType name="Multiplicity">
5522   <restriction base="string">
5523     <enumeration value="0..1"/>
5524     <enumeration value="1..1"/>
5525     <enumeration value="0..n"/>
5526     <enumeration value="1..n"/>
5527   </restriction>
5528 </simpleType>
5529
5530 <simpleType name="OverrideOptions">
5531   <restriction base="string">
5532     <enumeration value="no"/>
5533     <enumeration value="may"/>
5534     <enumeration value="must"/>
5535   </restriction>
5536 </simpleType>
5537
5538 <simpleType name="listOfQNames">
5539   <list itemType="QName"/>
5540 </simpleType>
5541
5542 <simpleType name="listOfAnyURIs">
5543   <list itemType="anyURI"/>
5544 </simpleType>
5545
5546 <simpleType name="CreateResource">
5547   <restriction base="string">
5548     <enumeration value="always" />
5549     <enumeration value="never" />
5550     <enumeration value="ifnotexist" />
5551   </restriction>
5552 </simpleType>
5553 </schema>
5554

```

5555 A.3 sca-binding-sca.xsd

```

5556
5557 <?xml version="1.0" encoding="UTF-8"?>
5558 <!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved.
5559   OASIS trademark, IPR and other policies apply. -->
5560 <schema xmlns="http://www.w3.org/2001/XMLSchema"
5561   targetNamespace="http://docs.oasis-
5562   open.org/ns/opencsa/sca/200903200912"
5563   xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5564   elementFormDefault="qualified">
5565
5566   <include schemaLocation="sca-core-1.1-ed03cd05.xsd"/>
5567
5568   <!-- SCA Binding -->
5569   <element name="binding.sca" type="sca:SCABinding"
5570     substitutionGroup="sca:binding"/>
5571   <complexType name="SCABinding">
5572     <complexContent>
5573       <extension base="sca:Binding"/>
5574     </complexContent>
5575   </complexType>
5576
5577 </schema>

```

5578

5579 A.4 sca-interface-java.xsd

5580 Is described in the [SCA Java Common Annotations and APIs specification](#) [SCA-Common-Java].

5581

5582 A.5 sca-interface-wsdl.xsd

5583

```
5584 <?xml version="1.0" encoding="UTF-8"?>
5585 <!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved.
5586 OASIS trademark, IPR and other policies apply. -->
5587 <schema xmlns="http://www.w3.org/2001/XMLSchema"
5588 targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5589 xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5590 elementFormDefault="qualified">
5591
5592 <include schemaLocation="sca-core-1.1-ed03cd05.xsd"/>
5593
5594 <!-- WSDL Interface -->
5595 <element name="interface.wsdl" type="sca:WSDLPortType"
5596 substitutionGroup="sca:interface"/>
5597 <complexType name="WSDLPortType">
5598 <complexContent>
5599 <extension base="sca:Interface">
5600 <sequence>
5601 <any namespace="##other" processContents="lax" minOccurs="0"
5602 maxOccurs="unbounded"/>
5603 </sequence>
5604 <attribute name="interface" type="anyURI" use="required"/>
5605 <attribute name="callbackInterface" type="anyURI"
5606 use="optional"/>
5607 <!-- <anyAttribute namespace="##any" processContents="lax"/>
5608 </extension>
5609 </complexContent>
5610 </complexType>
5611
5612 </schema>
```

5613

5614 A.6 sca-implementation-java.xsd

5615 Is described in the [Java Component Implementation specification](#) [SCA-Java]

5616 A.7 sca-implementation-composite.xsd

5617

```
5618 <?xml version="1.0" encoding="UTF-8"?>
5619 <!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved.
5620 OASIS trademark, IPR and other policies apply. -->
5621 <schema xmlns="http://www.w3.org/2001/XMLSchema"
5622 xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5623 targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5624 elementFormDefault="qualified">
5625
5626 <include schemaLocation="sca-core-1.1-ed03cd05.xsd"/>
5627
```

```

5628 <!-- Composite Implementation -->
5629 <element name="implementation.composite" type="sca:SCAImplementation"
5630 substitutionGroup="sca:implementation"/>
5631 <complexType name="SCAImplementation">
5632 <complexContent>
5633 <extension base="sca:Implementation">
5634 <sequence>
5635 <any namespace="##other" processContents="lax" minOccurs="0"
5636 maxOccurs="unbounded"/>
5637 </sequence>
5638 <attribute name="name" type="QName" use="required"/>
5639 </extension>
5640 </complexContent>
5641 </complexType>
5642
5643 </schema>

```

5645 A.8 sca-binding-webservice.xsd

5646 Is described in the SCA Web Services Binding specification [9]SCA-WSBINDING]

5647 A.9 sca-binding-jms.xsd

5648 Is described in the SCA JMS Binding specification [44]SCA-JMSBINDING]

5649 A.10 sca-policy.xsd

5650 Is described in the SCA Policy Framework specification [40]SCA-POLICY]

5652 A.11 sca-contribution.xsd

```

5654 <?xml version="1.0" encoding="UTF-8"?>
5655 <!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved.
5656 OASIS trademark, IPR and other policies apply. -->
5657 <schema xmlns="http://www.w3.org/2001/XMLSchema"
5658 xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5659 targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5660 elementFormDefault="qualified">
5661
5662 <include schemaLocation="sca-core-1.1-ed03cd05.xsd"/>
5663
5664 <!-- Contribution -->
5665 <element name="contribution" type="sca:ContributionType"/>
5666 <complexType name="ContributionType">
5667 <complexContent>
5668 <extension base="sca:CommonExtensionBase">
5669 <sequence>
5670 <element name="deployable" type="sca:DeployableType"
5671 minOccurs="0" maxOccurs="unbounded"/>
5672 <element ref="sca:importBase" minOccurs="0"
5673 maxOccurs="unbounded"/>
5674 <element ref="sca:exportBase" minOccurs="0"
5675 maxOccurs="unbounded"/>
5676 <any namespace="##other" processContents="lax" minOccurs="0"
5677 maxOccurs="unbounded"/>
5678 </sequence>
5679 </extension>

```

```

5680     </complexContent>
5681 </complexType>
5682
5683 <!-- Deployable -->
5684 <complexType name="DeployableType">
5685   <complexContent>
5686     <extension base="sca:CommonExtensionBase">
5687       <sequence>
5688         <any namespace="##other" processContents="lax" minOccurs="0"
5689           maxOccurs="unbounded" />
5690       </sequence>
5691       <attribute name="composite" type="QName" use="required" />
5692     </extension>
5693   </complexContent>
5694 </complexType>
5695
5696 <!-- Import -->
5697 <element name="importBase" type="sca:Import" abstract="true" />
5698 <complexType name="Import" abstract="true">
5699   <complexContent>
5700     <extension base="sca:CommonExtensionBase">
5701       <sequence>
5702         <any namespace="##other" processContents="lax" minOccurs="0"
5703           maxOccurs="unbounded" />
5704       </sequence>
5705     </extension>
5706   </complexContent>
5707 </complexType>
5708
5709 <element name="import" type="sca:ImportType"
5710   substitutionGroup="sca:importBase" />
5711 <complexType name="ImportType">
5712   <complexContent>
5713     <extension base="sca:Import">
5714       <attribute name="namespace" type="string" use="required" />
5715       <attribute name="location" type="anyURI" use="optional" />
5716     </extension>
5717   </complexContent>
5718 </complexType>
5719
5720 <!-- Export -->
5721 <element name="exportBase" type="sca:Export" abstract="true" />
5722 <complexType name="Export" abstract="true">
5723   <complexContent>
5724     <extension base="sca:CommonExtensionBase">
5725       <sequence>
5726         <any namespace="##other" processContents="lax" minOccurs="0"
5727           maxOccurs="unbounded" />
5728       </sequence>
5729     </extension>
5730   </complexContent>
5731 </complexType>
5732
5733 <element name="export" type="sca:ExportType"
5734   substitutionGroup="sca:exportBase" />
5735 <complexType name="ExportType">
5736   <complexContent>
5737     <extension base="sca:Export">
5738       <attribute name="namespace" type="string" use="required" />
5739     </extension>
5740   </complexContent>
5741 </complexType>
5742

```


5743 </schema>

5744

5745 A.12 sca-definitions.xsd

5746

```
5747 <?xml version="1.0" encoding="UTF-8"?>
5748 <!-- Copyright(C) OASIS(R) 2005,2009. All Rights Reserved.
5749 OASIS trademark, IPR and other policies apply. -->
5750 <schema xmlns="http://www.w3.org/2001/XMLSchema"
5751 targetNamespace="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5752 xmlns:sca="http://docs.oasis-open.org/ns/opencsa/sca/200903200912"
5753 elementFormDefault="qualified">
5754
5755 <include schemaLocation="sca-core-1.1-ed03cd05.xsd"/>
5756 <include schemaLocation="sca-policy-1.1-ed02cd03.xsd"/>
5757
5758 <!-- Definitions -->
5759 <element name="definitions" type="sca:tDefinitions"/>
5760 <complexType name="tDefinitions">
5761 <complexContent>
5762 <extension base="sca:CommonExtensionBase">
5763 <choice minOccurs="0" maxOccurs="unbounded">
5764 <element ref="sca:intent"/>
5765 <element ref="sca:policySet"/>
```

5766 <element ref="sca:binding"/>

```
5767 <del><element ref="sca:bindingType"/></del>
5768 <del><element ref="sca:implementationType"/></del>
5769 <del><any namespace="##other" processContents="lax"
5770 minOccurs="0" maxOccurs="unbounded"/></del>
5771 <del></choice></del>
5772 <del><attribute name="targetNamespace" type="anyURI" use="required"/></del>
5773 <del></extension></del>
5774 <del></complexContent></del>
5775 <del></complexType></del>
5776
5777 </schema>
```

5778

B. SCA Concepts

B.1 Binding

Bindings are used by services and references. References use bindings to describe the access mechanism used to call the service to which they are wired. Services use bindings to describe the access mechanism(s) that clients use to call the service.

SCA supports multiple different types of bindings. Examples include **SCA service**, **Web service**, **stateless session EJB**, **database stored procedure**, **EIS service**. SCA provides an extensibility mechanism by which an SCA runtime can add support for additional binding types.

B.2 Component

SCA components are configured instances of **SCA implementations**, which provide and consume services. SCA allows many different implementation technologies such as Java, BPEL, C++. SCA defines an **extensibility mechanism** that allows you to introduce new implementation types. The current specification does not mandate the implementation technologies to be supported by an SCA runtime, vendors can choose to support the ones that are important for them. A single SCA implementation can be used by multiple Components, each with a different configuration.

The Component has a reference to an implementation of which it is an instance, a set of property values, and a set of service reference values. Property values define the values of the properties of the component as defined by the component's implementation. Reference values define the services that resolve the references of the component as defined by its implementation. These values can either be a particular service of a particular component, or a reference of the containing composite.

B.3 Service

SCA services are used to declare the externally accessible services of an **implementation**. For a composite, a service is typically provided by a service of a component within the composite, or by a reference defined by the composite. The latter case allows the republication of a service with a new address and/or new bindings. The service can be thought of as a point at which messages from external clients enter a composite or implementation.

A service represents an addressable set of operations of an implementation that are designed to be exposed for use by other implementations or exposed publicly for use elsewhere (e.g. public Web services for use by other organizations). The operations provided by a service are specified by an Interface, as are the operations needed by the service client (if there is one). An implementation can contain multiple services, when it is possible to address the services of the implementation separately.

A service can be provided **as SCA remote services, as Web services, as stateless session EJB's, as EIS services, and so on**. Services use **bindings** to describe the way in which they are published. SCA provides an **extensibility mechanism** that makes it possible to introduce new binding types for new types of services.

B.3.1 Remotable Service

A Remotable Service is a service that is designed to be published remotely in a loosely-coupled SOA architecture. For example, SCA services of SCA implementations can define implementations of industry-standard web services. Remotable services use pass-by-value semantics for parameters and returned results.

Interfaces can be identified as remotable through the <interface /> XML, but are typically specified as remotable using a component implementation technology specific mechanism, such as Java annotations. See the relevant SCA Implementation Specification for more information. As an example, to define a

5823 Remotable Service, a Component implemented in Java would have a Java Interface with the
5824 @Remotable annotation

5825 B.3.2 Local Service

5826 Local services are services that are designed to be only used “locally” by other implementations that are
5827 deployed concurrently in a tightly-coupled architecture within the same operating system process.

5828 Local services can rely on by-reference calling conventions, or can assume a very fine-grained interaction
5829 style that is incompatible with remote distribution. They can also use technology-specific data-types.

5830 How a Service is identified as local is dependant on the Component implementation technology used.

5831 See the relevant SCA Implementation Specification for more information. As an example, to define a
5832 Local Service, a Component implemented in Java would define a Java Interface that does not have the
5833 @Remotable annotation.

5834

5835 B.4 Reference

5836 **SCA references** represent a dependency that an implementation has on a service that is provided by
5837 some other implementation, where the service to be used is specified through configuration. In other
5838 words, a reference is a service that an implementation can call during the execution of its business
5839 function. References are typed by an interface.

5840 For composites, composite references can be accessed by components within the composite like any
5841 service provided by a component within the composite. Composite references can be used as the targets
5842 of wires from component references when configuring Components.

5843 A composite reference can be used to access a service such as: an SCA service provided by another
5844 SCA composite, a Web service, a stateless session EJB, a database stored procedure or an EIS service,
5845 and so on. References use **bindings** to describe the access method used to their services. SCA provides
5846 an **extensibility mechanism** that allows the introduction of new binding types to references.

5847

5848 B.5 Implementation

5849 An implementation is concept that is used to describe a piece of software technology such as a Java
5850 class, BPEL process, XSLT transform, or C++ class that is used to implement one or more services in a
5851 service-oriented application. An SCA composite is also an implementation.

5852 Implementations define points of variability including properties that can be set and settable references to
5853 other services. The points of variability are configured by a component that uses the implementation. The
5854 specification refers to the configurable aspects of an implementation as its **componentType**.

5855 B.6 Interface

5856 Interfaces define one or more business functions. These business functions are provided by Services
5857 and are used by components through References. Services are defined by the Interface they implement.
5858 SCA currently supports a number of interface type systems, for example:

- 5859 • Java interfaces
- 5860 • WSDL portTypes
- 5861 • C, C++ header files

5862

5863 SCA also provides an extensibility mechanism by which an SCA runtime can add support for additional
5864 interface type systems.

5865 Interfaces can be **bi-directional**. A bi-directional service has service operations which are provided by
5866 each end of a service communication – this could be the case where a particular service demands a

5867 “callback” interface on the client, which it calls during the process of handing service requests from the
5868 client.

5869

5870 B.7 Composite

5871 An SCA composite is the basic unit of composition within an SCA Domain. An **SCA Composite** is an
5872 assembly of Components, Services, References, and the Wires that interconnect them. Composites can
5873 be used to contribute elements to an **SCA Domain**.

5874 A **composite** has the following characteristics:

- 5875 • It can be used as a component implementation. When used in this way, it defines a boundary for
5876 Component visibility. Components cannot be directly referenced from outside of the composite in
5877 which they are declared.
- 5878 • It can be used to define a unit of deployment. Composites are used to contribute business logic
5879 artifacts to an SCA Domain.

5880

5881 B.8 Composite inclusion

5882 One composite can be used to provide part of the definition of another composite, through the process of
5883 inclusion. This is intended to make team development of large composites easier. Included composites
5884 are merged together into the using composite at deployment time to form a single logical composite.

5885 Composites are included into other composites through `<include.../>` elements in the using composite.
5886 The SCA Domain uses composites in a similar way, through the deployment of composite files to a
5887 specific location.

5888

5889 B.9 Property

5890 **Properties** allow for the configuration of an implementation with externally set data values. The data
5891 value is provided through a Component, possibly sourced from the property of a containing composite.

5892 Each Property is defined by the implementation. Properties can be defined directly through the
5893 implementation language or through annotations of implementations, where the implementation language
5894 permits, or through a componentType file. A Property can be either a simple data type or a complex data
5895 type. For complex data types, XML schema is the preferred technology for defining the data types.

5896

5897 B.10 Domain

5898 An SCA Domain represents a set of Services providing an area of Business functionality that is controlled
5899 by a single organization. As an example, for the accounts department in a business, the SCA Domain
5900 might cover all finance-related functions, and it might contain a series of composites dealing with specific
5901 areas of accounting, with one for Customer accounts, another dealing with Accounts Payable.

5902 A Domain specifies the instantiation, configuration and connection of a set of components, provided via
5903 one or more composite files. A Domain also contains Wires that connect together the Components. A
5904 Domain does not contain promoted Services or promoted References, since promotion has no meaning
5905 at the Domain level.

5906

5907 B.11 Wire

5908 **SCA wires** connect **service references** to **services**.

5909 Valid wire sources are component references. Valid wire targets are component services.

5910 When using included composites, the sources and targets of the wires don't have to be declared in the
5911 same composite as the composite that contains the wire. The sources and targets can be defined by
5912 other included composites. Targets can also be external to the SCA Domain.
5913 |

5914

C. Conformance Items

5915

This section contains a list of conformance items for the SCA Assembly specification.

5916

C.1 Mandatory Items

Conformance ID	Description
[ASM13001]	An SCA runtime MUST reject a composite file that does not conform to the sca-core.xsd, sca-interface-wsdl.xsd, sca-implementation-composite.xsd and sca-binding-sca.xsd schema.
[ASM13002]	An SCA runtime MUST reject a contribution file that does not conform to the sca-contribution.xsd schema.
[ASM13003]	An SCA runtime MUST reject a definitions file that does not conform to the sca-definitions.xsd schema.
[ASM40001]	The extension of a componentType side file name MUST be .componentType.
[ASM40002]	If present, the @constrainingType attribute of a <componentType/> element MUST reference a <constrainingType/> element in the Domain through its QName.
[ASM40003]	The @name attribute of a <service/> child element of a <componentType/> MUST be unique amongst the service elements of that <componentType/>.
[ASM40004]	The @name attribute of a <reference/> child element of a <componentType/> MUST be unique amongst the reference elements of that <componentType/>.
[ASM40005]	The @name attribute of a <property/> child element of a <componentType/> MUST be unique amongst the property elements of that <componentType/>.
[ASM40006]	If @wiredByImpl is set to "true", then any reference targets configured for this reference MUST be ignored by the runtime.
[ASM40007]	The value of the property @type attribute MUST be the QName of an XML schema type.
[ASM40008]	The value of the property @element attribute MUST be the QName of an XSD global element.
[ASM40009]	The SCA runtime MUST ensure that any implementation default property value is replaced by a value for that property explicitly set by a component using that implementation.
[ASM40010]	A single property element MUST NOT contain both a @type attribute and an @element attribute.
[ASM40011]	When the componentType has @mustSupply="true" for a property element, a component using the implementation MUST supply a value for the property since the implementation has no default value for the property.

[ASM50001]	The @name attribute of a <component/> child element of a <composite/> MUST be unique amongst the component elements of that <composite/>
[ASM50002]	The @name attribute of a service element of a <component/> MUST be unique amongst the service elements of that <component/>
[ASM50003]	The @name attribute of a service element of a <component/> MUST match the @name attribute of a service element of the componentType of the <implementation/> child element of the component.
[ASM50004] [ASM50004] [ASM50004]	If a <service/> element has an interface subelement specified is declared for a component service, the interface MUST provide a compatible subset of the interface declared on for the equivalent service in the componentType of the implementation
[ASM50005] [ASM50005] [ASM50005]	If no binding elements are specified for the service, then the bindings specified for the equivalent service in the componentType of the implementation MUST be used, but if the componentType also has no bindings specified, then <binding.sca/> MUST be used as the binding. If binding elements are specified for the service, then those bindings MUST be used and they override any bindings specified for the equivalent service in the componentType of the implementation.
[ASM50006] [ASM50006] [ASM50006]	If the callback element is present and contains one or more binding child elements, then those bindings MUST be used for the callback.
[ASM50007]	The @name attribute of a service element of a <component/> MUST be unique amongst the service elements of that <component/>
[ASM50008]	The @name attribute of a reference element of a <component/> MUST match the @name attribute of a reference element of the componentType of the <implementation/> child element of the component.
[ASM50009]	The value of multiplicity for a component reference MUST only be equal or further restrict any value for the multiplicity of the reference with the same name in the componentType of the implementation, where further restriction means 0..n to 0..1 or 1..n to 1..1.
[ASM50010]	If @wiredByImpl="true" is set for a reference, then the reference MUST NOT be wired statically within a composite, but left unwired.
[ASM50011] [ASM50011] [ASM50011]	If an interface is declared for a component reference, the interface MUST provide a compatible superset of the interface declared for the equivalent reference in the componentType of the implementation, i.e. provide the same operations or a superset of the operations defined by the implementation for the reference.
[ASM50012] [ASM50012] [ASM50012]	If no binding elements are specified for the reference, then the bindings specified for the equivalent reference in the

	componentType of the implementation MUST be used. If binding elements are specified for the reference, then those bindings MUST be used and they override any bindings specified for the equivalent reference in the componentType of the implementation.
[ASM50013]	If @wiredByImpl="true", other methods of specifying the target service MUST NOT be used.
[ASM50014]	If @autowire="true", the autowire procedure MUST only be used if no target is identified by any of the other ways listed above. It is not an error if @autowire="true" and a target is also defined through some other means, however in this case the autowire procedure MUST NOT be used.
[ASM50015]	If a binding element has a value specified for a target service using its @uri attribute, the binding element MUST NOT identify target services using binding specific attributes or elements.
[ASM50016]	It is possible that a particular binding type MAY require that uses more than a simple URI for the address of a target service uses more than a simple URI. In cases where a reference element has a binding subelement of such a type that uses more than simple URI , the @uri attribute of the binding element MUST NOT be used to identify the target service - instead, in this case binding specific attributes and/or child elements MUST be used.
[ASM50018]	A reference with multiplicity 0..1 or 0..n MAY have no target service defined.
[ASM50019]	A reference with multiplicity 0..1 or 1..1 MUST NOT have more than one target service defined.
[ASM50020]	A reference with multiplicity 1..1 or 1..n MUST have at least one target service defined.
[ASM50021]	A reference with multiplicity 0..n or 1..n MAY have one or more target services defined.
[ASM50022]	Where it is detected that the rules for the number of target services for a reference have been violated, either at deployment or at execution time, an SCA Runtime MUST raise an error no later than when the reference is invoked by the component implementation.
[ASM50025]	Where a component reference is promoted by a composite reference, the promotion MUST be treated from a multiplicity perspective as providing 0 or more target services for the component reference, depending upon the further configuration of the composite reference. These target services are in addition to any target services identified on the component reference itself, subject to the rules relating to multiplicity.
[ASM50026]	If a reference has a value specified for one or more target services in its @target attribute, there MUST NOT be any child <binding/> elements declared for that reference.

[ASM50027]	If the @value attribute of a component property element is declared, the type of the property MUST be an XML Schema simple type and the @value attribute MUST contain a single value of that type.
[ASM50028]	If the value subelement of a component property is specified, the type of the property MUST be an XML Schema simple type or an XML schema complex type.
[ASM50029]	If a component property value is declared using a child element of the <property/> element, the type of the property MUST be an XML Schema global element and the declared child element MUST be an instance of that global element.
[ASM50030]	A <component/> element MUST NOT contain two <property/> subelements with the same value of the @name attribute.
[ASM50031]	The @name attribute of a property element of a <component/> MUST be unique amongst the property elements of that <component/>.
[ASM50032]	If a property is single-valued, the <value/> subelement MUST NOT occur more than once.
[ASM50033]	A property <value/> subelement MUST NOT be used when the @value attribute is used to specify the value for that property.
[ASM50034]	If any <wire/> element with its @replace attribute set to "true" has a particular reference specified in its @source attribute, the value of the @target attribute for that reference MUST be ignored and MUST NOT be used to define target services for that reference.
[ASM50035]	A single property element MUST NOT contain both a @type attribute and an @element attribute.
[ASM50036]	The property type specified for the property element of a component MUST be compatible with the type of the property with the same @name declared in the component type of the implementation used by the component. If no type is declared in the component property element, the type of the property declared in the componentType of the implementation MUST be used.
[ASM50037]	The @name attribute of a property element of a <component/> MUST match the @name attribute of a property element of the componentType of the <implementation/> child element of the component.
[ASM50038]	In these cases where the types of two property elements are matched, the types declared for the two <property/> elements MUST be compatible
[ASM50039]	A reference with multiplicity 0..1 MUST have no more than one target service defined.
[ASM50040]	A reference with multiplicity 1..1 MUST have exactly one target service defined.
[ASM50041]	A reference with multiplicity 1..n MUST have at least one target service defined.

[ASM50042]	If a component reference has @multiplicity 0..1 or 1..1 and @nonOverridable==true, then the component reference MUST NOT be promoted by any composite reference.
[ASM50043][ASM50043]	The default value of the @autowire attribute MUST be the value of the @autowire attribute on the component containing the reference, if present, or else the value of the @autowire attribute of the composite containing the component, if present, and if neither is present, then it is "false".
[ASM50044]	When a property has multiple values set, all the values MUST be contained within a single property element.
[ASM60001]	A composite @name attribute value MUST be unique within the namespace of the composite.
[ASM60002]	@local="true" for a composite means that all the components within the composite MUST run in the same operating system process.
[ASM60003]	The name of a composite <service/> element MUST be unique across all the composite services in the composite.
[ASM60004]	A composite <service/> element's @promote attribute MUST identify one of the component services within that composite.
[ASM60005] [ASM60005] [ASM60005]	If a composite service interface is specified it MUST be the same or a compatible subset of the interface provided by the promoted component service, i.e. provide a subset of the operations defined by the component service.
[ASM60006]	The name of a composite <reference/> element MUST be unique across all the composite references in the composite.
[ASM60007]	Each of the URIs declared by a composite reference's @promote attribute MUST identify a component reference within the composite.
[ASM60008]	the interfaces of the component references promoted by a composite reference MUST be the same, or if the composite reference itself declares an interface then all each of the component reference interfaces MUST be a compatible with the composite reference interface. Compatible means that the component reference interface is the same or is a strict subset of the composite reference interface.
[ASM60009]	the intents declared on a composite reference and on the component references which it promotes MUST NOT be mutually exclusive.
[ASM60010]	If any intents in the set which apply to a composite reference are mutually exclusive then the SCA runtime MUST raise an error.
[ASM60011]	The value specified for the @multiplicity attribute of a composite reference MUST be compatible with the multiplicity specified on each of the promoted component references, i.e. the multiplicity has to be equal to or further restrict. So multiplicity 0..1 can be used where the multiplicity of each of the component references that it promotes, with the exception that the multiplicity of the promoted component reference has multiplicity 0..n, multiplicity

	<p>1..1 can be used where composite reference does not have to require a target if there is already a target on the promoted component reference has multiplicity 0..n or 1..n and multiplicity 1..n can be used where the promoted component reference has multiplicity 0..n. However, This means that a component reference with multiplicity 1..1 and a target can be promoted by a composite reference of with multiplicity 0..n or 1..n cannot be used to promote 1, and a component reference of with multiplicity 1..n and one or more targets can be promoted by a composite reference with multiplicity 0..n or 0..1. 1 respectively.</p>
[ASM60012] [ASM60012] [ASM60012]	<p>If a composite reference has an interface specified, it MUST provide an interface which is the same or which is a compatible superset of the interface(s) declared by the promoted component reference(s), i.e. provide a superset of the operations in the interface defined by the component for the reference(s).</p>
[ASM60013] [ASM60013]	<p>If no interface is declared on a composite reference, the interface from one of its promoted component references is used, which MUST be used for the same as or a compatible superset of the interface(s) declared by the promoted component reference(s) type associated with the composite.</p>
[ASM60014]	<p>The @name attribute of a composite property MUST be unique amongst the properties of the same composite.</p>
[ASM60015] [ASM60022] [ASM60022]	<p>the source interface and the target interface of a wire MUST either both be remotable or else both be local For each component reference for which autowire is enabled, the SCA runtime MUST search within the composite for target services which have an interface that is a compatible superset of the interface of the reference.</p>
[ASM60016] [ASM60024]	<p>the operations on the target interface of a wire MUST be the same as or be a superset of the operations in the interface specified on the source The intents, and policies applied to the service MUST be compatible with those on the reference when using autowire to wire a reference – so that wiring the reference to the service will not cause an error due to policy mismatch</p>
[ASM60017]	<p>compatibility between the source interface and the target interface for a wire for the individual operations is defined as compatibility of the signature, that is operation name, input types, and output types MUST be the same.</p>
[ASM60018]	<p>the order of the input and output types for operations in the source interface and the target interface of a wire also MUST be the same.</p>
[ASM60019]	<p>the set of Faults and Exceptions expected by each operation in the source interface MUST be the same or be a superset of those specified by the target interface.</p>
[ASM60020]	<p>If either the source interface of a wire or the target interface of a wire declares a callback interface then both the source interface and the target interface MUST declare a callback interface and the callback interface declared on the target MUST be a compatible superset of the callback interface declared on the source.</p>

[ASM60021]	For the case of an un-wired reference with multiplicity 1..1 or 1..n the deployment process provided by an SCA runtime SHOULD issue a warning.
[ASM60022] [ASM60022] [ASM60022]	For each component reference for which autowire is enabled, the SCA runtime MUST search within the composite for target services which are compatible with the reference.
[ASM60023]	the target service interface MUST be a compatible superset of the reference interface when using autowire to wire a reference (as defined in the section on Wires)
[ASM60024]	the intents, and policies applied to the service MUST be compatible with those on the reference when using autowire to wire a reference — so that wiring the reference to the service will not cause an error due to policy mismatch
[ASM60025]	for an autowire reference with multiplicity 0..1 or 1..1, the SCA runtime MUST wire the reference to one of the set of valid target services chosen from the set in a runtime-dependent fashion
[ASM60026]	for an autowire reference with multiplicity 0..n or 1..n, the reference MUST be wired to all of the set of valid target services
[ASM60027]	for an autowire reference with multiplicity 0..1 or 0..n, if the SCA runtime finds no valid target service, there is no problem – no services are wired and the SCA runtime MUST NOT raise an error
[ASM60028]	for an autowire reference with multiplicity 1..1 or 1..n, if the SCA runtime finds no valid target services an error MUST be raised by the SCA runtime since the reference is intended to be wired
[ASM60030]	The @name attribute of an <implementation.composite/> element MUST contain the QName of a composite in the SCA Domain.
[ASM60031]	The SCA runtime MUST raise an error if the composite resulting from the inclusion of one composite into another is invalid.
[ASM60032]	For a composite used as a component implementation, each composite service offered by the composite MUST promote a component service of a component that is within the composite.
[ASM60033]	For a composite used as a component implementation, every component reference of components within the composite with a multiplicity of 1..1 or 1..n MUST be wired or promoted.
[ASM60034]	For a composite used as a component implementation, all properties of components within the composite, where the underlying component implementation specifies "mustSupply=true" for the property, MUST either specify a value for the property or source the value from a composite property.
[ASM60035]	All the component references promoted by a single composite reference MUST have the same value for @wiredByImpl.
[ASM60036]	If the @wiredByImpl attribute is not specified on the composite reference, the default value is "true" if all of the promoted component references have a wiredByImpl value of "true", and the default value is "false" if all the promoted component references have a wiredByImpl value of "false". If the

	@wiredByImpl attribute is specified, its value MUST be "true" if all of the promoted component references have a wiredByImpl value of "true", and its value MUST be "false" if all the promoted component references have a wiredByImpl value of "false".
[ASM60037]	<include/> processing MUST take place before the processing of the @promote attribute of a composite reference is performed.
[ASM60038]	<include/> processing MUST take place before the processing of the @promote attribute of a composite service is performed.
[ASM60039]	<include/> processing MUST take place before the @source and @target attributes of a wire are resolved.
[ASM60040]	A single property element MUST NOT contain both a @type attribute and an @element attribute.
[ASM60041]	If the included composite has the value <i>true</i> for the attribute @local then the including composite MUST have the same value for the @local attribute, else it is an error.
[ASM60042]	The @name attribute of an include element MUST be the QName of a composite in the SCA Domain.
[ASM70004][ASM60043]	The constrainingType specifies the services, references and properties that MUST be provided by the implementation of the component to which the constrainingType is attached. The interface declared by the target of a wire MUST be a compatible superset of the interface declared by the source of the wire.
[ASM70002][ASM60045][ASM60045]	If the configuration of the component or its implementation does not conform to the constrainingType specified on the component element, the SCA runtime MUST raise an error. An SCA runtime MUST introspect the componentType of a Composite used as a Component Implementation following the rules defined in the section "Component Type of a Composite used as a Component Implementation"
[ASM70003][ASM60046]	The @name attribute of the constraining type MUST be unique in the SCA Domain. If <service-name> is present, the component service with @name corresponding to <service-name> MUST be used for the wire.
[ASM70004][ASM60047]	When an implementation is constrained by a constrainingType its component type MUST contain all the services, references and properties specified in the constrainingType. If there is no component service with @name corresponding to <service-name>, the SCA runtime MUST raise an error.
[ASM70005][ASM60048]	An implementation MAY contain additional services, additional references with @multiplicity=0..1 or @multiplicity=0..n and additional properties with @mustSupply=false beyond those declared in the constraining type, but MUST NOT contain additional references with @multiplicity=1..1 or @multiplicity=1..n or additional properties with @mustSupply=true. If <service-name> is not present, the target component MUST have one and only one service with an interface that is a compatible superset of the wire source's interface and satisfies the policy requirements of the wire source, and the SCA runtime MUST use this service

	for the wire.
[ASM70006] [ASM70006] [ASM70006] [ASM60049]	Additional services, references and properties provided by the implementation which are not declared in the constrainingType associated with a component MUST NOT be configured in any way by the containing composite. If <binding-name> is present, the <binding/> subelement of the target service with @name corresponding to <binding-name> MUST be used for the wire.
[ASM60050]	If there is no <binding/> subelement of the target service with @name corresponding to <binding-name>, the SCA runtime MUST raise an error.
[ASM60051]	If <binding-name> is not present and the target service has multiple <binding/> subelements, the SCA runtime MUST choose one and only one of the <binding/> elements which satisfies the mutual policy requirements of the reference and the service, and the SCA runtime MUST use this binding for the wire.
[ASM80001]	The interface.wsdl @interface attribute MUST reference a portType of a WSDL 1.1 document.
[ASM80002]	Remotable service Interfaces MUST NOT make use of method or operation overloading .
[ASM80003]	If a remotable service is called locally or remotely, the SCA container MUST ensure sure that no modification of input messages by the service or post-invocation modifications to return messages are seen by the caller.
[ASM80004]	If a reference is defined using a bidirectional interface element, the client component implementation using the reference calls the referenced service using the interface. The client MUST provide an implementation of the callback interface.
[ASM80005]	Either both interfaces of a bidirectional service MUST be remotable, or both MUST be local. A bidirectional service MUST NOT mix local and remote services.
[ASM80008]	Any service or reference that uses an interface marked with intents MUST implicitly add those intents to its own @requires list.
[ASM80009]	In a bidirectional interface, the service interface can have more than one operation defined, and the callback interface can also have more than one operation defined. SCA runtimes MUST allow an invocation of any operation on the service interface to be followed by zero, one or many invocations of any of the operations on the callback interface.
[ASM80010]	Whenever an interface document declaring a callback interface is used in the declaration of an <interface/> element in SCA, it MUST be treated as being bidirectional with the declared callback interface.
[ASM80011]	If an <interface/> element references an interface document which declares a callback interface and also itself contains a declaration of a callback interface, the two callback interfaces MUST be compatible.
[ASM80012][ASM80016]	Where a component uses an implementation and the component

	configuration explicitly declares an interface for a service or a reference, if the matching service or reference declaration in the component type declares an interface which has a callback interface, then the component interface declaration MUST also declare a compatible interface with a compatible callback interface. The interface.wSDL @callbackInterface attribute, if present, MUST reference a portType of a WSDL 1.1 document.
[ASM80013]	If the service or reference declaration in the component type declares an interface without a callback interface, then the component configuration for the corresponding service or reference MUST NOT declare an interface with a callback interface.
[ASM80014]	Where a composite declares an interface for a composite service or a composite reference, if the promoted service or promoted reference has an interface which has a callback interface, then the interface declaration for the composite service or the composite reference MUST also declare a compatible interface with a compatible callback interface.
[ASM80015]	If the promoted service or promoted reference has an interface without a callback interface, then the interface declaration for the composite service or composite reference MUST NOT declare a callback interface.
[ASM80016]	The interface.wSDL @callbackInterface attribute, if present, MUST reference a portType of a WSDL 1.1 document.
[ASM80017]	WSDL interfaces are always remotable and therefore an <interface.wSDL/> element MUST NOT contain remotable="false".
[ASM90001]	For a binding of a reference the @uri attribute defines the target URI of the reference. This MUST be either the componentName/serviceName/bindingName for a wire to an endpoint within the SCA Domain, or the accessible address of some service endpoint either inside or outside the SCA Domain (where the addressing scheme is defined by the type of the binding).
[ASM90002]	When a service or reference has multiple bindings, only one binding can have the default @name value; all others non-callback bindings of the service or reference MUST have a @name value specified that is unique within names, and all callback bindings of the service or reference MUST have unique names.
[ASM90003]	If a reference has any bindings, they MUST be resolved, which means that each binding MUST include a value for the @uri attribute or MUST otherwise specify an endpoint. The reference MUST NOT be wired using other SCA mechanisms.
[ASM90004] [ASM90004] [ASM90004]	a To wire to a specific binding of a target MAY be specified with a service the syntax of "componentName/serviceName/bindingName-". MUST be used.
[ASM90005]	For a binding.sca of a component service, the @uri attribute MUST NOT be present.
[ASM10001]	all of the QNames for the definitions contained in definitions.xml

	files MUST be unique within the Domain.
[ASM10002]	An SCA runtime MUST make available to the Domain all the artifacts contained within the definitions.xml files in the Domain.
[ASM10003]	An SCA runtime MUST reject a definitions.xml file that does not conform to the sca-definitions.xsd schema.
[ASM12001]	For any contribution packaging it MUST be possible to present the artifacts of the packaging to SCA as a hierarchy of resources based off of a single root
[ASM12002]	Within any contribution packaging A directory resource SHOULD exist at the root of the hierarchy named META-INF
[ASM12003]	Within any contribution packaging a document SHOULD exist directly under the META-INF directory named sca-contribution.xml which lists the SCA Composites within the contribution that are runnable.
[ASM12005]	Where present, artifact-related or packaging-related artifact resolution mechanisms MUST be used by the SCA runtime to resolve artifact dependencies.
[ASM12006] [ASM12006] [ASM12006]	SCA requires that all runtimes MUST support the ZIP packaging format for contributions.
[ASM12007]	Implementations of SCA MAY also raise an error if there are conflicting names exported from multiple contributions.
[ASM12008]	An SCA runtime MAY provide the contribution operation functions (install Contribution, update Contribution, add Deployment Composite, update Deployment Composite, remove Contribution).
[ASM12009]	if there is ever a conflict between two indirect dependent contributions, then the conflict MUST be resolved by an explicit entry in the dependent contribution list.
[ASM12010] [ASM12010] [ASM12010]	Where present, non-SCA artifact resolution mechanisms MUST be used by the SCA runtime in precedence to the SCA mechanisms.
[ASM12011] [ASM12011] [ASM12011]	If one of the non-SCA artifact resolution mechanisms is present, but there is a failure to find the resource indicated when using the mechanism (e.g. the URI is incorrect or invalid, say) the SCA runtime MUST raise an error and MUST NOT attempt to use SCA resolution mechanisms as an alternative.
[ASM12012]	The value of @autowire for the logical Domain composite MUST be autowire="false".
[ASM12013]	For components at the Domain level, with References references for which @autowire="true" applies, the behaviour of the SCA runtime for a given Domain MUST take ONE of the 3 following forms: 1) The SCA runtime MAY disallow disallows deployment of any components with autowire References references. In this case, the SCA runtime MUST raise an exception at the point where the

	<p>component is deployed.</p> <p>2) The SCA runtime MAY evaluateevaluates the target(s) for the reference at the time that the component is deployed and does not update those targets when later deployment actions occur.</p> <p>3) The SCA runtime MAY re-evaluateevaluates the target(s) for the reference dynamically as later deployment actions occur resulting in updated reference targets which match the new Domain configuration. How the new reconfiguration of the reference takes place is described by the relevant client and implementation specifications.</p>
[ASM12014]	Where <wire/> elements are added, removed or replaced by deployment actions, the components whose references are affected by those deployment actions MAY have their references updated by the SCA runtime dynamically without the need to stop and start those components.
[ASM12015]	Where components are updated by deployment actions (their configuration is changed in some way, which includes changing the wires of component references), the new configuration MUST apply to all new instances of those components once the update is complete.
[ASM12016]	An SCA runtime MAY choose to maintain existing instances with the old configuration of components updated by deployment actions, but an SCA runtime MAY choose to stop and discard existing instances of those components.
[ASM12017]	<p>Where a component that is the target of a wire is removed, without the wire being changed, then future invocations of the reference that use that wire SHOULD fail with a ServiceUnavailable fault. If the wire is the result of the autowire process, the SCA runtime MUST:</p> <ul style="list-style-type: none"> • either cause future invocation of the target component's services to fail with a ServiceUnavailable fault • or alternatively, if an alternative target component is available that satisfies the autowire process, update the reference of the source component
[ASM12018]	Where a component that is the target of a wire is updated, future invocations of that reference SHOULD use the updated component.
[ASM12020]	<p>Where a component is added to the Domain that is a potential target for a domain level component reference where that reference is marked as @autowire=true, the SCA runtime MUST:</p> <ul style="list-style-type: none"> • either update the references for the source component once the new component is running. • or alternatively, defer the updating of the references of the source component until the source component is stopped and restarted.
[ASM12021]	The SCA runtime MUST raise an error if an artifact cannot be resolved using these mechanisms, if present.
[ASM12022]	There can be multiple import declarations for a given namespace. Where multiple import declarations are made for the same

	namespace, all the locations specified MUST be searched in lexical order.
[ASM12023]	<p>When a contribution contains a reference to an artifact from a namespace that is declared in an import statement of the contribution, if the SCA artifact resolution mechanism is used to resolve the artifact, the SCA runtime MUST resolve artifacts in the following order:</p> <ol style="list-style-type: none"> 1. 1. from the locations identified by the import statement(s) for the namespace. Locations MUST NOT be searched recursively in order to locate artifacts (i.e. only a one-level search is performed). 2. 2. from the contents of the contribution itself.
[ASM12024]	The SCA runtime MUST ignore local definitions of an artifact if the artifact is found through resolving an import statement.
[ASM12025]	The SCA runtime MUST raise an error if an artifact cannot be resolved by using artifact-related or packaging-related artifact resolution mechanisms, if present, by searching locations identified by the import statements of the contribution, if present, and by searching the contents of the contribution.
[ASM12026]	An SCA runtime MUST make the <import/> and <export/> elements found in the META-INF/sca-contribution.xml and META-INF/sca-contribution-generated.xml files available for the SCA artifact resolution process.
[ASM12027]	An SCA runtime MUST reject files that do not conform to the schema declared in sca-contribution.xsd.
[ASM12028]	An SCA runtime MUST merge the contents of sca-contribution-generated.xml into the contents of sca-contribution.xml, with the entries in sca-contribution.xml taking priority if there are any conflicting declarations.
[ASM12029]	An SCA runtime MAY deploy the composites in <deployable/> elements found in the META-INF/sca-contribution.xml and META-INF/sca-contribution-generated.xml files.
[ASM12030]	For XML definitions, which are identified by QNames, the @namespace attribute of the export element SHOULD be the namespace URI for the exported definitions.
[ASM12031]	When a contribution uses an artifact contained in another contribution through SCA artifact resolution, if that artifact itself has dependencies on other artifacts, the SCA runtime MUST resolve these dependencies in the context of the contribution containing the artifact, not in the context of the original contribution.
[ASM14004][ASM12032]	An SCA runtime SHOULD detect errors at deployment time where these errors can be found through static analysis. Checking for errors in artifacts MUST NOT be done for artifacts in the Installed state (ie where the artifacts are simply part of installed contributions)

[ASM14002][ASM12033]	The SCA runtime SHOULD prevent deployment of contributions that are in error, and raise the error to the process performing the deployment (e.g. write a message to an interactive console or write a message to a log file). Errors in artifacts MUST be detected either during the Deployment of the artifacts, or during the process of putting the artifacts into the Running state.
[ASM12034] [ASM12034]	For a domain level component with a Property whose value is obtained from a Domain-level Property through the use of the @source attribute, if the domain level property is updated by means of deployment actions, the SCA runtime MUST <ul style="list-style-type: none"> either update the property value of the domain level component once the update of the domain property is complete or defer the updating of the component property value until the component is stopped and restarted
[ASM14003]	Where errors are only detected at runtime, when the error is detected an error MUST be raised to the component that is attempting the activity concerned with the error.
[ASM14004][ASM14005]	When an error that could have been detected through static analysis is detected and raised at runtime for a component, the component SHOULD NOT be run until the error is fixed. An SCA Runtime MUST raise an error for every situation where the configuration of the SCA Domain or its contents are in error. The error is either raised at deployment time or at runtime, depending on the nature of the error and the design of the SCA Runtime.

5917

C.2 Non-mandatory Items

Conformance ID	Description	Classification
[ASM60021]	For the case of an un-wired reference with multiplicity 1..1 or 1..n the deployment process provided by an SCA runtime SHOULD issue a warning.	Development
[ASM12002]	Within any contribution packaging A directory resource SHOULD exist at the root of the hierarchy named META-INF	Interoperation
[ASM12003]	Within any contribution packaging a document SHOULD exist directly under the META-INF directory named sca-contribution.xml which lists the SCA Composites within the contribution that are runnable.	Interoperation
[ASM12007]	Implementations of SCA MAY also raise an error if there are conflicting names exported from multiple contributions.	Development
An SCA runtime MAY provide the contribution operation functions (install Contribution, update Contribution, add Deployment Composite, update Deployment Composite, remove	An SCA runtime MAY provide the contribution operation functions (install Contribution, update Contribution, add Deployment Composite, update Deployment Composite, remove Contribution).	Enhancement

Contribution). [ASM12008] [ASM12008]		
[ASM12014]	Where <wire/> elements are added, removed or replaced by deployment actions, the components whose references are affected by those deployment actions MAY have their references updated by the SCA runtime dynamically without the need to stop and start those components.	Enhancement
[ASM12016]	An SCA runtime MAY choose to maintain existing instances with the old configuration of components updated by deployment actions, but an SCA runtime MAY choose to stop and discard existing instances of those components.	Enhancement
[ASM12018]	Where a component that is the target of a wire is updated, future invocations of that reference SHOULD use the updated component.	Enhancement
[ASM12029]	An SCA runtime MAY deploy the composites in <deployable/> elements found in the META-INF/sca-contribution.xml and META-INF/sca-contribution-generated.xml files.	Interoperation
[ASM12030]	For XML definitions, which are identified by QNames, the @namespace attribute of the export element SHOULD be the namespace URI for the exported definitions.	Interoperation
[ASM14001]	An SCA runtime SHOULD detect errors at deployment time where those errors can be found through static analysis.	Development
[ASM14002]	The SCA runtime SHOULD prevent deployment of contributions that are in error, and raise the error to the process performing the deployment (e.g. write a message to an interactive console or write a message to a log file).	Development
[ASM14004]	When an error that could have been detected through static analysis is detected and raised at runtime for a component, the component SHOULD NOT be run until the error is fixed.	Development

5919

D. Acknowledgements

5920 The following individuals have participated in the creation of this specification and are gratefully
 5921 acknowledged:

5922 **Participants:**

5923

Participant Name	Affiliation
Bryan Aupperle	IBM
Ron Barack	SAP AG*
Michael Beisiegel	IBM
Megan Beynon	IBM
Vladislav Bezrukov	SAP AG*
Henning Blohm	SAP AG*
Fraser Bohm	IBM
David Booz	IBM
Fred Carter	AmberPoint
Martin Chapman	Oracle Corporation
Graham Charters	IBM
Shih-Chang Chen	Oracle Corporation
Chris Cheng	Primeton Technologies, Inc.
Vamsavardhana Reddy Chillakuru	IBM
Mark Combella	Avaya, Inc.
Jean-Sebastien Delfino	IBM
David DiFranco	Oracle Corporation
Mike Edwards	IBM
Jeff Estefan	Jet Propulsion Laboratory:*
Raymond Feng	IBM
Billy Feng	Primeton Technologies, Inc.
Paul Fremantle	WSO2*
Robert Freund	Hitachi, Ltd.
Peter Furniss	Iris Financial Solutions Ltd.
Genadi Genov	SAP AG*
Mark Hapner	Sun Microsystems
Zahir HEZOUAT	IBM
Simon Holdsworth	IBM
Sabin Ielceanu	TIBCO Software Inc.
Bo Ji	Primeton Technologies, Inc.
Uday Joshi	Oracle Corporation
Mike Kaiser	IBM
Khanderao Kand	Oracle Corporation
Anish Karmarkar	Oracle Corporation
Nickolaos Kavantzaz	Oracle Corporation
Rainer Kerth	SAP AG*
Dieter Koenig	IBM
Meeraj Kunnumpurath	Individual
Jean Baptiste Laviro	Axway Software*

Simon Laws
Rich Levinson
Mark Little
Ashok Malhotra
Jim Marino
Carl Mattocks
Jeff Mischkinsky
Ian Mitchell
Dale Moberg
Simon Moser
Simon Nash
Peter Niblett
Duane Nickull
Eisaku Nishiyama
Sanjay Patil
Plamen Pavlov
Peter Peshev
Gilbert Pilz
Nilesh Rade
Martin Raeppe
Luciano Resende
Michael Rowley
Vicki Shipkowitz
Ivana Trickovic
Clemens Utschig - Utschig
Scott Vorthmann
Feng Wang
Tim Watson
Eric Wells
Robin Yang
Prasad Yendluri

IBM
Oracle Corporation
Red Hat
Oracle Corporation
Individual
CheckMi*
Oracle Corporation
IBM
Axway Software*
IBM
Individual
IBM
Adobe Systems
Hitachi, Ltd.
SAP AG*
SAP AG*
SAP AG*
Oracle Corporation
Deloitte Consulting LLP
SAP AG*
IBM
Active Endpoints, Inc.
SAP AG*
SAP AG*
Oracle Corporation
TIBCO Software Inc.
Primeton Technologies, Inc.
Oracle Corporation
Hitachi, Ltd.
Primeton Technologies, Inc.
Software AG, Inc.*

5926

F. Revision History

5927 [optional; should not be included in OASIS Standards]

5928

Revision	Date	Editor	Changes Made
1	2007-09-24	Anish Karmarkar	Applied the OASIS template + related changes to the Submission
2	2008-01-04	Michael Beisiegel	<p>composite section</p> <ul style="list-style-type: none"> - changed order of subsections from property, reference, service to service, reference, property - progressive disclosure of pseudo schemas, each section only shows what is described - attributes description now starts with name : type (cardinality) - child element description as list, each item starting with name : type (cardinality) - added section in appendix to contain complete pseudo schema of composite <p>implementation section</p> <ul style="list-style-type: none"> - moved component section after implementation section - made the ConstrainingType section a top level section - moved interface section to after constraining type section <p>component section</p> <ul style="list-style-type: none"> - added subheadings for Implementation, Service, Reference, Property - progressive disclosure of pseudo schemas, each section only shows what is described - attributes description now starts with name : type (cardinality) - child element description as list, each item starting with name : type (cardinality) <p>implementation section</p> <ul style="list-style-type: none"> - changed title to "Implementation and ComponentType" - moved implementation instance related stuff from implementation section to component implementation section - added subheadings for Service, Reference, Property, Implementation - progressive disclosure of pseudo schemas, each section only shows what is described - attributes description now starts with name : type (cardinality) - child element description as list, each item starting with name : type (cardinality) - attribute and element description still needs to be completed, all implementation statements

			<p>on services, references, and properties should go here</p> <ul style="list-style-type: none"> - added complete pseudo schema of componentType in appendix - added "Quick Tour by Sample" section, no content yet - added comment to introduction section that the following text needs to be added <ul style="list-style-type: none"> "This specification is defined in terms of infoset and not XML 1.0, even though the spec uses XML 1.0/1.1 terminology. A mapping from XML to infoset (... link to infoset specification ...) is trivial and should be used for non-XML serializations."
3	2008-02-15	Anish Karmarkar Michael Beisiegel	<p>Incorporated resolutions from 2008 Jan f2f.</p> <ul style="list-style-type: none"> - issue 9 - issue 19 - issue 21 - issue 4 - issue 1A - issue 27 - in Implementation and ComponentType section added attribute and element description for service, reference, and property - removed comments that helped understand the initial restructuring for WD02 - added changes for issue 43 - added changes for issue 45, except the changes for policySet and requires attribute on property elements - used the NS http://docs.oasis-open.org/ns/opencsa/sca/200712 - updated copyright stmt - added wordings to make PDF normative and xml schema at the NS uri authoritative
4	2008-04-22	Mike Edwards	<p>Editorial tweaks for CD01 publication:</p> <ul style="list-style-type: none"> - updated URL for spec documents - removed comments from published CD01 version - removed blank pages from body of spec
5	2008-06-30	Anish Karmarkar Michael Beisiegel	<p>Incorporated resolutions of issues: 3, 6, 14 (only as it applies to the component property element), 23, 25, 28, 25, 38, 39, 40, 42, 45 (except for adding @requires and @policySets to property elements), 57, 67, 68, 69</p>
6	2008-09-23	Mike Edwards	<p>Editorial fixes in response to Mark Combella's review contained in email: http://lists.oasis-open.org/archives/sca-assembly/200804/msg00089.html</p>
7 CD01 - Rev3	2008-11-18	Mike Edwards	<ul style="list-style-type: none"> • Specification marked for conformance statements. New Appendix (D) added

			containing a table of all conformance statements. Mass of related minor editorial changes to remove the use of RFC2119 words where not appropriate.
8 CD01 - Rev4	2008-12-11	Mike Edwards	<ul style="list-style-type: none"> - Fix problems of misplaced statements in Appendix D - Fixed problems in the application of Issue 57 - section 5.3.1 & Appendix D as defined in email: http://lists.oasis-open.org/archives/sca-assembly/200811/msg00045.html - Added Conventions section, 1.3, as required by resolution of Issue 96. - Issue 32 applied - section B2 - Editorial addition to section 8.1 relating to no operation overloading for remotable interfaces, as agreed at TC meeting of 16/09/2008.
9 CD01 - Rev5	2008-12-22	Mike Edwards	<ul style="list-style-type: none"> - Schemas in Appendix B updated with resolutions of Issues 32 and 60 - Schema for contributions - Appendix B12 - updated with resolutions of Issues 53 and 74. - Issues 53 and 74 incorporated - Sections 11.4, 11.5
10 CD01-Rev6	2008-12-23	Mike Edwards	<ul style="list-style-type: none"> - Issues 5, 71, 92 - Issue 14 - remaining updates applied to ComponentType (section 4.1.3) and to Composite Property (section 6.3)
11 CD01-Rev7	2008-12-23	Mike Edwards	<p>All changes accepted before revision from Rev6 started - due to changes being applied to previously changed sections in the Schemas</p> <ul style="list-style-type: none"> Issues 12 & 18 - Section B2 Issue 63 - Section C3 Issue 75 - Section C12 Issue 65 - Section 7.0 Issue 77 - Section 8 + Appendix D Issue 69 - Sections 5.1, 8 Issue 45 - Sections 4.1.3, 5.4, 6.3, B2. Issue 56 - Section 8.2, Appendix D Issue 41 - Sections 5.3.1, 6.4, 12.7, 12.8, Appendix D
12 CD01-Rev8	2008-12-30	Mike Edwards	<ul style="list-style-type: none"> Issue 72 - Removed Appendix A Issue 79 - Sections 9.0, 9.2, 9.3, Appendix A.2 Issue 62 - Sections 4.1.3, 5.4 Issue 26 - Section 6.5 Issue 51 - Section 6.5 Issue 36 - Section 4.1 Issue 44 - Section 10, Appendix C Issue 89 - Section 8.2, 8.5, Appendix A, Appendix C Issue 16 - Section 6.8, 9.4 Issue 8 - Section 11.2.1 Issue 17 - Section 6.6 Issue 30 - Sections 4.1.1, 4.1.2, 5.2, 5.3, 6.1, 6.2, 9 Issue 33 - insert new Section 8.4
12 CD01-Rev8a	2009-01-13	Bryan Aupperle Mike Edwards	Issue 99 - Section 8

13 CD02	2009-01-14	Mike Edwards	All changes accepted All comments removed
14 CD02-Rev2	2009-01-30	Mike Edwards	Issue 94 applied (removal of conversations)
15 CD02-Rev3	2009-01-30	Mike Edwards	Issue 98 - Section 5.3 Minor editorial cleanup (various locations) Removal of <operation/> element as decided at Jan 2009 F2F - various sections Issue 95 - Section 6.2 Issue 2 - Section 2.1 Issue 37 - Sections 2.1, 6, 12.6.1, B10 Issue 48 - Sections 5.3, A2 Issue 90 - Sections 6.1, 6.2, 6.4 Issue 64 - Sections 7, A2 Issue 100 - Section 6.2 Issue 103 - Sections 10, 12.2.2, A.13 Issue 104 - Sections 4.1.3, 5.4, 6.3 Section 3 (Quick Tour By Sample) removed by decision of Jan 2009 Assembly F2F meeting
16 CD02-Rev4	2009-02-06	Mike Edwards	All changes accepted Major Editorial work to clean out all RFC2119 wording and to ensure that no normative statements have been missed.
16 CD02-Rev6	2009-02-24	Mike Edwards	Issue 107 - sections 4, 5, 11, Appendix C Editorial updates resulting from Review Issue 34 - new section 12 inserted, + minor editorial changes in sections 4, 11 Issue 110 - Section 8.0 Issue 111 - Section 4.4, Appendix C Issue 112 - Section 4.5 Issue 113 - Section 3.3 Issue 108 - Section 13, Appendix C Minor editorial changes to the example in section 3.3
17 CD02-Rev7	2009-03-02	Mike Edwards	Editorial changes resulting from Vamsi's review of CD02 Rev6 Issue 109 - Section 8, Appendix A.2, Appendix B.3.1, Appendix C Added back @requires and @policySets to <interface/> as editorial correction since they were lost by accident in earlier revision Issue 101 - Section 13 Issue 120 - Section
18 CD02-Rev 8	2009-03-05	Mike Edwards	XSDs corrected and given new namespace. Namespace updated throughout document.
19 CD03	2009-03-05	Mike Edwards	All Changes Accepted
20 CD03	2009-03-17	Anish Karmarkar	Changed CD03 per TC's CD03/PR01 resolution. Fixed the footer, front page.
21 CD03 Rev1	2009-06-16	Mike Edwards	Issue 115 - Sections 3.1.3, 4.4, 5.3, A.2 Editorial: Use the form "portType" in all cases when referring to WSDL portType Issue 117 - Sections 4.2, 4.3, 5.0, 5.1, 5.2, 5.4, 5.4.2, 6.0, add new 7.2, old 7.2 Note: REMOVED assertions: ASM60015 ASM60015 ASM60016 ASM60017

			ASM60018 ASM60019 ASM60020 ASM60023 ASM60024 ASM80012 ASM80013 ASM80014 ASM80015 ADDED ASM70007 Issue 122 - Sections 4.3, 4.3.1, 4.3.1.1, 6.0, 8.0, 11.6 Issue 123 - Section A.2 Issue 124 - Sections A2, A5 Issue 125 - Section 7.6 Editorial - fixed broken reference links in Sections 7.0, 11.2 Issue 126 - Section 7.6 Issue 127 - Section 4.4, added Section 4.4.1 Issue 128 - Section A2 Issue 129 - Section A2 Issue 130 - multiple sections Issue 131 - Section A.11 Issue 135 - Section 8.4.2 Issue 141 - Section 4.3
22 CD03 Rev2	2009-07-28	Mike Edwards	Issue 151 - Section A.2 Issue 133 - Sections 7, 11.2 Issue 121 - Section 13.1, 13.2, C.1, C.2 Issue 134 - Section 5.2 Issue 153 - Section 3.2, 5.3.1
23 CD03 Rev3	2009-09-23	Mike Edwards	Major formatting update - all snippets and examples given a caption and consistent formatting. All references to snippets and examples updated to use the caption numbering. Issue 147 - Section 5.5.1 added Issue 136 - Section 4.3, 5.2 Issue 144 - Section 4.4 Issue 156 - Section 8 Issue 160 - Section 12.1 Issue 176 - Section A.5 Issue 180 - Section A.1 Issue 181 - Section 5.1, 5.2
24 CD03 Rev4	2009-09-23	Mike Edwards	All changes accepted Issue 157 - Section 6 removed, other changes scattered through many other sections, including the XSDs and normative statements. Issue 182 - Appendix A
25 CD03 Rev5	2009-11-20	Mike Edwards	All changes accepted Issue 138 - Section 10.3 added Issue 142 - Section 4.3 updated Issue 143 - Section 7.5 updated Issue 145 - Section 4.4 updated Issue 158 - Section 5.3.1 updated Issue 183 - Section 7.5 updated Issue 185 - Section 10.9 updated
26 CD03 Rev6	2009-12-03	Mike Edwards	All changes accepted Issue 175 - Section A2 updated Issue 177 - Section A2 updated Issue 188 - Sections 3.1.1, 3.1.2, 3.1.4, 4, 4.1, 4.2, 4.3, 5, 5.1, 5.2, 6, 6.6, 7, 7.5, 9, A2 updated Issue 192 - editorial fixes in Sections 5.1, 5.2,

			5.4.1, 5.5, 5.6.1 SCA namespace updated to http://docs.oasis- open.org/ns/opencsa/sca/200912 as decided at Dec 1st F2F meeting - changes scattered through the document Issue 137 - Sections 5.4, 7 updated Issue 189 - Section 6.5 updated
27 CD04	2009-12-09	Mike Edwards	All changes accepted

5929